

FS190 Series

Excess Flow Shut-Off Valve
 Stainless Steel



Value Proposition:

The FS190 is a non-attitude sensitive, excess flow shut-off valve designed to operate with a wide range of inlet pressures.

The capability of operating from 10 to 3500 psig allows it to be used either between a high pressure source at the inlet to the pressure regulator or in the low pressure delivery line to a process. In both applications, this control valve will automatically shut off the delivery of gas if the flow exceeds a preset limit.



Contact Information:

Parker Hannifin Corporation
Veriflo Division
 250 Canal Blvd
 Richmond, California 94804

phone 510 235 9590
 fax 510 232 7396
 veriflo.sales@parker.com


www.parker.com/veriflo
 Mobile App: m.parker.com/veriflo

Product Features:

- Offered with 6 different pressure/flow limits
- Differential pressure that is created is not affected by mounting orientation (non-attitude sensitive)
- Cleaned for O₂ service
- Actuating knob designed to manually operate valve and clearly indicate relative operating position - Open (Reset) or Auto (Shut off)
- Pneumatic actuator available to reset the valve remotely

FS190 Series


Dimensional Drawing

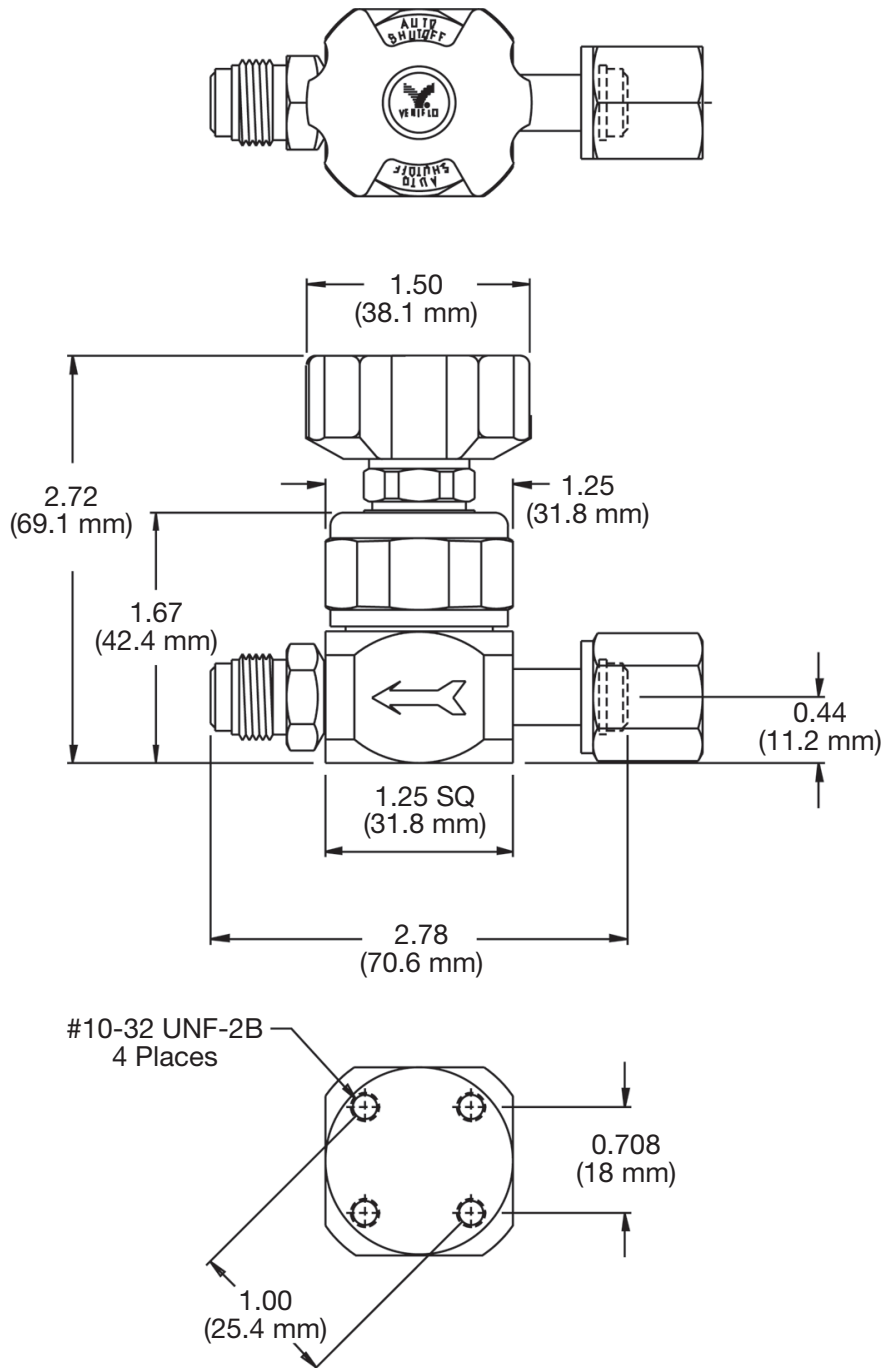

Safety Guide and Installation and Operating Instructions available at
www.parker.com/veriflo

FS190 Series

Sizing Chart

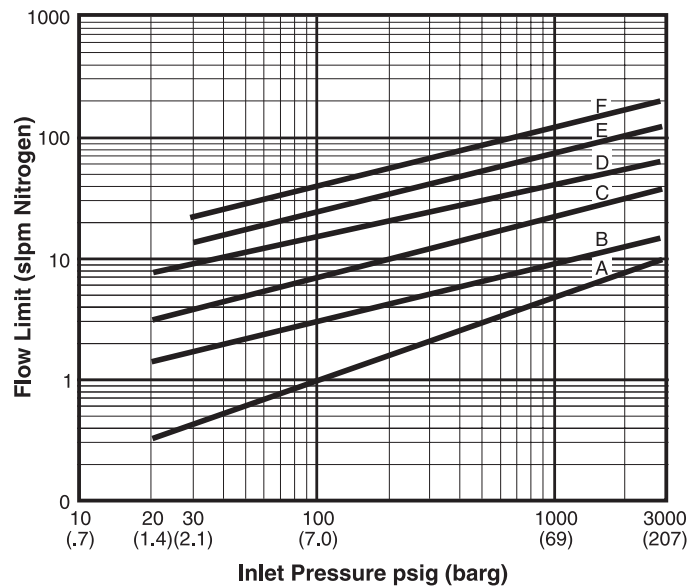

Ordering Information

Build an FS190 Series valve by replacing the numbered symbols with an option from the corresponding tables below.

Color Explanations: Black = Standard Lead Time Configurations | *For an explanation of Ordering options please reference literature 25000275 at www.parker.com/veriflo*
 Blue = Extended Lead Time Configurations
 Green *Italic* = Express Service Program (ESP)

Sample: **FS190** **1** **2** **3** **4**
 S **A** **FSFM** **AOP**
 Finished Order: **FS190SAFSFMAOP**

1 Material
 S = 316L Stainless Steel

2 Flow Limit Setting
 Nominal Flow Limit at:

	1000 psig Inlet	30 psig Inlet
A	= 4.8 SLPM	0.4 SLPM
B	= 9.1 SLPM	1.7 SLPM
C	= 21.8 SLPM	3.9 SLPM
D	= 39.5 SLPM	9.0 SLPM
E	= 72.3 SLPM	14.4 SLPM
F	= 120.6 SLPM	22.5 SLPM

3 Connection (Inlet & Outlet)
 P = 1/4" NPTF
 FSMM = 1/4" FS Male In, Male Out
 FSFF = 1/4" FS Female In, Female Out
 FSFM = 1/4" FS Female In, Male Out
 FSMF = 1/4" FS Male In, Female Out
 TS = 1/4" Welded Tube Stubs

4 Optional Features
 This section can have multiple options

AOP = Air Operated
 EX = 10 Ra microinch Finish *Not available with P Connection option*
 TH = Hastelloy C-22® Trim Internals *Includes compression member, poppet, spring and orifice*
 3.46 = FLV 110 Dimensional Replacement *3.46" end-to-end dimensions*
 3.70 = FLV 120 Dimensional Replacement *3.70" end-to-end dimensions*
 5.25 = 5.25" end-to-end dimensions
 5.75 = 5.75" end-to-end dimensions

Additional configurations available upon request

FS190 Series

Specifications

Materials of Construction	
Wetted	
Body	VeriClean™ 316L Stainless Steel
Compression Member Options	316L Stainless Steel (std) or Hastelloy C-22®
Diaphragm	Elgiloy® or equivalent
Poppet Options	316L Stainless Steel (std) or Hastelloy C-22®
Spring	Hastelloy C-22®
Orifice Options	316L Stainless Steel (std) or Hastelloy C-22®
Seat	PCTFE
Non-wetted	
Cap	316L Stainless Steel
Stem	303 Stainless Steel
Knob	Aluminum (Red)
Operating Conditions	
Temperature	-10°F to 150°F (-23°C to 66°C)
Supply Pressure	<i>Based upon Flow Limit Setting</i>
A - D Flow Limits:	10 psig to 3,500 psig (0.7 barg to 241 barg)
E - F Flow Limits:	20 psig to 3,500 psig (1.4 barg to 241 barg)
Differential Pressure	5 psig or 12 psig (0.3 barg or 0.8 barg)
Flow Limit Settings	6 available - <i>see ordering info</i>

Functional Performance	
Design	
Burst Pressure	10,500 psig (724 barg)
Proof Pressure	5,250 psig (362 barg)
Leak Rate	
Internal	Bubble Tight
External (NPT Threaded)	Bubble Tight
External (Welded)	< 2 x 10 ⁻¹⁰ scc/sec He Inboard Test Method
Internal Volume	1.86 cc (<i>including Face Seal Fittings</i>)
Approx. Weight	12.5 oz. (0.32 kg)
Surface Finishes	
Standard	15 - 20 micro inch Ra (0.38 to 0.5 micrometer) or less
Optional (EX)	10 micro inch Ra (0.25 micrometer) or less - <i>not available with 1/4" NPTF Inlet and Outlet connection option (P)</i>

Elgiloy® is a registered trademark of Elgiloy Company
Hastelloy C-22® is a registered trademark of Haynes International, Inc.
VeriClean™ is a trademark of Parker Hannifin Corporation.

For additional information on materials of construction, functional performance and operating conditions, please contact factory.

OFFER OF SALE:

The items described in this document are hereby offered for sale by Parker-Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by the provisions stated in the detailed "Offer of Sale" elsewhere in this document or available at www.parker.com/veriflo



FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE. THIS DOCUMENT IS FOR REFERENCE ONLY. PLEASE CONSULT FACTORY FOR LATEST PRODUCT DRAWINGS AND SPECIFICATIONS

This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.

The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.

To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing are subject to change by Parker Hannifin Corp and its subsidiaries at any time without notice.

Proposition 65 Warning: This product contains chemicals known to the state of California to cause cancer or birth defects or other reproductive harm.

© 2007 Parker Hannifin Corporation



Use mobile device to scan this QR Code.

LitPN: 25000034

Rev: D

Date of Issue 04/2013



Hanley Controls Clonmel Ltd
Gortnafleur, Clonmel, Co. Tipperary
Tel: +353 (0)52 6122722
e-mail: info@hccl.ie
web: www.hccl.ie

ENGINEERING YOUR SUCCESS.