


Industrial Blowguns

Polymer

Metal

Kits

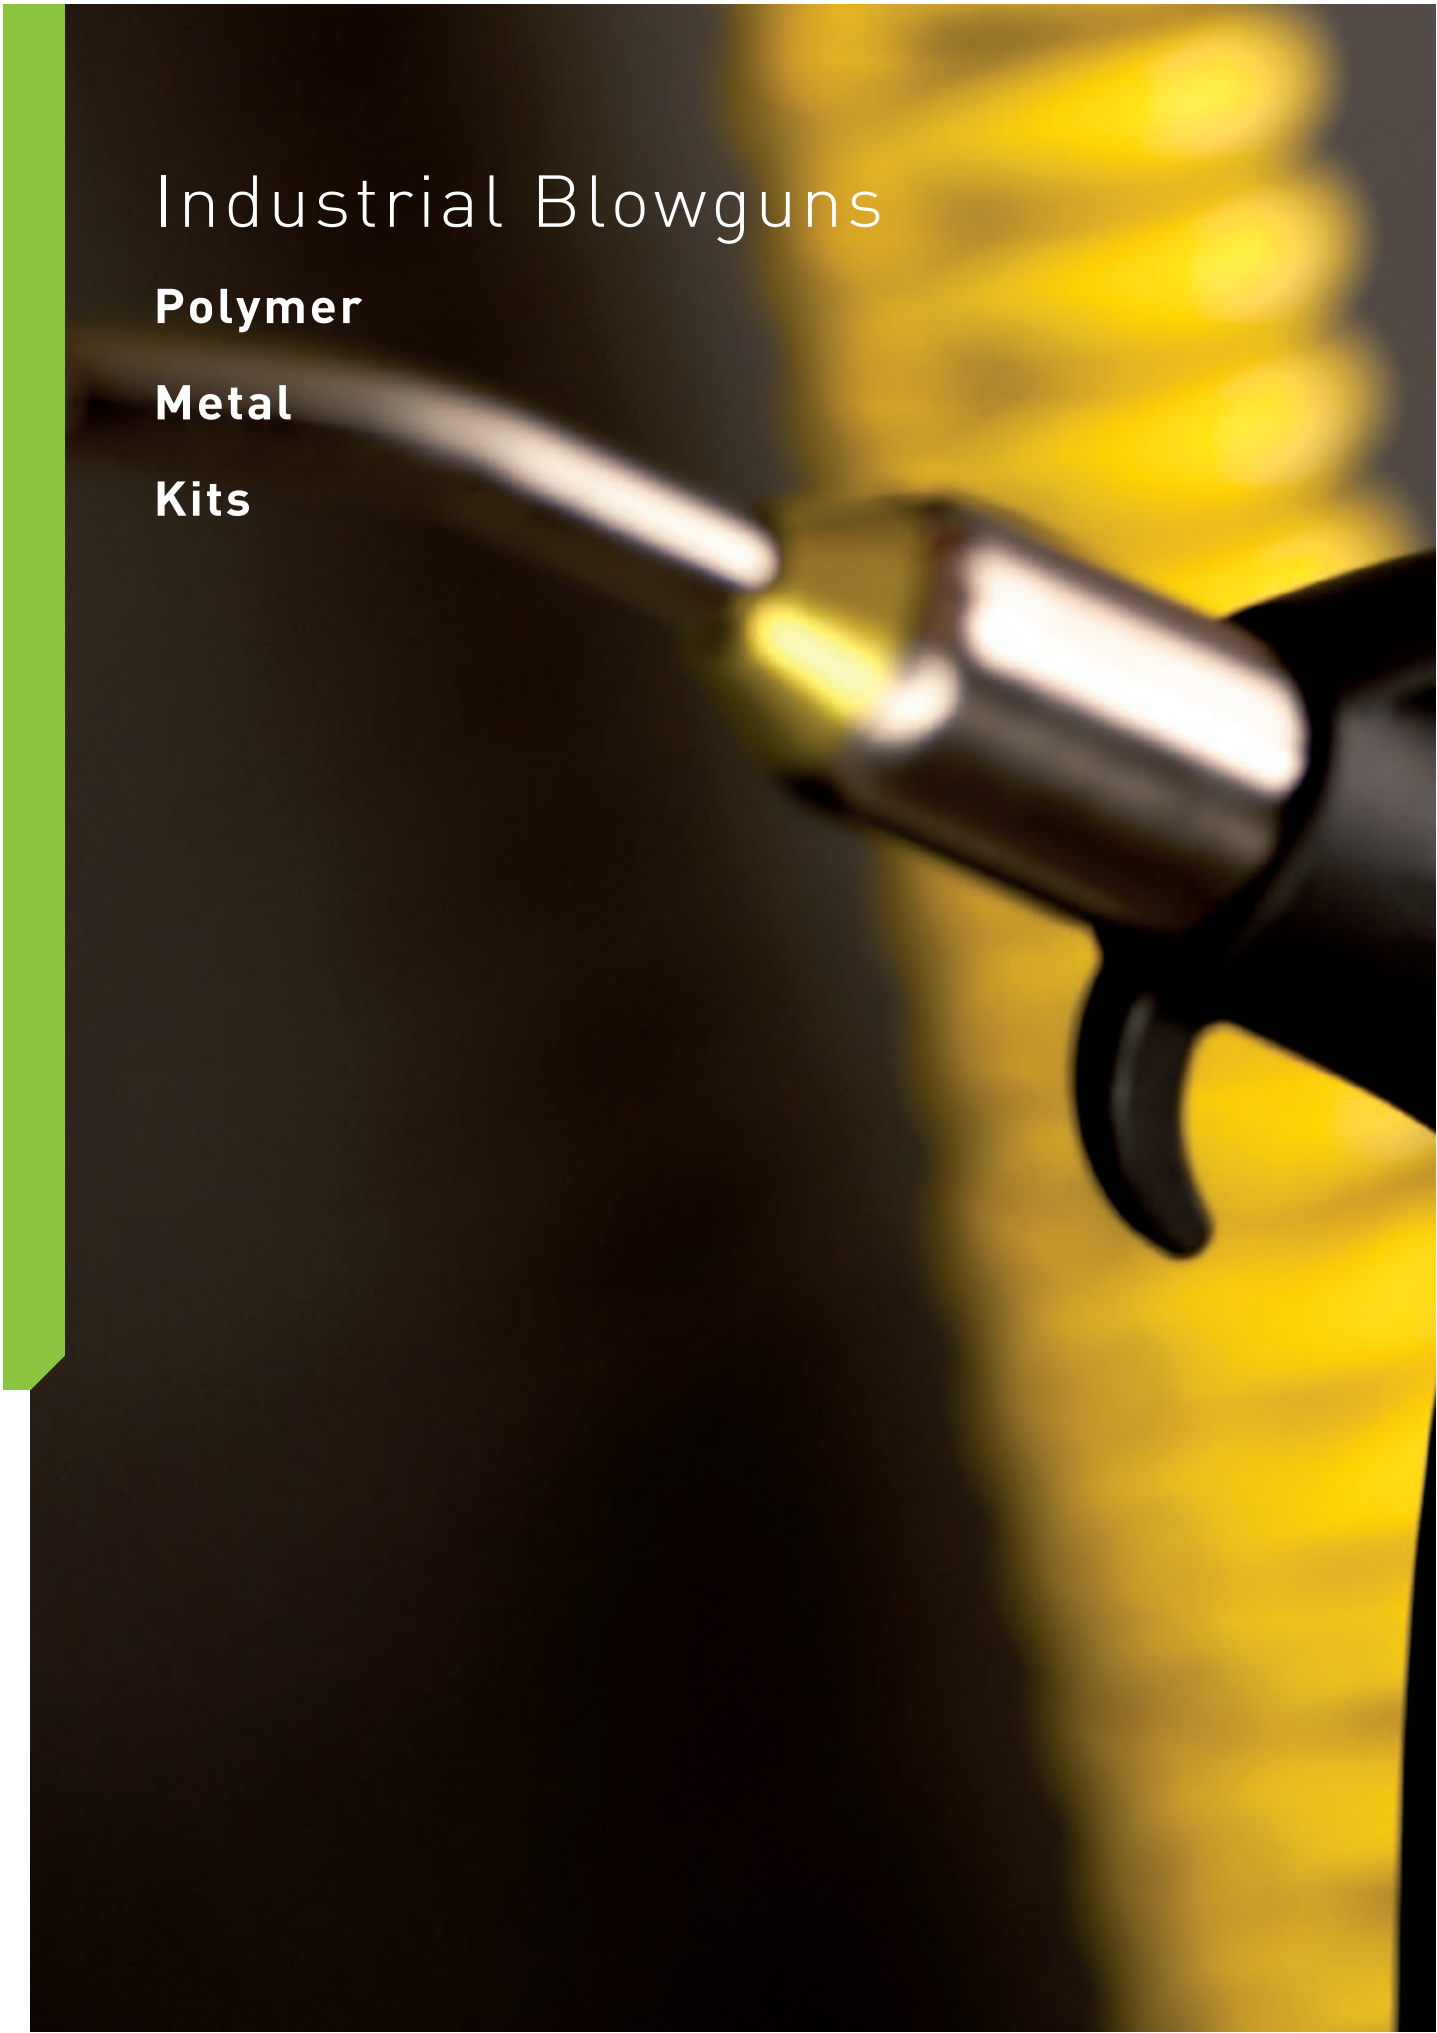



Blowguns

Standard Blowgun (P. 7-7)



Fluids: compressed air
Materials: technical polymer, NBR
Pressure: 10 bar
Temperature: -15°C to +50°C
 (DN) : 3.5 mm

Safety Blowgun (P. 7-7)



Fluids: compressed air
Materials: technical polymer, NBR
Pressure: 10 bar
Temperature: -15°C to +50°C
 (DN) : 3 mm

Energy-Saving Blowgun (P. 7-8)



Fluids: compressed air
Materials: technical polymer, NBR
Pressure: 10 bar
Temperature: -15°C to +50°C
 (DN) : according to nozzle

Versatile Blowguns (P. 7-6)



Fluids: compressed air
Materials: technical polymer, NBR
Pressure: 10 bar
Temperature: -15°C to +50°C
 (DN) : according to nozzle

Metal Blowguns (P. 7-14)



Fluids: compressed air
Materials: forged nickel-plated brass, NBR
Pressure: 10 bar
Temperature: -15°C to +50°C
 (DN) : 2 mm

Water Pistol (P. 7-14)



Fluids: industrial fluids and water
Materials: zamak, NBR
Pressure: 20 bar
Temperature: -20°C to +100°C
 (DN) : 12 mm

Blowgun Kits (P. 7-16)



Fluids: compressed air
Materials: technical polymer
Pressure: 10 bar
Temperature: -15°C to +50°C
 (DN) : according to model

Nozzles (P. 7-11)



Fluids: compressed air
Materials: nickel-plated brass
Pressure: 10 bar
Temperature: -15°C to +50°C
 (DN) : according to model

Blowgun Range

Polymer Blowguns

Standard

0659

Page 7-7



Safety

0654

Page 7-7



SUVA Safety

0654

Page 7-7



Energy-Saving

0653

Lower Connection
Interchangeable Nozzle
Page 7-8



0653

Lower Connection
Page 7-8



With Interchangeable Nozzle

0652

Lower Connection
Page 7-8



0655

Upper Connection
Page 7-8



Pre-Assembled with Nozzle

0651

Lower Connection
Page 7-9



0658

Upper Connection
Page 7-9



0656

Lower Connection
Page 7-9



0657

Upper Connection
Page 7-9



Merchandising Box

065.. 13 02

Page 7-10



Nozzles for Polymer Blowguns

0690 01

Standard
Page 7-11



0690 02

Safety
Page 7-11



0690 03

Straight Tube (long)
Page 7-11



0690 04

Straight Tube (short), Safety
Page 7-11



0690 05

Angled Tube (long)
Page 7-11



0690 06

Angled Tube (short) Safety
Page 7-12



0690 06 01

Angled Tube (short)
Page 7-12



0690 07

LF 3000® Nozzle
Page 7-12



0690 08

Coanda
Page 7-12



0690 09

Air Screen
Page 7-12



0690 10

Booster
Page 7-13



0690 11

Booster with Air Screen
Page 7-13



Metal Blowguns

Lever-Operated

0623

Page 7-15



Button-Operated

0622

Page 7-15



Water Pistol

2299

Page 7-15



2299

Page 7-15



Blowgun Kits

0631..09

Standard
Page 7-17



0631..01

Safety
Page 7-17



0631..30

Safety, SUVA-Certified
Page 7-17



0631..23

Energy-Saving
Page 7-17



0631..03

Standard Nozzle
Page 7-18



0631..05

Angled Nozzle, Safety
Page 7-18



0631..07

Interchangeable Nozzle
Page 7-18



0631..08

Energy-Saving
Interchangeable Nozzle
Page 7-18



Polymer Blowguns

The Parker Legris polymer blowgun offers **ease of use**, **energy saving**, adaptability and efficiency. These blowguns comply with **international regulations** for health, **safety** and **noise** levels.

Product Advantages

Quality & Performance

Comply with international standards for noise and pressure regulation
Powerful flow with progressive control
Rotating nozzle for directional jet
Durable, shock-resistant materials
100% leak and flow-tested in production
Date coding to guarantee quality and traceability

Safety & Sustainable Development

40% energy consumption reduction with Energy-Saving model
Complete user safety with the Safety model
Wide selection of nozzles which comply with noise and pressure level regulations

Ergonomics & Versatility

Comfortable to use
Lightweight and easy to use
Wide range of models and nozzles for optimum blowing power and flow rate
Lower or upper connection



Manufacturing Workshops

Cleaning
Blowing
Mixing
Ejection
Cooling
Packaging

Applications

Technical Characteristics

Compatible Fluids	Compressed air Other fluids: contact us
Working Pressure	0 to 10 bar
Working Temperature	Air: -15°C to +50°C Dry air: -20°C to +80°C
Tubes	Recoil tubes and hose

Regulations

Compliance for all blowguns:

DI: 97/23/EC (PED)
DI: 2002/95/EC (RoHS),
2011/65/EC
DI: 1907/2006 (REACH)

Protection of design

All designs and models of Parker Legris blowguns have been registered with the following numbers:
13224 / 13225 / 13226.

Compliance for specific blowguns:

DI: 1910.242 (b) [OSHA]
The static pressure must be less than 30 psi in case the nozzle becomes blocked.
DI: 1910.95 (b) [OSHA]
The noise level must be less than 90 dBA over 8 hours' exposure.
DI: 2003/10/EC
Regulation relating to exposure to noise, particularly with regard to risks to hearing. The noise level must be less than 87 dBA.

Component Materials



Silicone-free



Polymer Blowguns

0659 Standard Blowgun, Lower Connection with Short Angled Nozzle, Female BSPP Thread

Technical polymer, nickel-plated brass, treated aluminium, NBR

C	DN		F	H	L	Kg
G1/4	3.5	0659 00 13	20	120	223	0.072

Nozzle: aluminium, NPT version available

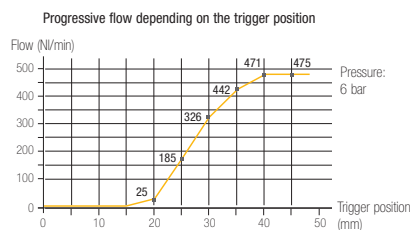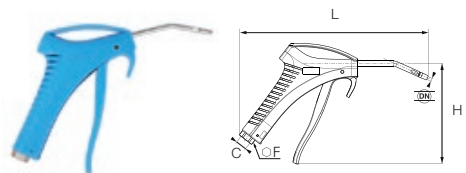



- 475 Nl/min
- 82 dBA
- OSHA 1910.242 (b)
OSHA 1910.95 (b)
2003/10/EC directive:
Requirement to use ear protection
if exposure > 8 hours

0654 Safety Blowgun, Lower Connection, Female BSPP Thread

Technical polymer, nickel-plated brass, NBR

C	DN		F	H	H1	L	L1	Kg
G1/4	3	0654 00 13	20	117	35	148	73	0.189

Nozzle: nickel-plated brass, NPT version available.

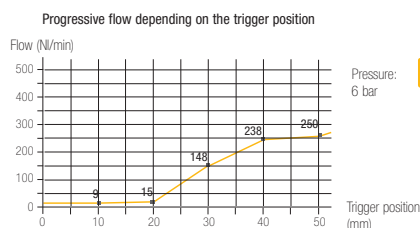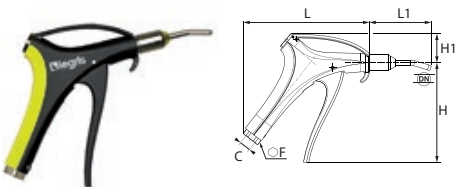



- 250 Nl/min
- 80 dBA
- OSHA 1910.242 (b)
OSHA 1910.95 (b)
2003/10/EC directive:
No ear defenders necessary

0654 SUVA Safety Blowgun, Lower Connection, Female BSPP Thread

Technical polymer, nickel-plated brass, NBR

C	DN		F	H	H1	L	L1	Kg
G1/4	3	0654 00 13	20	117	35	148	73	0.189

Nozzle: nickel-plated brass, NPT version available.

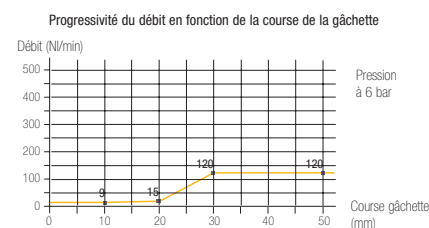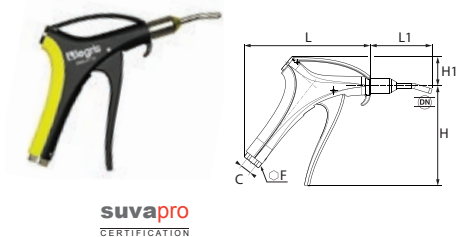

- 120 Nl/min
- 80 dBA
- OSHA 1910.242 (b)
OSHA 1910.95 (b)
Directive 2003/10/CE :
Aucun écouteur auditif nécessaire
SUVA: 7030d et 7030e



Maximum Flow Rate
(tolerance +/-10%)



Noise Level
ISO 15744



Diffusion
Cone



Compliance
with Standards

Operation: Safety Blowgun



Flow stopped completely and pressure reduced to 0.5 bar

Operation: Blowgun with Safety Nozzle




Flow diverted and pressure reduced to 0.5 bar

ECO
DESIGN

Polymer Blowguns

0653 Energy Saving Blowgun, Lower Connection with Interchangeable Nozzle, Female BSPP Thread

Technical polymer, nickel-plated brass, NBR




C	C1		F	H	H1	L	Kg
G1/4	M12x1.25	0652 66 13	20	117	34	147	0.163

Flow characteristics depend on the type of nozzle used.

Delivered without nozzle.

Progressive flow depending on the trigger position

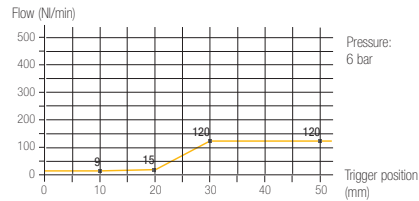

Pressure:
6 bar



120 Nl/min

Flow produced with
nozzle 0690 01 00

80 dBA


Noise level measured
without nozzle



OSHA 1910.242 (b):
Depends on type of nozzle
OSHA 1910.95 (b)
2003/10/EC directive:
No ear defenders necessary

0653 Energy Saving Blowgun, Lower Connection with Short Angled Nozzle, Female BSPP Thread

Technical polymer, nickel-plated brass, NBR




C	C1		F	H	H1	L	L1	Kg
G1/4	M12x1.25	0653 02 13	20	117	34	147	78	0.144

Flow characteristics depend on the type of nozzle used, delivered without nozzle.

An energy saving calculator is available.

Progressive flow depending on the trigger position

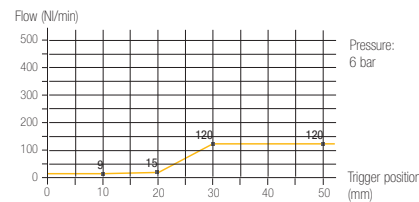

Pressure:
6 bar



120 Nl/min

Flow produced with
nozzle 0690 01 00

80 dBA


Noise level measured
without nozzle



OSHA 1910.242 (b):
Depends on type of nozzle
OSHA 1910.95 (b)
2003/10/EC directive:
No ear defenders necessary

0652 Progressive Control Blowgun, Lower Connection with Interchangeable Nozzle, Female BSPP Thread

Technical polymer, nickel-plated brass, NBR



C	C1		F	H	H1	L	Kg
G1/4	M12x1.25	0652 66 13	20	117	34	147	0.163

Flow characteristics depend on the type of nozzle used.

Delivered without nozzle.



Depending on the type of nozzle

86 dBA


Noise level measured
without nozzle



OSHA 1910.242 (b):
Depends on type of nozzle
OSHA 1910.95 (b)
2003/10/EC directive:
Requirement to use ear protection
if exposure > 8 hours

0655 Progressive Control Blowgun, Upper Connection with Interchangeable Nozzle, Female BSPP Thread

Technical polymer, nickel-plated brass, NBR



C		F	H	H1	L	Kg
G1/4	0655 66 13	20	117	37	145	0.163

Flow characteristics depend on the type of nozzle used.

Delivered without nozzle.



Depending on the type of nozzle

86 dBA

Noise level measured
without nozzle




OSHA 1910.242 (b):
Depends on type of nozzle
OSHA 1910.95 (b)
2003/10/EC directive:
Requires ear defenders to be
used when exposure is > 8 hours

Polymer Blowguns

0651 Progressive Control Blowgun, Lower Connection with Standard Nozzle, Female BSPP Thread


Technical polymer, nickel-plated brass, NBR



C	DN		F	H	H1	L	L1	Kg
G1/4	2.5	0651 66 13	20	117	34	147	10	0.168

Nozzle: nickel-plated brass

Progressive flow depending on the trigger position

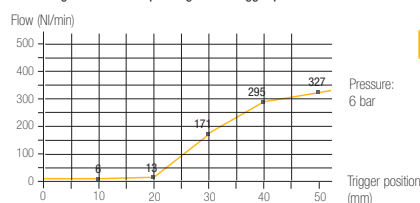

327 Nl/min Flow produced with nozzle 0690 01 00

86 dBA




Pressure: 6 bar



OSHA 1910.95 (b)
2003/10/EC directive:
Requirement to use ear protection
if exposure > 8 hours

0658 Progressive Control Blowgun, Upper Connection with Standard Nozzle, Female BSPP Thread


Technical polymer, nickel-plated brass, NBR



C	DN		F	H	H1	L	L1	Kg
G1/4	2.5	0658 66 13	20	117	37	145	10	0.195

Nozzle: nickel-plated brass

Progressive flow depending on the trigger position

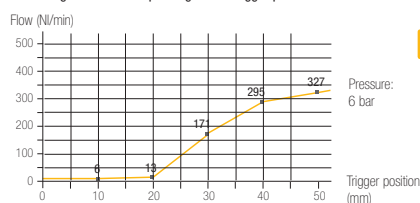

327 Nl/min Flow produced with nozzle 0690 01 00

86 dBA




Pressure: 6 bar



OSHA 1910.95 (b)
2003/10/EC directive:
Requirement to use ear protection
if exposure > 8 hours

0656 Progressive Control Blowgun, Lower Connection with Short Angled Nozzle, Female BSPP Thread


Technical polymer, nickel-plated brass, NBR



C	DN		F	H	H1	L	L1	Kg
G1/4	2.5	0656 66 13	20	117	34	147	81	0.173

Nozzle: nickel-plated brass

Progressive flow depending on the trigger position

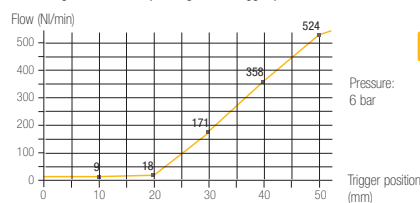

524 Nl/min Flow produced with nozzle 0690 06 01

86 dBA




Pressure: 6 bar



OSHA 1910.242 (b)
OSHA 1910.95 (b)
2003/10/EC directive:
Requirement to use ear protection
if exposure > 8 hours

0657 Safety Progressive Control Blowgun, Upper Connection with Short Angled Nozzle, Female BSPP Thread


Technical polymer, nickel-plated brass, NBR



C	DN		F	H	H1	L	L1	Kg
G1/4	2.5	0657 66 13	20	117	37	145	82	0.168

Nozzle: nickel-plated brass

Progressive flow depending on the trigger position

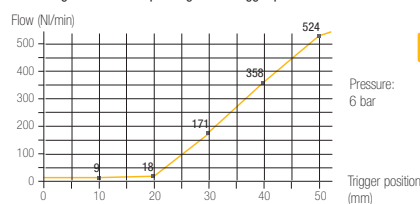

524 Nl/min Flow produced with nozzle 0690 06 01

86 dBA



Pressure: 6 bar



OSHA 1910.242 (b)
OSHA 1910.95 (b)
2003/10/EC directive:
Requirement to use ear protection
if exposure > 8 hours

Merchandising Box of Polymer Blowguns

0659 Merchandising Box - 10 Standard Blowguns



0659 00 13 02

The box includes 10 blowguns 0659 00 13.

L	H	L1	Kg
28	16	20	1.720

0654 Merchandising Box - 10 Safety Blowguns



0654 00 13 02

The box includes 10 blowguns 0654 00 13.

L	H	L1	Kg
28	16	20	1.890

0654 Merchandising Box - 10 SUVA Safety Blowguns



0654 01 13 02

The box includes 10 blowguns 0654 01 13.

L	H	L1	Kg
28	16	20	2.356

suva
pro
CERTIFICATION

0653 Merchandising Box - 10 Energy-Saving Blowguns



0653 02 13 02

The box includes 10 blowguns 0653 02 13.

L	H	L1	Kg
28	16	20	1.900

0656 Merchandising Box - 10 Progressive Control Blowguns



0656 66 13 02


The box includes 10 blowguns 0656 66 13.

L	H	L1	Kg
28	16	20	1.730

Nozzles for Polymer Blowguns

0690 01 Standard Nozzle

Nickel-plated brass



C	DN		G	L	L1	Kg
M12x1.25	2.5	0690 01 00	15	31	9	0.023



327 NI/min

86 dBA


23°

- Versatile use
- Progressive and powerful air jet

OSHA 1910.95 (b)
2003/10/EC directive:
Requirement to use ear protection
if exposure > 8 hours

0690 02 Safety Nozzle

Nickel-plated brass



C	DN		G	L	L1	Kg
M12x1.25	2.5	0690 02 00	15	31	9	0.024



315 NI/min

83 dBA


26°

- Fluidised Powders
- Air screen effect
- Safety: avoids the nozzle becoming completely blocked

OSHA 1910.95 (b)/1910.242 (b)
2003/10/EC directive:
Requirement to use ear protection
if exposure > 8 hours

0690 03 Straight Nozzle (Long)

Nickel-plated brass, NBR



C	DN		G	L	L1	Kg
M12x1.25	2.5	0690 03 00	15	332	307	0.068



386 NI/min

82 dBA


21°

- Restricted access
- Progressive and powerful air jet

OSHA 1910.95 (b)
2003/10/EC directive:
Requirement to use ear protection
if exposure > 8 hours

0690 04 Safety Straight Nozzle (Short)

Nickel-plated brass, NBR



C	DN		G	L	L1	Kg
M12x1.25	2.5	0690 04 00	15	102	77	0.033



410 NI/min

82 dBA


21°

- Restricted access
- Air screen effect and directional jet
- Safety: avoids the nozzle becoming completely blocked

OSHA 1910.242 (b)/ OSHA 1910.95 (b)
2003/10/EC directive:
Requirement to use ear protection
if exposure > 8 hours

0690 05 Angled Nozzle (Long)

Nickel-plated brass, NBR



C	DN		G	L	L1	Kg
M12x1.25	2.5	0690 05 00	15	316	292	0.065



354 NI/min

82 dBA

21°

- Restricted or distant access
- Progressive and powerful air jet
- 360° rotation


OSHA 1910.95 (b)
2003/10/EC directive:
Requirement to use ear protection
if exposure > 8 hours

Nozzles for Polymer Blowguns


0690 06

Safety Angled Nozzle (Short)

Nickel-plated brass, NBR

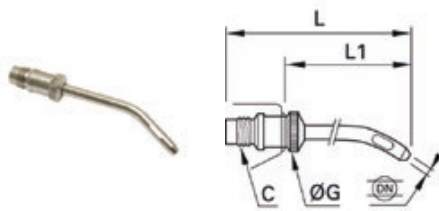

C	DN		G	L	L1	Kg
M12x1.25	2.5	0690 06 00	15	94	70	0.033



- Restricted access
- Air screen effect and 360° directional jet
- Safety: avoids the nozzle becoming completely blocked

350 Nl/min

86 dBA


21°

OSHA 1910.242 (b)/ OSHA 1910.95 (b)
2003/10/EC directive:
Requirement to use ear protection if
exposure > 8 hours


0690 06 01

Angle Nozzle (Short)

Nickel-plated brass, NBR

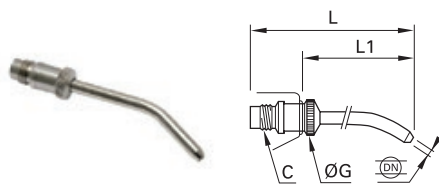

C	DN		G	L	L1	Kg
M12x1.25	2.5	0690 06 01	15	94	70	0.034



- Difficult access
- Progressive and powerful air jet, 360° rotation

524 Nl/min

86 dBA


21°

OSHA 1910.95 (b)
2003/10/EC directive:
Requirement to use ear protection if exposure
> 8 hours

0690 07

Nozzle with LF 3000® Push-In Connection

Nickel-plated brass, NBR

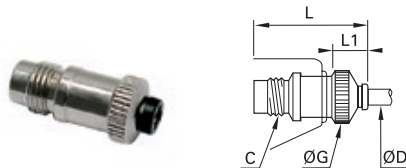

ØD	C		G	L	L1	Kg
4	M12x1.25	0690 07 00	15	35	13	0.024



- Restricted access
- Progressive air jet

340 Nl/min (with 2.7x4 tube)
200 Nl/min (with 2x4 tube)

86 dBA


21°

OSHA 1910.95 (b)
2003/10/EC directive:
Requirement to use ear protection
if exposure > 8 hours

0690 09

Air Screen Safety Nozzle

Nickel-plated brass

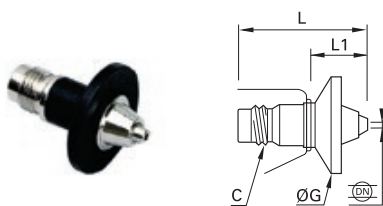

C	DN		G	L	L1	Kg
M12x1.25	2	0690 09 00	30	40.5	18.5	0.022

Deflector: technical polymer



- High flow for blowing large surfaces
- Air screen and deflector to avoid particles being blown back
- Safety: avoids the nozzle becoming completely blocked

660 Nl/min

86 dBA

24° nozzle
140° screen

OSHA 1910.242 (b)/ OSHA 1910.95 (b)
2003/10/EC directive:
Requirement to use ear protection if
exposure > 8 hours

0690 08

COANDA Nozzle

Nickel-plated brass



C		L	L1	Kg
M12x1.25	0690 08 00	47.5	26	0.033



- Directional air jet
- Very quiet, energy-saving
- Safety: avoids the nozzle becoming completely blocked

240 Nl/min

73 dBA


20°

OSHA 1910.242 (b)/ OSHA 1910.95 (b)
2003/10/EC directive:
No ear defenders necessary


Nozzles for Polymer Blowguns

0690 10 Safety Booster Nozzle

Nickel-plated brass



C	DN		G	L	L1	Kg
M12x1.25	2.5	0690 10 00	15	64	42	0.038



780 Nl/min

99 dBA


28°

OSHA 1910.242 (b)
2003/10/EC directive:
Requires ear defenders to be used at all times

- High flow for blowing large surfaces
- Air screen effect
- Safety: avoids the nozzle becoming completely blocked


0690 11 Safety Booster Nozzle with Air Screen

Nickel-plated brass



C	DN		G	G1	L	L1	Kg
M12x1.25	2.5	0690 11 00	30	15	76	54	0.046

Deflector: technical polymer



860 Nl/min

99 dBA

26° nozzle
140° screen

OSHA 1910.242 (b)
2003/10/EC directive:
Requires ear defenders to be used at all times

- Same advantage as the Booster nozzle
- Safety: avoids the nozzle becoming completely blocked
- Air screen and deflector avoid particles being blown back

Metal Blowguns and Water Pistols

This range of robust blowguns guarantees a **longer service life** under **severe conditions** (crushing, impact, shock and corrosion). It includes two versions **to meet all requirements** for blowing and spraying in industrial applications.

Product Advantages

- Workshop Blowgun

Compact for easy incorporation into compressed air ring mains
 Nickel-plated forged brass for increased corrosion resistance
- Water Pistol

Intended for the transmission of water and fluids
 Designed for precise flow control and optimisation of the power and shape of the jet
 Optimum use of industrial fluids
 Excellent ergonomics and service life




- Applications
- Manufacturing Workshops
 - Assembly Machines
 - Robotics
 - Ejection
 - Cooling
 - Packaging
 - Automotive Process

Technical Characteristics

Model	Metal Blowgun	Water Pistol
Compatible Fluids	Compressed air, industrial fluids	Water, oil, industrial fluids
Working Pressure	0 to 10 bar	0 to 20 bar
Working Temperature	Air: -15°C to +50°C Dry air: -20°C to +80°C	-20°C to +100°C
Tubes	Recoil tubes and hose	Braided hose with Parker Legris couplers

Component Materials

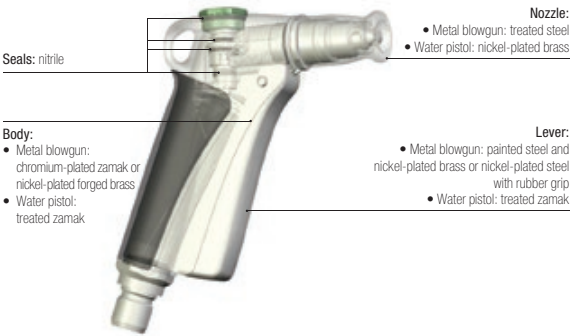

Silicone-free


Regulations

Compliance for all blowguns:
 DI: 97/23/EC (PED)
 DI: 2002/95/EC (RoHS), 2011/65/EC
 DI: 1907/2006 (REACH)

Metal Blowguns and Water Pistols

0623 Lever-Operated Blowgun, Female BSPP Thread

Nickel-plated brass, zinc-plated blister steel, NBR




C	DN		G	H min	H max	H1	L	L1	L2	Kg
G1/4	2	0623 10 35	18	19	37	21	64	28	60	0.119

This blowgun has a hardened steel nozzle.

0622 Button-Operated Blowgun, Female BSPP Thread

Nickel-plated brass, zinc-plated blister steel, NBR




C	DN		G	H	H1	L	L1	ØT	Kg
G1/4	2	0622 26 73	18	17.5	20.5	82	29	7	0.199

This blowgun has a hardened steel nozzle.

2299 Water Pistol

Zamak, nickel-plated brass, NBR



DN		H	L	Kg
12	2299 12 01	140	126	0.468

This pistol allows independent control of:

- the flow rate (trigger)
- type of jet (adjustable to a fine mist) by the adjustable nozzle




1440 Nl/min (air)
16.2 Nl/min (eau)



Adjustable

2299 Adjustable Nozzle

Nickel-plated brass, NBR



DN		L	Kg
12	2299 12 20	77.4	0.137

This nozzle allows adjustment of the spray.

Related Products

For optimum connection and usage of the pistol and adjustable nozzle, you will find a full range of quick-acting couplers, in the Midi and Maxi Series, in Chapter 8.

Midi P. 8-25



Maxi P. 8-29



Blowgun Kits

Ready for use, **simple** and **ergonomic**, the Parker Legris blowgun kit remains an essential item of equipment for any blowing or spraying operation in the industrial environment.

Product Advantages

Ready for Use

- Kit contents:
- one blowgun
 - a 4 metre recoil tube
 - one R1/4 threaded fitting, external diameter 8 mm

Easy to install and comfortable to use
Wide range of models and nozzles for optimum flow
Lower or upper connection
Labelling and colours can be customised
Packaging designed to facilitate self-service sales

Safety & Performance

Safe operation with the Safety or OSHA models
Durable, shock-resistant materials
100% leak and flow-tested in production
Date coding to guarantee quality and traceability
Minimum pressure drop
Optimisation of your energy consumption with the Energy-Saving model



Manufacturing Workshops
Cleaning
Blowing
Mixing
Ejection
Cooling
Packaging

Applications

Technical Characteristics

Compatible Fluids	Compressed air Other fluids: contact us
Working Pressure	0 to 10 bar
Working Temperature	Air: -15°C to +50°C Dry air: -20°C to +80°C
Tubes	Recoil tubing

Regulations

Compliance for all blowguns:
DI: 97/23/EC (PED)
DI: 2002/95/EC (RoHS), 2011/65/EC
DI: 1907/2006 (REACH)

Protection of design
All designs and models of Parker Legris blowguns have been registered with the following numbers: 13224 / 13225 / 13226.

Compliance for specific blowguns:
DI: 1910.242 (b) [OSHA]
The static pressure must be less than 30 psi in case the nozzle becomes blocked.
DI: 1910.95 (b) [OSHA]
The noise level must be less than 90 dBA over 8 hours' exposure.
DI: 2003/10/EC
Regulation relating to exposure to noise, particularly with regard to risks to hearing. The noise level must be less than 87 dBA.

Component Materials



Silicone-free

Customisation on request


- Marking
- Kit contents adaptable to your applications
- Additional functions
- Colour



Blowgun Kits

0631..09 Blowgun Kit, Lower Connection, Female BSPT Thread

Technical polymer, nickel-plated brass, treated aluminium, NBR




C		F	H	H1	L	Kg
R1/4	0631 00 09	16	192.5	139.5	152	0.441

Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0659 00 13).

0631..01 Safety Blowgun Kit, Lower Connection, Male BSPT Thread

Technical polymer, nickel-plated brass, NBR




C		F	H	H1	L	Kg
R1/4	0631 00 01	16	198.5	148.5	154	0.575

Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0654 00 13).

0631..30 Safety Blowgun, Lower Connection, Female BSPP Thread

Technical polymer, nickel-plated brass, NBR




C		F	H	H1	L	Kg
R1/4	0631 00 30	16	198.5	148.5	154	0.575

Nozzle: nickel-plated brass, NPT version available.

Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0654 01 13).

0631..23 Energy Saving Blowgun Kit with Angled Nozzle, Male BSPT Thread

Technical polymer, nickel-plated brass, NBR



C		F	H	H1	L	Kg
R1/4	0631 00 23	16	195	148.5	163	0.456


Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0653 66 13).

External diameter of tube 6 mm

Blowgun Kits

0631..03 Blowgun Kit, Lower Connection with Standard Nozzle, Male BSPT Thread

Technical polymer, nickel-plated brass, NBR




C		F	H	H1	L	Kg
R1/4	0631 00 03	16	165	148.5	99	0.528

Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0651 66 13).

0631..02 Blowgun Kit, Upper Connection with Standard Nozzle, Male BSPT Thread

Technical polymer, nickel-plated brass, NBR




C		F	H	H1	L	Kg
R1/4	0631 00 02	16	163	148.5	101	0.524

Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0658 66 13).

0631..04 Blowgun Kit, Upper Connection with Short Angled Nozzle, Male BSPT Thread

Technical polymer, nickel-plated brass, NBR




C		F	H	H1	L	Kg
R1/4	0631 00 04	16	195	148.5	163.5	0.536

Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0657 66 13).

0631..05 Blowgun Kit Lower Connection with Short Angled Nozzle, Male BSPT Thread

Technical polymer, nickel-plated brass, NBR




C		F	H	H1	L	Kg
R1/4	0631 00 05	16	195.5	148.5	163	0.536

Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0656 66 13).

Blowgun Kits

0631..07 Blowgun Kit, Lower Connection with Interchangeable Nozzle, Male BSPT Thread

Technical polymer, nickel-plated brass, NBR




C		F	H	H1	L	Kg
R1/4	0631 00 07	16	163	148.5	91	0.617

Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0656 66 13).
Delivered without nozzle.

0631..06 Blowgun Kit, Upper Connection with Interchangeable Nozzle, Male BSPT Thread

Technical polymer, nickel-plated brass, NBR




C		F	H	H1	L	Kg
R1/4	0631 00 06	16	161.5	148.5	93	0.501

Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0655 66 13).
Delivered without nozzle.

0631..08 Energy Saving Blowgun Kit, Lower Connection, Interchangeable Nozzle, Male BSPT Thread

Technical polymer, nickel-plated brass, NBR



C		F	H	H1	L	Kg
R1/4	0631 00 08	16	163	148.5	91	0.496

Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0653 66 13).
Delivered without nozzle.