



## Check Valves, Filters and Relief Valves

Catalog 4135-CV

December 2010

aerospace  
climate control  
electromechanical  
filtration  
fluid & gas handling  
hydraulics  
pneumatics  
process control  
sealing & shielding



ENGINEERING YOUR SUCCESS.

## Introduction

Parker FT Series Tee Filters are designed for protection of instrumentation systems from undesirable materials. Component changes or repair and maintenance can admit dirt, chips, or other contaminants to the small bore tubing.

## Features

- ▶ Filter element replacement achievable without removing filter from installation
- ▶ Compact, high strength forged body design with effective filtration areas of:
  - FT4 – 1.57 sq in (1013 sq mm)
  - FT8 – 2.53 sq in (1632 sq mm)
- ▶ Stainless steel and brass construction
- ▶ Standard sintered metal micron ratings: 1, 5, 10, 50, and 100
- ▶ Optional 250 and 450 micron wire cloth filter elements
- ▶ Optional bypass enables a continuous self cleaning flow around the element
- ▶ Port connections include male and female NPT, CPI™, A-LOK®, UltraSeal, and VacuSeal

## Specifications

### • Pressure Ratings:

With Elastomeric and Metallic Seals:

Stainless Steel .....6000 psig (414 bar) CWP

Brass.....2000 psig (138 bar) CWP

With PTFE Seals:

Stainless Steel .....4000 psig (276 bar) CWP

Brass.....2000 psig (138 bar) CWP

### Pressure Rating and Tubing Selection:

For working pressures of A-LOK® and CPI™ tube connections, please see the Instrument Tubing Selection Guide (Bulletin 4200-TS), found in the Technical Section of the Parker Instrumentation Process Control Binder, or the Parker Instrument Tube Fitting Installation Manual (Bulletin 4200-B4).

For working pressures of valves with external or internal pipe threads, please see Catalog 4260, Instrumentation Pipe Fittings.


## Definitions

**Filter Element** – The component within the filter which captures media contamination.

**Filtration Area** – The surface area of the filter element available to capture contamination.

**Micron** – A unit of measure used to indicate the mean pore diameter of the filter element or the mean particle diameter of media contamination.

*One micron* = 0.00004 inch or 0.0010 mm

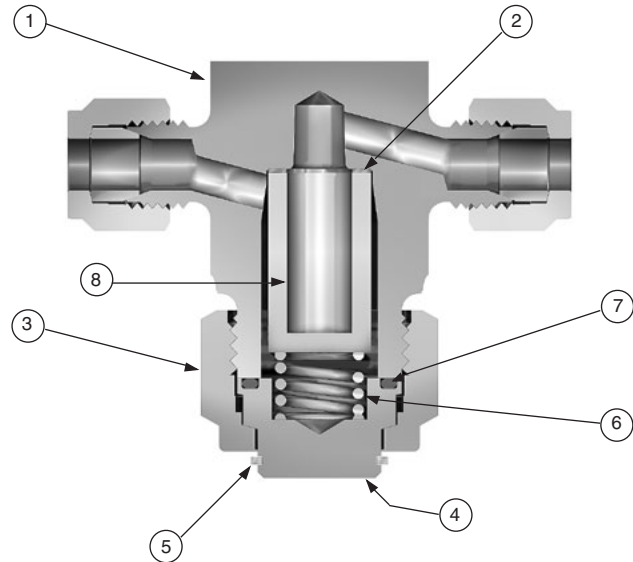

Model Shown: 4Z-FT4-10-BN-SS

## Materials of Construction

Item #	Part	Stainless Steel Filter	Brass Filter
1	Body	ASTM A182, Type F316	ASTM B283, Alloy C37700
2	Washer	316 Stainless Steel	
3	Nut	ASTM A479, Type 316	ASTM B16, Alloy C36000
4	Cap	ASTM A479, Type 316	ASTM B16, Alloy C36000
5	Retainer Ring	PH 15-7 Mo Stainless Steel	
6	Spring	316 Stainless Steel	
7	Seal	Fluorocarbon Rubber	
8	Element	316 Stainless Steel	


\* Optional seal materials are available. See How to Order section.  
Lubrication: Perfluorinated Polyether.

## Installation

Best installation practice is to orient the cap downward. This helps to prevent contaminants from entering the system during element change.

## Pressure vs. Temperature

### Nitrile Seat

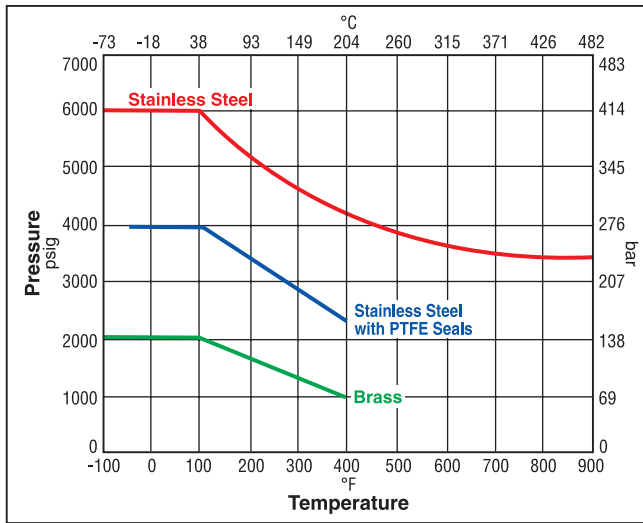

**Note:** This Pressure versus Temperature chart reflects the maximum temperature range of indicated body materials.

The temperature rating of the seal becomes the limiting factor on temperature range.

### Temperature Ratings:

- Nitrile Rubber..... -40°F to 275°F (-40°C to 135°C)
- Highly Fluorinated Fluorocarbon Rubber  
..... -20°F to 500°F (-29°C to 260°C)
- Ethylene Propylene Rubber  
..... -70°F to 300°F (-57°C to 149°C)
- Fluorocarbon Rubber..... -40°F to 400°F (-40°C to 204°C)
- Neoprene Rubber..... -65°F to 300°F (-54°C to 149°C)
- Silver Plated Nickel Alloy Gasket (C-ring)  
..... -100°F to 900°F (-73°C to 482°C)
- PTFE ..... -70°F to 400°F (-56°C to 204°C)

**Note:** To determine MPa, multiply bar by 0.1



## Flow Calculations with 100 psig (7 bar) Inlet Pressure

Pressure Drop		FT4				FT8			
ΔP psig	ΔP bar	Water gpm at 60°F (16°C)	Water m³/hr at 60°F (16°C)	Air SCFM at 60°F (16°C)	Air m³/hr at 60°F (16°C)	Water gpm at 60°F (16°C)	Water m³/hr at 60°F (16°C)	Air SCFM at 60°F (16°C)	Air m³/hr at 60°F (16°C)
		<b>1 Micron</b>				<b>1 Micron</b>			
5	0.35	0.16	0.04	1.69	2.68	0.28	0.06	2.89	4.58
10	0.69	0.23	0.05	2.35	3.72	0.39	0.09	4.02	6.36
50	3.45	0.51	0.12	4.63	7.18	0.87	0.20	7.91	12.26
		<b>5 Micron</b>				<b>5 Micron</b>			
5	0.35	0.35	0.08	3.68	5.84	0.77	0.17	8.05	12.76
10	0.69	0.50	0.11	5.13	8.12	1.08	0.25	11.21	17.74
50	3.45	1.11	0.25	10.10	15.65	2.43	0.55	22.07	34.19
		<b>10 Micron</b>				<b>10 Micron</b>			
5	0.35	0.44	0.10	4.57	7.26	0.94	0.21	9.90	15.70
10	0.69	0.62	0.14	6.37	10.09	1.33	0.30	13.79	21.83
50	3.45	1.38	0.31	12.55	19.44	2.98	0.68	27.15	42.07
		<b>50 Micron</b>				<b>50 Micron</b>			
5	0.35	0.52	0.12	5.42	8.59	0.99	0.23	10.42	16.52
10	0.69	0.73	0.17	7.55	11.95	1.40	0.32	14.51	22.97
50	3.45	1.63	0.37	14.86	23.03	3.14	0.71	28.57	44.26
		<b>100 Micron</b>				<b>100 Micron</b>			
5	0.35	0.65	0.15	6.78	10.75	1.64	0.37	17.22	27.31
10	0.69	0.91	0.21	9.45	14.95	2.32	0.53	23.99	37.97
50	3.45	2.04	0.46	18.60	28.81	5.19	1.18	47.23	73.17
		<b>250 Micron</b>				<b>250 Micron</b>			
5	0.35	1.14	0.26	11.94	18.92	1.74	0.40	18.22	28.88
10	0.69	1.62	0.37	16.56	26.17	2.47	0.56	25.28	39.95
50	3.45	3.61	0.82	31.30	48.07	5.52	1.25	47.78	73.37
		<b>450 Micron</b>				<b>450 Micron</b>			
5	0.35	1.23	0.28	12.84	20.35	1.88	0.43	19.64	31.13
10	0.69	1.74	0.39	17.82	28.17	2.66	0.60	27.27	43.10
50	3.45	3.88	0.88	33.92	52.16	5.94	1.35	51.89	79.81


## Flow / Filter Data

Filter Series	Effective Filtration Area		$C_V^*$						
			1 Micron	5 Micron	10 Micron	50 Micron	100 Micron	250 Micron	450 Micron
	sq in	sq mm	Micron Range .5 to 3	Micron Range 5 to 10	Micron Range 10 to 20	Micron Range 40 to 50	Micron Range 100 to 150	Micron Range 225 to 275	Micron Range 400 to 500
FT4	1.57	1012	0.072	0.157	0.195	0.231	0.289	0.511	0.549
FT8	2.53	1632	0.123	0.343	0.422	0.444	0.734	0.780	0.840

\* Tested in accordance with ISA S75.02. Gas flow will be choked when  $P_1 - P_2 / P_1 = x_T$ .  
 $x_T = 1.0$  for micron sizes 1 through 100; 0.78 for the 250 micron size, and 0.81 for the 450 micron size.



## Dimensions

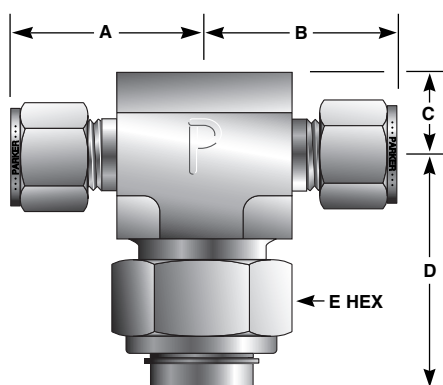

Model Shown: 4Z-FT4-10-BN-SS

Dimensions in inches (millimeters) are for reference only, subject to change.

Basic Part Number	End Connections		Dimensions Inches (mm)				
	Port 1	Port 2	A†	B†	C	D	E
2A-FT4	1/8" A-LOK®		1.14	1.14	0.51 (13.0)	1.53 (38.9)	0.88 (22.4)
2Z-FT4	1/8" CPI™		(29.0)	(29.0)			
2F-FT4	1/8" Female NPT		1.00	1.00			
2M-FT4	1/8" Male NPT		(25.4)	(25.4)			
4A-FT4	1/4" A-LOK®		1.00	1.00			
4Z-FT4	1/4" CPI™		(25.4)	(25.4)			
4F-FT4	1/4" Female NPT		1.06	1.06			
4M-FT4	1/4" Male NPT		(26.9)	(26.9)			
4Q-FT4	1/4" UltraSeal		1.09	1.09			
4V-FT4	1/4" VacuSeal		(27.7)	(27.7)			
M6A-FT4	6mm A-LOK®		1.20	1.20	0.59 (15.0)	1.71 (43.4)	1.25 (31.8)
M6Z-FT4	6mm CPI™		(30.5)	(30.5)			
6A-FT8	3/8" A-LOK®		1.23	1.23			
6Z-FT8	3/8" CPI™		(31.2)	(31.2)			
6M-FT8	3/8" Male NPT		1.19	1.19			
8A-FT8	1/2" A-LOK®		(30.2)	(30.2)			
8Z-FT8	1/2" CPI™		1.48	1.48			
8F-FT8	1/2" Female NPT		(37.6)	(37.6)			
8M-FT8	1/2" Male NPT		1.38	1.38			
8V-FT8	1/2" VacuSeal		(35.1)	(35.1)			
M8A-FT8	8mm A-LOK®		1.33	1.33	0.59 (15.0)	1.71 (43.4)	1.25 (31.8)
M8Z-FT8	8mm CPI™		(33.8)	(33.8)			
M10A-FT8	10mm A-LOK®		1.44	1.44			
M10Z-FT8	10mm CPI™		(36.6)	(36.6)			
M12A-FT8	12mm A-LOK®		1.44	1.44			
M12Z-FT8	12mm CPI™		(36.6)	(36.6)			

†For CPI™ and A-Lok®: Dimensions are measured with nuts in the finger tight position.

## Maximum Pressure Differential Across Clean Filters at 70°F (21°C)

	1 micron	5 micron	10 micron	50 micron	100 micron	250 micron	450 micron
psig	2250	1950	1750	1150	1000	1000	1000
bar	155	134	120	79	69	69	69

## How to Order

Dimensions in inches (millimeters) are for reference only, subject to change.

The correct part number is easily derived from the following example and ordering chart. The six product characteristics required are coded as shown in the chart.

The example below describes an FT Series Filter with 1/4" male NPT inlet and outlet ports, a 5 micron element, Nitrile seal and brass body construction.

**Example: 4M-FT4-5-BN-B**

4M				-	FT4				-	5				-	BN				-	B			
Inlet Port*				Outlet Port*				Valve Series				Micron Rating				Seal Material				Body Material			
Inlet Port*				Outlet Port*				Valve Series				Micron Rating				Seal Material				Body Material			
2A	4A	4Q	4Z	2A	4A	4Q	4Z	FT4				1 micron	Blank	Fluorocarbon Rubber				B	Brass				
2F	4F	4V	M6A	2F	4F	4V	M6A					5 micron	BN	Nitrile Rubber				SS	316				
2M	4M	4W	M6Z	2M	4M	4W	M6Z					10 micron	EPR	Ethylene Propylene Rubber									
2Z				2Z								50 micron	NE	Neoprene Rubber									
6A	8M	M8A	M10Z	6A	8M	M8A	M10Z	FT8				100 micron	KZ	Highly Fluorinated Fluorocarbon Rubber									
6M	8V	M8Z	M12A	6M	8V	M8Z	M12A					250 micron	HT	Silver Plated Nickel									
8A	8Z	M10A	M12Z	8A	8Z	M10A	M12Z					450 micron	T	PTFE									

\*If the inlet and outlet ports are the same, eliminate the outlet port designator.

## Options

**Oxygen Cleaning** – Add the suffix **-C3** to the end of the part number to receive filters cleaned and assembled for oxygen service in accordance with Parker specification ES8003. **Example:** 4A-FT4-10-V-SS-C3

**Bypass** – Add the suffix **-PB** to the end of the part number to receive a 1/8" -27 FNPT tapped Cap for sampling. **Example:** 2M-FT4-5-V-SS-PB

**Integral Compression Ported Bypass Option** – Add the suffix **-PBA** (A-LOK®) or **-PBZ** (CPI™) to the end of the part number to receive a 4Z/4A (FT4) or 6A/6Z (FT8) compression ported Cap. **Example:** 2M-FT4-5-V-SS-PBZ

## Kit Information

To order repair kits for the FT Series Filters, simply fill in the designators from the chart below.

Size	Micron Rating	Seal Material	
FT4	1 micron	V	Fluorocarbon Rubber
FT8	5 micron	BN	Nitrile Rubber
	10 micron	EPR	Ethylene Propylene Rubber
	50 micron	NE	Neoprene Rubber
	100 micron	KZ	Highly Fluorinated Fluorocarbon
	250 micron	HT	Silver PLated Nickel Alloy C-Ring
	450 micron		

**Examples:** KIT-FT4-10-V, KIT-FT8-100-BN

**Filter Kits Contain:** Seals, Filter Element, Spring and Maintenance Instructions.

**Caution:** When interchanging sintered metal elements with wire cloth filter elements, the flow direction is reversed.

