



HANLEY CONTROLS
CLONMEL




SL


The 10 and 11 Rectus Moldtite coupling series with Safe-Lock technology were especially developed for connecting coolant lines and injection moulds. These stand out for their convenient, single-handed operation and a reliable O-ring seal. Widely used in Europe.

- Available in:
 - single shut-off, double shut-off or straight-through versions
- The straight-through couplings are equipped with nickel plated sleeves for quick and accurate visual differentiation
- The angular connections prevent kinks from forming in the hose
- Available on request:
 - series 10/11 are also available with special FFKM high-temperature seal for applications up to constant temperature 200°C

Series 10



Series 11



KF Straight-Through

Working Pressure*:
up to 15 bar

Material:

- Coupling: Brass
- Plug: Brass, stainless steel
- Seals: FKM

Working Temperature:

-15°C up to +200°C (FKM)

Flow Rate Water:

- Series 10: 16 l/min.
- Series 11: 50 l/min.

pressure drop 0.5 bar

KA Single Shut-Off

Working Pressure*:
up to 15 bar

Material:

- Coupling: Brass
- Plug: Brass, stainless steel
- Seals: FKM

Working Temperature:

-15°C up to +200°C (FKM)

Flow Rate Water:

- Series 10: 8 l/min.
- Series 11: 20 l/min.

pressure drop 0.5 bar

KB Double Shut-Off

Working Pressure*:
up to 15 bar

Material:

- Coupling: Brass
- Plug: Brass
- Seals: FKM

Working Temperature:

-15°C up to +200°C (FKM)

Flow Rate Water:

- Series 10: 7 l/min.
- Series 11: 15 l/min.


pressure drop 0.5 bar

* maximum static working pressure with design factor 4 to 1.

→← Straight-Through

10/11KFA Coupler without valve, Male Thread, Safe-Lock

Brass, FKM

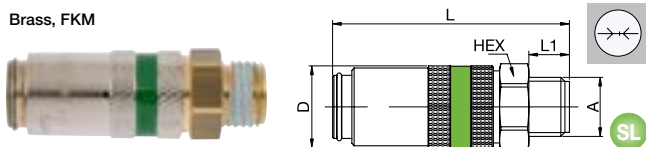


DN	Series	A	HEX	L	L1	D
6	10	G1/4	10KFAW13MVXSL	17	52.5	9 18
		M14 x 1.5	10KFAM14MVXSL	17	52.5	9 18
		G3/8	10KFAW17MVXSL	19	52.5	9 18
9	11	G1/4	11KFAW13MVXSL	22	62	9 24
		M16 x 1.5	11KFAM16MVXSL	22	62	9 24
		G3/8	11KFAW17MVXSL	22	62	9 24
		G1/2	11KFAW21MVXSL	22	65	12 24

→← Straight-Through

10/11KFTR Coupler without valve, Hose Barb 90°, Safe-Lock


Brass, FKM

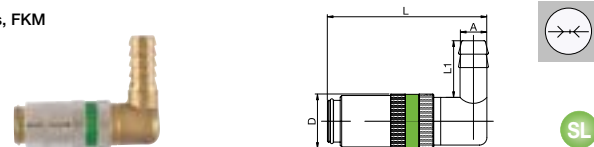

DN	Series	A	L	L1	D
6	10	9	10KFTR09MVXSL	53.5	22 18
9	11	13	11KFTR13MVXSL	63.5	28.5 24

10/11KFTF Coupler without valve, Hose Barb, Safe-Lock


Brass, FKM

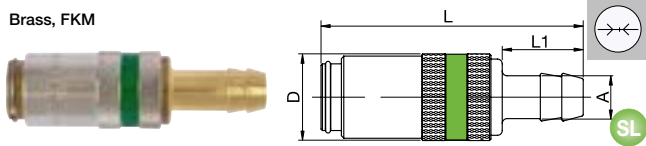


DN	Series	A	L	L1	D
6	10	9	10KFTF09MVXSL	60	22 18
9	11	13	11KFTF13MVXSL	71	25 24

10/11KFTH Coupler without valve, Hose Barb 45°, Safe-Lock

Brass, FKM

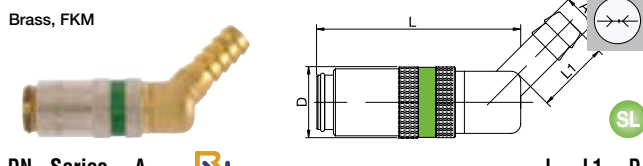


DN	Series	A	L	L1	D
6	10	9	10KFTH09MVXSL	60	22 18
9	11	13	11KFTH13MVXSL	60.5	25 24




10/11KBA Coupler with valve, Male Thread, Safe-Lock

Brass, FKM

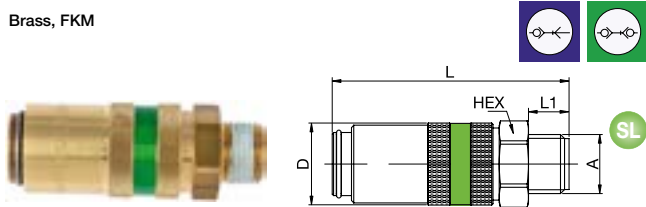


DN	Series	A		HEX	L	L1	D
6	10	G1/4	10KBAW13MVXSL	17	52.5	9	18
		M14 x 1.5	10KBAM14MVXSL	17	52.5	9	18
		G3/8	10KBAW17MVXSL	19	52.5	9	18
9	11	G1/4	11KBAW13MVXSL	22	62	9	24
		M16 x 1.5	11KBAM16MVXSL	22	62	9	24
		G3/8	11KBAW17MVXSL	22	62	9	24
		G1/2	11KBAW21MVXSL	22	65	12	24



10/11KBTR Coupler with valve, Hose Barb 90°, Safe-Lock


Brass, FKM

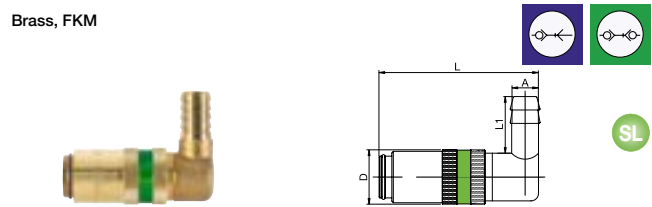

DN	Series	A		L	L1	D
6	10	9	10KBTR09MVXSL	53.5	22	18
9	11	13	11KBTR13MVXSL	63.5	28.5	24

10/11KBTF Coupler with valve, Hose Barb, Safe-Lock


Brass, FKM

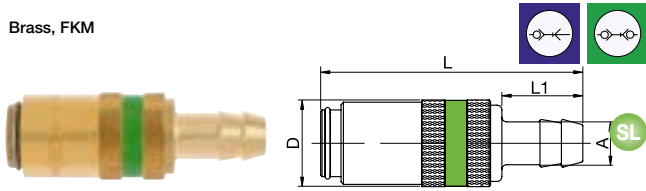

DN	Series	A		L	L1	D
6	10	9	10KBTF09MVXSL	60	22	18
9	11	13	11KBTF13MVXSL	71	25	24

10/11KBTH Coupler with valve, Hose Barb 45°, Safe-Lock

Brass, FKM

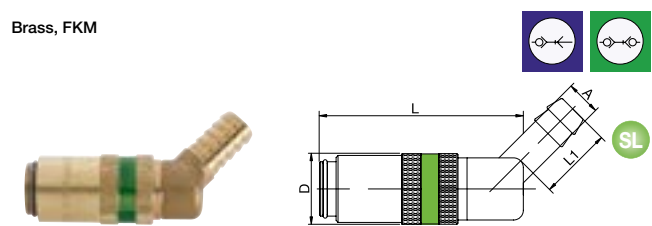

DN	Series	A		L	L1	D
6	10	9	10KBTH09MVXSL	60	22	18
9	11	13	11KBTH13MVXSL	60.5	25	24




HANLEY CONTROLS
CLONMEL



SV

The 10 and 11 Rectus Moldtite coupling series with Safety Lock were especially developed for connecting coolant lines and injection moulds. These stand out for their convenient, single-handed operation and a reliable O-ring seal. Widely used in Europe. Coupling system with safety locking. Accidental uncoupling is prevented effectively and easily with the automatic safety lock.

- Available in:
 - single shut-off, double shut-off or straight-through versions
- The straight-through couplings are equipped with nickel plated sleeves for quick and accurate visual differentiation
- The angular connections prevent kinks from forming in the hose
- Available on request:
 - series 10/11 are also available with special FFKM high-temperature seal for applications up to constant temperature 200°C



KF Straight-Through

Working Pressure*:
up to 15 bar

Material:

- Coupling: Brass
- Plug: Brass, stainless steel
- Seals: FKM

Working Temperature:
-15°C up to +200°C (FKM)

Flow Rate Water:

- Series 10: 16 l/min.
- Series 11: 50 l/min.

pressure drop 0.5 bar

KA Single Shut-Off

Working Pressure*:
up to 15 bar

Material:

- Coupling: Brass
- Plug: Brass, stainless steel
- Seals: FKM

Working Temperature:
-15°C up to +200°C (FKM)

Flow Rate Water:

- Series 10: 8 l/min.
- Series 11: 20 l/min.

pressure drop 0.5 bar

KB Double Shut-Off

Working Pressure*:
up to 15 bar

Material:

- Coupling: Brass
- Plug: Brass
- Seals: FKM

Working Temperature:
-15°C up to +200°C (FKM)

Flow Rate Water:

- Series 10: 7 l/min.
- Series 11: 15 l/min.


pressure drop 0.5 bar

* maximum static working pressure with design factor 4 to 1.

→|← Straight-Through

10/11KFA Coupler without valve, Male Thread

Brass, FKM

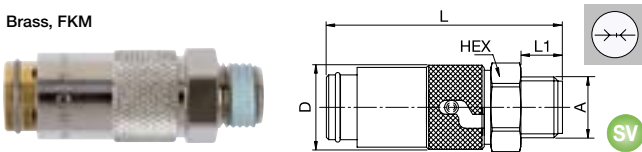


DN	Series	A		HEX	L	L1	D
6	10	G1/4	10KFAW13MVXSV	17	51	9	18
		M14 x 1.5	10KFAW14MVXSV	17	51	9	18
		G3/8	10KFAW17MVXSV	19	51	9	18
9	11	G1/4	11KFAW13MVXSV	22	59.5	9	23
		M16 x 1.5	11KFAW16MVXSV	22	59.5	9	23
		G3/8	11KFAW17MVXSV	22	59.5	9	23
		G1/2	11KFAW21MVXSV	22	62.5	12	23

→|← Straight-Through

10/11KFAR Coupler without valve, Male Thread 90°


Brass, FKM

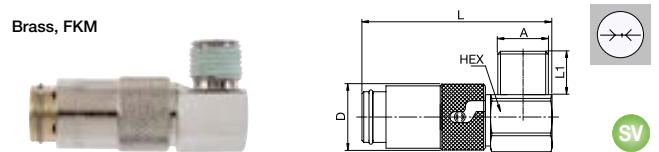

DN	Series	A		HEX	L	L1	D
6	10	G1/4	10KFAR13MVXSV	17	52.5	12	18
		M14 x 1.5	10KFAR14MVXSV	17	52.5	12	18
9	11	M16 x 1.5	11KFAR16MVXSV	22	61.5	12	23

10/11KFAH Coupler without valve, Male Thread 45°

Brass, FKM

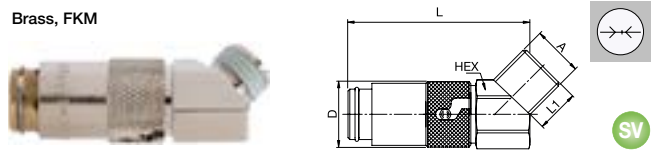


DN	Series	A		HEX	L	L1	D
6	10	G1/4	10KFAH13MVXSV	17	52.5	9	18
		M14 x 1.5	10KFAH14MVXSV	17	52.5	9	18
9	11	M16 x 1.5	11KFAH16MVXSV	22	61.5	9	23



Straight-Through

10/11KFTF Coupler without valve, Hose Barb


Brass, FKM

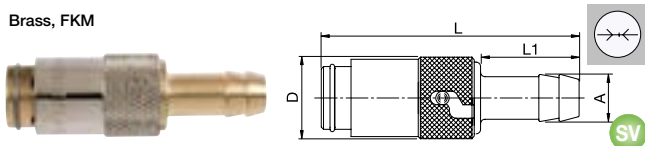

DN	Series	A		L	L1	D
6	10	9	10KFTF09MVXSV	57.5	22	18
9	11	13	11KFTF13MVXSV	68.5	25	23

10/11KFTR Coupler without valve, Hose Barb 90°


Brass, FKM

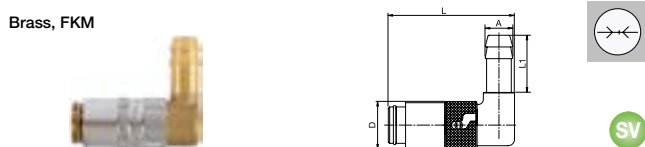


DN	Series	A		L	L1	D
6	10	9	10KFTR09MVXSV	48.5	22	18
9	11	13	11KFTR13MVXSV	56	28	23

10/11KFTH Coupler without valve, Hose Barb 45°

Brass, FKM

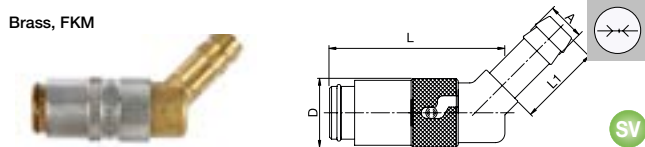


DN	Series	A		L	L1	D
6	10	9	10KFTH09MVXSV	46.5	22	18
9	11	13	11KFTH13MVXSV	56	28	23



Single Shut-off / Double Shut-off

10/11KBA Coupler with valve, Male Thread


Brass, FKM

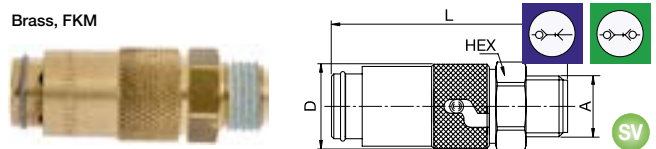

DN	Series	A		HEX	L	L1	D
6	10	G1/4	10KBAW13MVXSV	17	51	9	18
		M14 x 1.5	10KBAM14MVXSV	17	51	9	18
		G3/8	10KBAW17MVXSV	19	51	9	18
9	11	G1/4	11KBAW13MVXSV	22	59.5	9	23
		M16 x 1.5	11KBAM16MVXSV	22	59.5	9	23
		G3/8	11KBAW17MVXSV	22	59.5	9	23
		G1/2	11KBAW21MVXSV	22	62.5	12	23

10/11KBAR Coupler with valve, Male Thread 90°


Brass, FKM

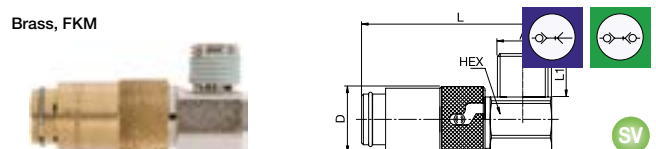

DN	Series	A		HEX	L	L1	D
6	10	G1/4	10KBAR13MVXSV	17	52.5	12	18
		M14 x 1.5	10KBAR14MVXSV	17	52.5	12	18
9	11	M16 x 1.5	11KBAR16MVXSV	22	61.5	12	23

10/11KBAH Coupler with valve, Male Thread 45°


Brass, FKM

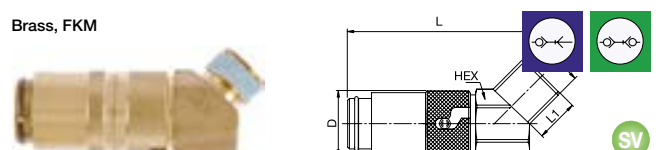

DN	Series	A		HEX	L	L1	D
6	10	G1/4	10KBAH13MVXSV	17	52.5	9	18
		M14 x 1.5	10KBAH14MVXSV	17	52.5	9	18
9	11	M16 x 1.5	11KBAH16MVXSV	22	61.5	9	23

10/11KBTF Coupler with valve, Hose Barb

Brass, FKM

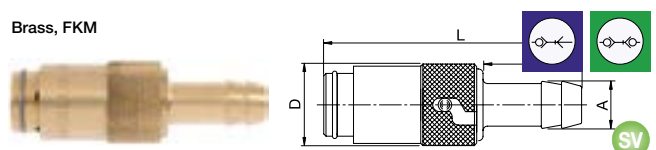

DN	Series	A		L	L1	D
6	10	9	10KBTF09MVXSV	57.5	22	18
9	11	13	11KBTF13MVXSV	68.5	25	23




Single Shut-off / Double Shut-off



10/11KBTR Coupler with valve, Hose Barb 90°

Brass, FKM




SV

DN	Series	A		L	L1	D
6	10	9	10KBTR09MVXSV	48.5	22	18
9	11	13	11KBTR13MVXSV	56	28	23

10/11KBTH Coupler with valve, Hose Barb 45°

Brass, FKM



SV

DN	Series	A		L	L1	D
6	10	9	10KBTH09MVXSV	46.5	22	18
9	11	13	11KBTH13MVXSV	56	28	23