



HANLEY CONTROLS
CLONMEL


Nominal Diameter
5.5 = 25 mm²



Robust industrial coupling according to ISO 6150 C. Coupling system with single-hand operation. High Flow valve for optimum flow and low pressure drop.

The steel sleeve counters oscillating forces. System has limited use for liquids (steel sleeve/zinc die cast valve). The high insertion depth guarantees by an optimised plug guidance.

- Available on request:
 - with additional end connections
 - other seals for different temperature ranges and fluids



ISO C Profile

Dust Protections (P. 357)
for Coupling Part.-No. SK23S

KA Single Shut-Off

Working Pressure*:
up to 35 bar

Material:

- Coupling: Nickel plated brass / steel
- Plug: Nickel plated steel
- Seals: NBR

Working Temperature:

-20°C up to +100°C (NBR)

Flow Rate Air:

970 l/min.


inlet pressure 6 bar, pressure drop 0.5 bar

Flow Rate Water:


12.7 l/min.

pressure drop 0.5 bar

* maximum static working pressure with design factor 4 to 1.




Single Shut-Off



Single Shut-Off

18KAAK Coupler with valve, Male Thread


Nickel-plated brass/steel, NBR

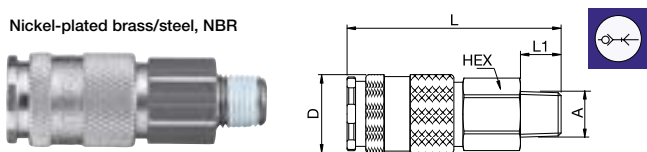

A	HEX	L	L1	D	
R1/4	18KAAK13MPN	19	63	12	23
R3/8	18KAAK17MPN	19	62	12	23
R1/2	18KAAK21MPN	22	63	17	23

18KATF Coupler with valve, Hose Barb


Nickel-plated brass/steel, NBR

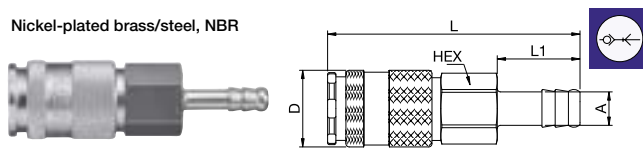

A	HEX	L	L1	D				
6	18KATF06MPN	9123	18	06	19	76	25	23
8	18KATF08MPN	9123	18	08	19	76	25	23
10	18KATF10MPN	9123	18	10	19	76	25	23
13	18KATF13MPN	9123	18	13	19	76	25	23

18KAIW Coupler with valve, Female Thread

Nickel-plated brass/steel, NBR

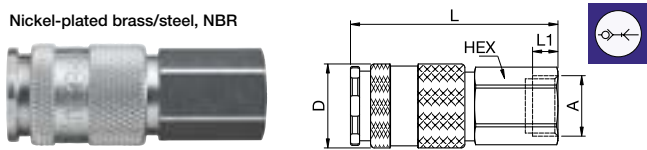



A	HEX	L	L1	D				
G1/4	18KAIW13MPN	9114	18	13	19	58	9	23
G3/8	18KAIW17MPN	9114	18	17	19	57	9	23
G1/2	18KAIW21MPN	9114	18	21	24	60	12	23

 Single Shut-Off

18SFAW Plug without valve, Male Thread


Nickel-plated steel





A			HEX	L	L1
G1/4	 18SFAW13SXN	 9087 18 13	17	41	9
G3/8	 18SFAW17SXN	 9087 18 17	19	41	9

18SFIW Plug without valve, Female Thread


Nickel-plated steel









A			HEX	L	L1
G1/4	 18SFIW13SXN	 9086 18 13	17	43	9
G3/8	 18SFIW17SXN	 9086 18 17	19	44	9

18SFTF Plug without valve, Hose Barb

Nickel-plated steel



A			L	L1	D
6	 18SFTF06SXN	 9085 18 06	59	25	12
8	 18SFTF08SXN	 9085 18 08	59	25	12
10	 18SFTF10SXN	 9085 18 10	59	25	12