




1/4" Industrial coupling with UltraFlo technology in accordance with ISO 6150 B and US Mil. Spec. 4109. Especially suitable for use with gaseous media in industry. Steel sleeve counters oscillating forces. Special variants with brass valve for use with liquids. High flow performance with low pressure drop and a multitude of connection options.

- Available on request:
 - with additional end connections
 - other seals for different temperature ranges and fluids



ISO B Profile



KA Single Shut-Off

Working Pressure*:
up to 35 bar

Material:


- Coupling: Nickel plated brass
- Plug: Nickel plated steel or brass
- Seals: NBR

Working Temperature:
-20°C up to +100°C (NBR)


Flow Rate Air:
960 l/min.
inlet pressure 6 bar, pressure drop 0.5 bar

Flow Rate Water:
14 l/min.
pressure drop 0.5 bar

* maximum static working pressure with design factor 4 to 1.




Single Shut-Off



Single Shut-Off

23KAA Coupler with valve, Male Thread


Nickel-plated brass, NBR

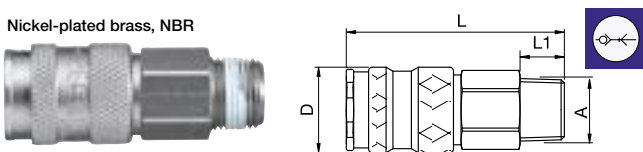

A		HEX	L	L1	D
R1/4	23KAAK13MPN	19	61	12	23
G1/4	23KAAW13MPN	9101 23 13	19	57	9 23
R3/8	23KAAK17MPN	19	60	12	23
G3/8	23KAAW17MPN	9101 23 17	19	57	9 23
R1/2	23KAAK21MPN	22	61	17	23

23KAIW Coupler with valve, Female Thread

Nickel-plated brass, NBR

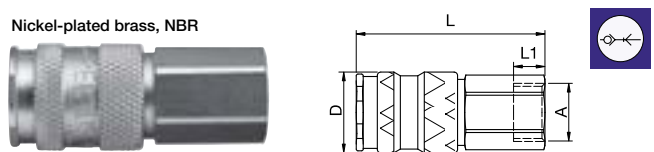


A		HEX	L	L1	D
G1/4	23KAIW13MPN	9114 23 13	19	56	9 23
G3/8	23KAIW17MPN	9114 23 17	19	54	9 23
G1/2	23KAIW21MPN	9114 23 21	24	58	9 23



23KATF Coupler with valve, Hose Barb

Nickel-plated brass, NBR

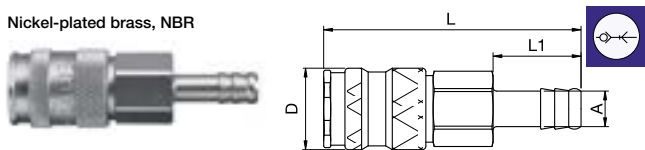




A			HEX	L	L1	D
6	23KATF06MPN	9123 23 06	19	74	25	23
8	23KATF08MPN	9123 23 08	19	74	25	23
9	23KATF09MPN		19	74	25	23
10	23KATF10MPN	9123 23 10	19	74	25	23
13	23KATF13MPN		19	74	25	23



23SFTF Plug without valve, Hose Barb

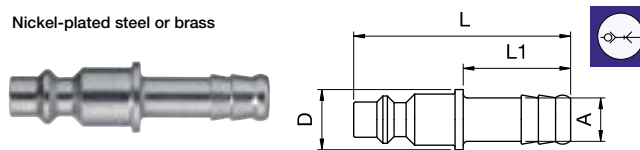
Nickel-plated steel or brass





A			L	L1	D	Version
6	23SFTF06SXN	9085 23 06	51	25	14	Nickel-plated steel
6	23SFTF06MXX		51	25	14	Brass
8	23SFTF08SXN	9085 23 08	51	25	14	Nickel-plated steel
9	23SFTF09SXN		51	25	14	Nickel-plated steel
9	23SFTF09MXX		51	25	14	Brass
10	23SFTF10SXN	9085 23 10	51	25	14	Nickel-plated steel
13	23SFTF13SXN		51	25	14	Nickel-plated steel

23SFA Plug without valve, Male Thread

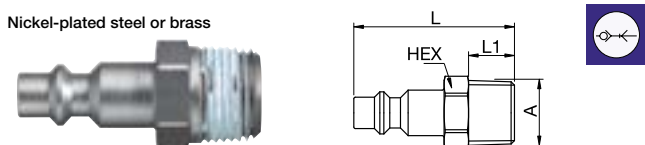
Nickel-plated steel or brass





A			HEX	L	L1	Version
R1/8	23SFAK10SXN		13	39	9	Nickel-plated steel
G1/8	23SAFW10SXN	9087 23 10	14	35	7	Nickel-plated steel
R1/4	23SFAK13SXN		14	42	12	Nickel-plated steel
G1/4	23SAFW13SXN	9087 23 13	14	42	12	Nickel-plated steel
G1/4	23SAFW13MXX		14	42	12	Brass
R3/8	23SFAK17SXN		17	42	12	Nickel-plated steel
G3/8	23SAFW17MXX		17	42	12	Brass
G3/8	23SAFW17SXN	9087 23 17	17	42	12	Nickel-plated steel
R1/2	23SFAK21SXN		22	48	17	Nickel-plated steel
G1/2	23SAFW21SXN	9087 23 21	22	42	12	Nickel-plated steel

23SFIW Plug without valve, Female Thread

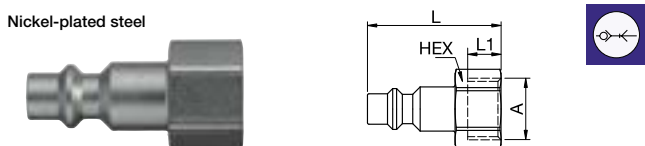Nickel-plated steel



A			HEX	L	L1
G1/8	23SFIW10SXN	9086 23 10	14	36	9
G1/4	23SFIW13SXN	9086 23 13	17	36	9
G3/8	23SFIW17SXN	9086 23 17	19	36	9
G1/2	23SFIW21SXN	9086 23 21	24	39	12