




Universal industrial coupling with standard European profile. Coupling system with single-hand operation. High Flow valve for optimum flow and low pressure drop. The series stands out for its robust design and long service life even with the harshest use.

- Available on request:
 - with additional end connections
 - other seals for different temperature ranges and fluids



Euro Profile



HANLEY CONTROLS

CLONMEL

Dust Protections (P. 357)
for Coupling Part.-No. SK23S
for Plug Part.-No. SK12S

KA Single Shut-Off

Working Pressure*:
up to 35 bar

Material:

- Coupling: Nickel plated brass / steel
- Plug: Zinc plated steel
- Seals: NBR

Working Temperature:

-20°C up to +100°C (NBR)

Flow Rate Air:

1.800 l/min.

inlet pressure 6 bar, pressure drop 0.5 bar

Flow Rate Water:

28 l/min.

pressure drop 0.5 bar

KB Double Shut-Off

Working Pressure*:
up to 35 bar

Material:

- Coupling: Nickel plated brass / steel
- Plug: Nickel plated brass
- Seals: NBR

Working Temperature:

-20°C up to +100°C (NBR)

Flow Rate Air:

710 l/min.


inlet pressure 6 bar, pressure drop 0.5 bar

Flow Rate Water:


7.1 l/min.

pressure drop 0.5 bar

* maximum static working pressure with design factor 4 to 1.




Single Shut-Off



Single Shut-Off

25KAA Coupler with valve, Male Thread


Nickel-plated brass/steel, NBR

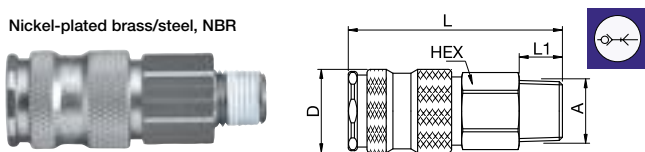


A		HEX	L	L1	D
R1/4	25KAAK13MPN	19	61	12	23
R3/8	25KAAK17MPN	19	60	12	23
R1/2	25KAAK21MPN	22	61	17	23
M14 x 1.5	25KAAD14MPN	19	59	10	23
M16 x 1.5	25KAAD16MPN	19	60	11	23
M18 x 1.5	25KAAD18MPN	19	60	11	23

25KAIW Coupler with valve, Female Thread

Nickel-plated brass/steel, NBR

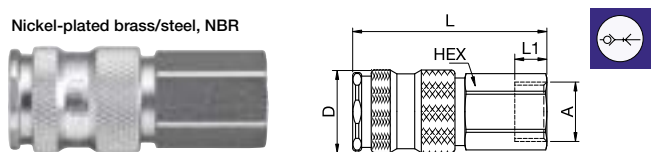


A		HEX	L	L1	D
G1/4	25KAIW13MPN	19	56	10	23
G3/8	25KAIW17MPN	19	55	9	23
G1/2	25KAIW21MPN	24	58	12	23



Single Shut-Off

25KAT Coupler with valve, Hose Barb


Nickel-plated brass/steel, NBR

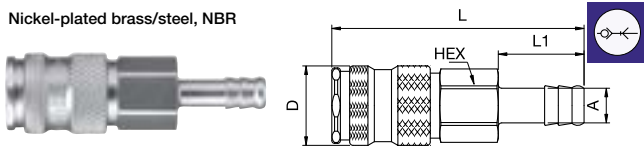

A		HEX	L	L1	D
6	25KATF06MPN	19	74	25	23
8	25KATF08MPN	19	74	25	23
9	25KATF09MPN	19	74	25	23
10	25KATF10MPN	19	74	25	23
13	25KATF13MPN	19	74	25	23
10 Push-Lok	25KATP10MPN	19	73	24	23
13 Push-Lok	25KATP13MPN	19	76	28	23

25KAKO Coupler with valve, with Plastic Hose Connection


Nickel-plated brass/steel, NBR

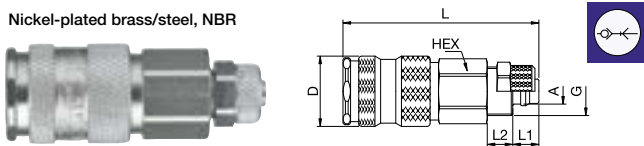

A		HEX	G	L	L1	L2	D
6 x 8	25KAKO08MPN	19	M12x1	61	7	6	23
8 x 10	25KAKO10MPN	19	M16x1	65	9	8	23
9 x 12	25KAKO12MPN	19	M16x1	65	9	8	23

25KATS Coupler with valve, Panel Mount with Hose Barb


Nickel-plated brass/steel, NBR

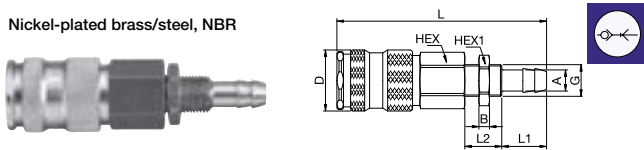


A		HEX	HEX1	B	G	L	L1	L2	D
8	25KATS08MPN	19	17	4	M12x1	80	17	14	23
10	25KATS10MPN	19	17	4	G1/4	87	25	14	23

25KAKK Coupler with valve, Plastic Hose Connection with Spring Guard

Nickel-plated brass/steel, NBR

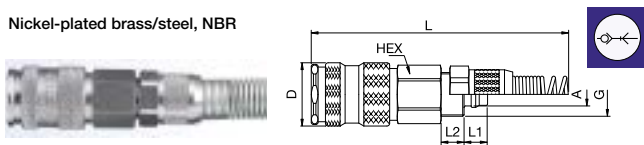


A		HEX	G	L	L1	L2	D
6 x 8	25KAKK08MPN	19	M12x1	144	7	6	23
8 x 10	25KAKK10MPN	19	M16x1	155	9	8	23
9 x 12	25KAKK12MPN	19	M16x1	162	9	8	23



Single Shut-Off

25SFA Plug without valve, Male Thread


Zinc-plated steel

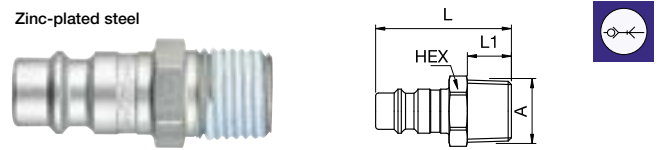

A		HEX	L	L1	
R1/8	25SFAK10SXZ	13	33	9	
G1/8	25SFAW10SXZ	9087 25 10	13	31	6.5
R1/4	25SFAK13SXZ	14	37	12	
G1/4	25SFAW13SXZ	9087 25 13	17	33	8
R3/8	25SFAK17SXZ	17	37	12	
G3/8	25SFAW17SXZ	9087 25 17	19	34	9
R1/2	25SFAK21SXZ	22	43	17	
G1/2	25SFAW21SXZ	9087 25 21	24	38	10.5

25SFIW Plug without valve, Female Thread


Zinc-plated steel

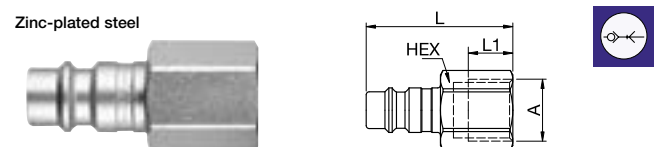


A		HEX	L	L1	
G1/8	25SFIW10SXZ	9086 25 10	14	30	5
G1/4	25SFIW13SXZ	9086 25 13	17	38.5	12
G3/8	25SFIW17SXZ	9086 25 17	19	39.5	12
G1/2	25SFIW21SXZ	9086 25 21	24	44	14

25FAAK Plug without valve, Flex Joint, Male Thread

Nickel-plated steel, NBR

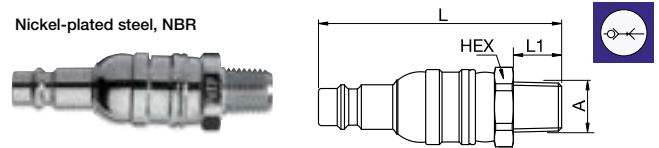


A		HEX	L	L1
R1/4	25FAAK13SPN	17	64	11




Single Shut-Off

25SFTF Plug without valve, Hose Barb

Zinc-plated steel

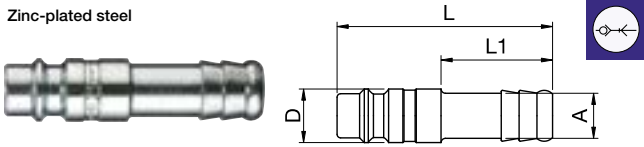


A			L	L1	D
6	25SFTF06SXZ	9085 25 06	48	25	12
8	25SFTF08SXZ	9085 25 08	48	25	12
9	25SFTF09SXZ	9085 25 09	48	25	12
10	25SFTF10SXZ	9085 25 10	48	25	12
13	25SFTF13SXZ	9085 25 13	48	25	15



Double Shut-off

25KBA Coupler with valve, Male Thread


Nickel-plated brass/steel or nickel-plated brass, NBR

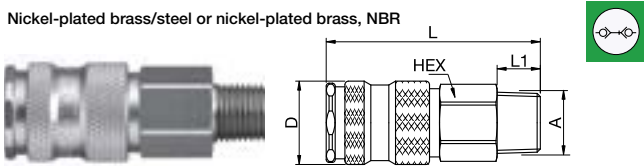

A			HEX	L	L1	D	Version
R1/4	25KBAK13BPN		19	61	12	23	Nickel-plated brass
G1/4	25KBAW13MPN	9201 25 13	19	60	9	23	Nickel-plated brass/steel
R3/8	25KBAK17BPN		19	60	12	23	Nickel-plated brass
G3/8	25KBAW17MPN	9201 25 17	19	58	9	23	Nickel-plated brass/steel
R1/2	25KBAK21BPN		22	61	17	23	Nickel-plated brass
G1/2	25KBAW21MPN	9201 25 21	24	61	12	23	Nickel-plated brass/steel
M14x1.5	25KBAD14BPN		19	59	10	23	Nickel-plated brass
M16x1.5	25KBAD16BPN		19	60	11	23	Nickel-plated brass
M18x1.5	25KBAD18BPN		19	60	11	23	Nickel-plated brass

25KBIW Coupler with valve, Female Thread

Nickel-plated brass/steel or nickel-plated brass, NBR

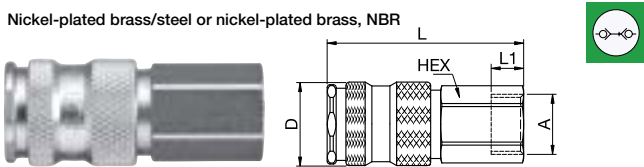


A			HEX	L	L1	D	Version
G1/4	25KBIW13BPN		19	56	10	23	Nickel-plated brass
G1/4	25KBIW13MPN	9214 25 13	19	56	10	23	Nickel-plated brass/steel
G3/8	25KBIW17BPN		19	55	9	23	Nickel-plated brass
G3/8	25KBIW17MPN	9214 25 17	19	55	9	23	Nickel-plated brass/steel
G1/2	25KBIW21BPN		24	58	12	23	Nickel-plated brass
G1/2	25KBIW21MPN	9214 25 21	24	58	12	23	Nickel-plated brass/steel



Double Shut-off

25KBT Coupler with valve, Hose Barb


Nickel-plated brass/steel or nickel-plated brass, NBR

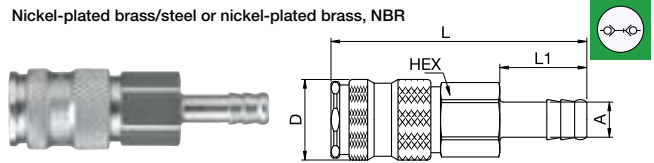

A			HEX	L	L1	D	Version
6	25KBT06BPN		19	74	25	23	Nickel-plated brass
6	25KBT06MPN	9223 25 06	19	74	25	23	Nickel-plated brass/steel
8	25KBT08BPN		19	74	25	23	Nickel-plated brass
8	25KBT08MPN	9223 25 08	19	74	25	23	Nickel-plated brass/steel
9	25KBT09BPN		19	74	25	23	Nickel-plated brass
9	25KBT09MPN		19	74	25	23	Nickel-plated brass/steel
10	25KBT10BPN		19	74	25	23	Nickel-plated brass
10	25KBT10MPN	9223 25 10	19	74	25	23	Nickel-plated brass/steel
13	25KBT13BPN		19	74	25	23	Nickel-plated brass
13	25KBT13MPN	9223 25 13	19	74	25	23	Nickel-plated brass/steel
10	25KBTP10BPN		19	73	24	23	Nickel-plated brass
13	25KBTP13BPN		19	76	28	23	Nickel-plated brass

25KBKO Coupler with valve, with Plastic Hose Connection


Nickel-plated brass, NBR

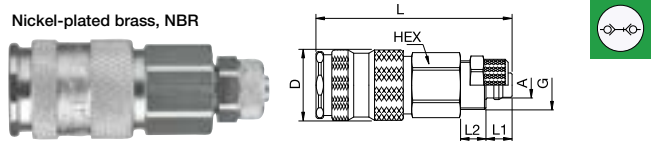


A			HEX	G	L	L1	L2	D
6 x 8	25KBK008BPN		19	M12x1	61	7	6	23
8 x 10	25KBK010BPN		19	M16x1	65	9	8	23
9 x 12	25KBK012BPN		19	M16x1	65	9	8	23

25KBTS Coupler with valve, Panel Mount with Hose Barb

Nickel-plated brass, NBR

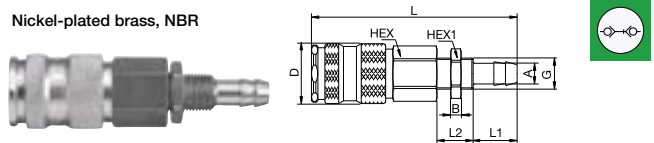


A			HEX	HEX1	B	G	L	L1	L2	D
8	25KBTS08BPN		19	17	4	M12x1	80	17	14	23
10	25KBTS10BPN		19	17	4	M12x1	76	17	10	23



Double Shut-off

25KBKK Coupler with valve, Plastic Hose Connection with Spring Guard


Nickel-plated brass, NBR

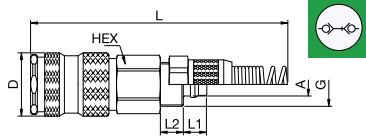

A		HEX	G	L	L1	L2	D
6 x 8	25KBKK08BPN	19	M12x1	144	7	6	23
8 x 10	25KBKK10BPN	19	M16x1	142	7	6	23
9 x 12	25KBKK12BPN	19	M16x1	162	9	8	23

25SBA Plug with valve, Male Thread


Nickel-plated brass, NBR




A		HEX	L	L1
G1/8	25SBAW10MPN	22	44.5	9
G1/4	25SBAW13MPN	22	43	9
G3/8	25SBAW17MPN	22	43	9
G1/2	25SBAW21MPN	22	46	12
M14 x 1.5	25SBAD14MPN	22	44	10
M16 x 1.5	25SBAD16MPN	22	45	11
M18 x 1.5	25SBAD18MPN	22	45	11

25SBIW Plug with valve, Female Thread

Nickel-plated brass, NBR




A		HEX	L	L1
G1/4	25SBIW13MPN	22	43	10
G3/8	25SBIW17MPN	22	43	9
G1/2	25SBIW21MPN	24	46	12



Double Shut-off

25SBT Plug with valve, Hose Barb


Nickel-plated brass, NBR



A		HEX	L	L1
6	25SBTF06MPN	21	60	25
8	25SBTF08MPN	21	60	25
9	25SBTF09MPN	21	60	25
10	25SBTF10MPN	21	60	25
13	25SBTF13MPN	21	60	25
10	25SBTP10MPN	19	71	24
13	25SBTP13MPN	19	83	28

25SBK0 Plug with valve, with Plastic Hose Connection


Nickel-plated brass, NBR



A		HEX	G	L	L1	L2
4 x 6	25SBK006MPN	21	M10x1	47	7	6
6 x 8	25SBK008MPN	21	M12x1	47	7	6
8 x 10	25SBK010MPN	21	M16x1	51	8.5	8.5
9 x 12	25SBK012MPN	21	M16x1	51	8.5	8.5

25SBTS Plug with valve, Panel Mount with Hose Barb


Nickel-plated brass, NBR



A		HEX	HEX1	B	G	L	L1	L2
8	25SBTS08MPN	21	17	4	M12x1	65	17	14
10	25SBTS10MPN	21	17	3.5	G1/4	74	25	14

25SBKK Plug with valve, Plastic Hose Connection with Spring Guard

Nickel-plated brass, NBR



A		HEX	G	L	L1	L2
4 x 6	25SBKK06MPN	19	M10x1	120	7	6
6 x 8	25SBKK08MPN	19	M12x1	135	7	6
8 x 10	25SBKK10MPN	19	M16x1	145	8.5	8.5
9 x 12	25SBKK12MPN	19	M16x1	150	8.5	8.5