Dwyer

HANLEY CONTROLS
CLONMEL
www.hccl.ie

SERIES 626 & 628 | INDUSTRIAL PRESSURE TRANSMITTER/TRANSDUCER

626/628 pressure transmitters with general purpose housing (-GH)

626/628 pressure transmitters with conduit box housing (-CB) and LCD display

FEATURES/BENEFITS

Standard:
- **NEMA 4X rated enclosure**
- **Robust 316L SS oil filled sensor**
- **CE approved design**
- **626: 0.25% FS**
- **628: 1.0% FS**

Optional:
- **Advanced environmental protection**
- **C-276 wetted materials**
- **Digital or analog outputs (I2C)**
- **Custom range configuration**
- **Overpressure and/or vacuum protection**

APPLICATIONS

- Booster stations
- Pumping systems
- Irrigation equipment
- PTO systems
- Submersible pump control

DESCRIPTION

The **Series 626 & 628 Pressure Transmitters** feature a piezo-resistive sensor contained in a compact, rugged, NEMA 4X (IP66) stainless steel general purpose housing or cast aluminum conduit housing.

Dwyer offers optional configurations to address multiple common points of failure that have traditionally challenged the use of similar products in extreme conditions. The 626 & 628 are uniquely suited for precision irrigation and additional outdoor power equipment applications. The corrosion resistant 316L stainless steel wetted parts allow the Series 626 & 628 transmitters to measure pressure in a multitude of processes from simple irrigation systems to chemical dosing and injection systems. Optional wetted materials such as C-276 offer chemical compatibility with aggressive media. The 626 & 628 can be configured to provide advanced environmental protection. This includes, but is not limited to, freeze/thaw protection for outdoor cold weather applications, vibration resistance, and/or overpressure protection to protect the sensors against pressure surges or pump cavitation. The Series 626 & 628 are available in absolute and gauge pressure ranges with a variety of optional outputs, process connections, electrical terminations, and select agency approvals to allow you to select the correct transmitter for your application.

Contact Dwyer Instruments today to discuss your specific application needs.

SPECIFICATIONS

Service	Compatible gases and liquids.
Wetted Materials	Type 316L SS. (Consult factory for additional options)
Accuracy	626: 0.25% FS, 0.20% RSS; 628: 1.0% FS, 0.5% RSS; 626 absolute ranges: 0.5% FS, 0.30% RSS. (Includes linearity, hysteresis, and repeatability).
Temperature Limit	0 to 200°F (-18 to 93°C).
Compensated Temperature Range	0 to 175°F (-18 to 79°C).
Thermal Effect	±0.2% FS/°F (includes zero and span).
Pressure Limits	See table on catalog page.
Display	Optional 4-1/2 digit LCD field attachable display. For -CB option.
Power Requirement	10-30 VDC (for 4-20 mA, 0-5, 1-5, VDC outputs); 13-30 VDC (for 0-10 VDC output); 5 VDC ±0.5 VDC (for 0.5-4.5 VDC ratiometric output), 10-35 VDC (for 4-20 mA with -CB option); 13-35 VDC or isolated 16-33 VAC (for selectoable output with -CB option).
Output Signal	4-20 mA, 0-5 VDC, 1-5 VDC, 0-10 VDC, or 0.5-4.5 VDC, or selectable 0-5, 1-5, 0-10, 2-10 VDC for -CB option.
Response Time	300 ms.
Loop Resistance	0 to 1000 Ω max. R max = 50 (Vps-10) Ω (4-20 mA output), 0 to 1250 Ω max. Rmax = 50(Vps-10) Ω (4 to 20 mA output with -CB option), 5K Ω (0-5, 1-5, 0-10, 0.5-4.5 VDC output).
Stability	1.0% FS/year (typ).
Current Consumption	38 mA maximum (for 4-20 mA output); 10 mA maximum (for 0-5, 1-5, 0-10, 0.5-4.5 VDC output); 140 mA maximum (for all 626/628/629-CH with optional LED).
Electrical Connections	See model chart.
Process Connections	See model chart.
Enclosure Rating	NEMA 4X (IP66).
Weight	10 oz (283 g).
Agency Approvals	Standard: CE; Optional: NSF/ANSI 61/372, ANSI/UL 218, ANSI/UL 508, NEPA 20.

HANLEY CONTROLS
CLONMEL

www.hccl.ie

DIMENSIONS

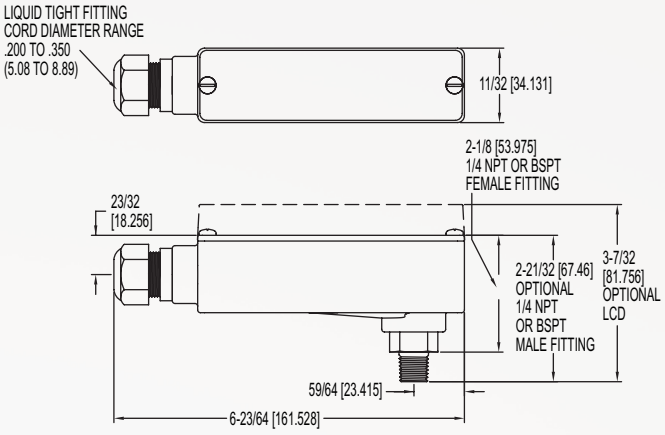

Conduit housing

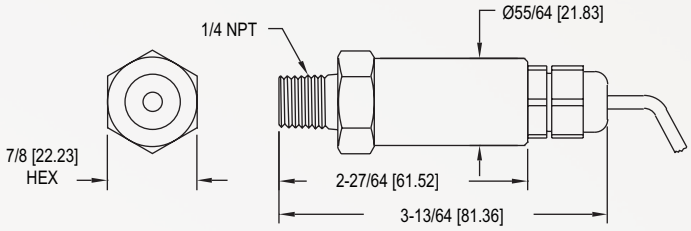

General purpose housing

HANLEY CONTROLS
CLONMEL

www.hccl.ie

HOW TO ORDER

Use the **bold** characters from the chart below to construct a product code.

626 **-05** **-GH** **-P3** **-E1** **-S1** **-NIST**

SERIES
626: 0.25% full scale accuracy
628: 1.0% full scale accuracy

RANGE
-00: 0 to 15 psia*
-01: 0 to 30 psia*
-02: 0 to 50 psia*
-03: 0 to 100 psia*
-04: 0 to 200 psia*
-05: 0 to 300 psia*
-06: 0 to 5 psi
-07: 0 to 15 psi
-08: 0 to 30 psi
-09: 0 to 50 psi
-10: 0 to 100 psi
-11: 0 to 150 psi
-12: 0 to 200 psi
-13: 0 to 300 psi
-14: 0 to 500 psi
-22: 0 to 600 psi
-15: 0 to 1000 psi
-16: 0 to 1500 psi
-18: 0 to 3000 psi
-19: 0 to 5000 psi
-26: 0 to 8000 psi
-67: 0 to 0.5 bar*
-71: 0 to 2.5 bar*
-75: 0 to 10 bar*
-81: 0 to 40 bar*

*Only available on -GH housing models

HOUSING
-CB: Conduit box housing
-GH: General purpose housing

OPTIONS
-AT: Aluminum tag
-LED: Bright red LED display
-NIST: NIST traceable calibration certificate
-NW: NSF/ANSI 61/372 certified

SIGNAL OUTPUT
-S1: 4-20 mA
-S2: 1-5 VDC
-S4: 0-5 VDC
-S5: 0-10 VDC
-S7: 0.5-4.5 VDC
-S8: 0-5, 1-5, 0-10, 2-10 VDC

ELECTRICAL CONNECTIONS
-E1: Cable gland with 3´ of prewired cable
-E3: Cable gland with 9´ of prewired cable
-E4: DIN EN 175801-803-C
-E5: 1/2″ female NPT conduit
-E6: M-12 4-pin connector UL listed
-E8: Packard connector
-E9: M-12 4-pin connector non-UL listed

PROCESS CONNECTIONS
-P1: 1/4″ male NPT
-P2: 1/4″ female NPT
-P3: 1/4″ male BSPT
-P5: 1/4″ female SAE with refrigerant valve depressor
-P9: 1/2″ male NPT

ACCESSORIES

Model	Description
A-164	16.4´ (5 m) cable with M-12 4-pin female connector
A-62X-LCD	Field-upgradeable LCD
A-960	3´ (1 m) Packard cable
A-961	9´ (3 m) Packard cable
A-962	20´ (7 m) Packard cable

HANLEY CONTROLS
CLONMEL
www.hccl.ie

ORDER ONLINE TODAY!
dwyer-inst.com/Product/Series626-628

DWYER INSTRUMENTS, INC.

©Copyright 2020 Dwyer Instruments, Inc.
Printed in U.S.A. 3/20

DS-626-628 Rev. 7

Important Notice: Dwyer Instruments, Inc. reserves the right to make changes to or discontinue any product or service identified in this publication without notice. Dwyer advises its customers to obtain the latest version of the relevant information to verify, before placing any orders, that the information being relied upon is current.