

# AVR4 Series

Electrically Heated, Vaporizing Pressure Regulator  
 Pressure Reducing, Stainless Steel



## Value Proposition:

The AVR4 Series regulator is designed to heat and/or vaporize a gas or liquid sample before entering an analyzer system.

This unique design allows the user to disassemble the regulator and heat transfer components for complete cleaning and repair of the unit, thus reducing expensive replacement costs and down time.



## Contact Information:

Parker Hannifin Corporation  
**Veriflo Division**  
 250 Canal Blvd  
 Richmond, California 94804

phone 510 235 9590  
 fax 510 232 7396  
 veriflo.sales@parker.com

www.parker.com/veriflo  
 Mobile App: m.parker.com/veriflo



## Product Features:

- Ultra low internal volume
- CSA, CE-ATEX certified
- Cleaned for O<sub>2</sub> service is standard
- Convoluted Hastelloy C-22® diaphragm for superior strength and corrosion resistance provides outlet pressure stability with changes in flow
- Field serviceable heat transfer element
- TCO (Thermal cut-out) is standard for all heat ranges
- Integral diaphragm stop provides additional measure of safety
- Express Service Program available noted *green italic print*




# AVR4 Series

## Flow Curves

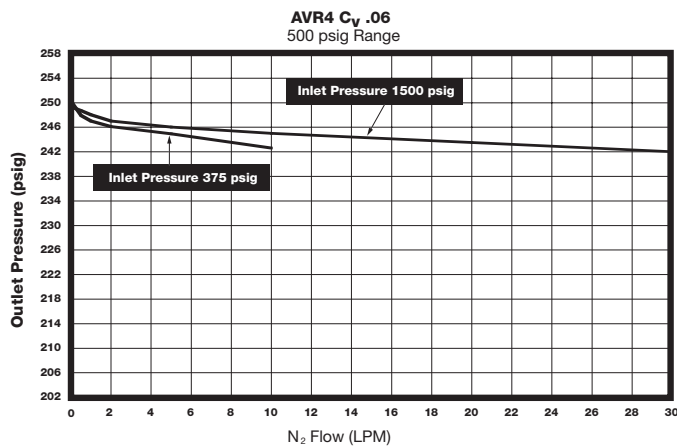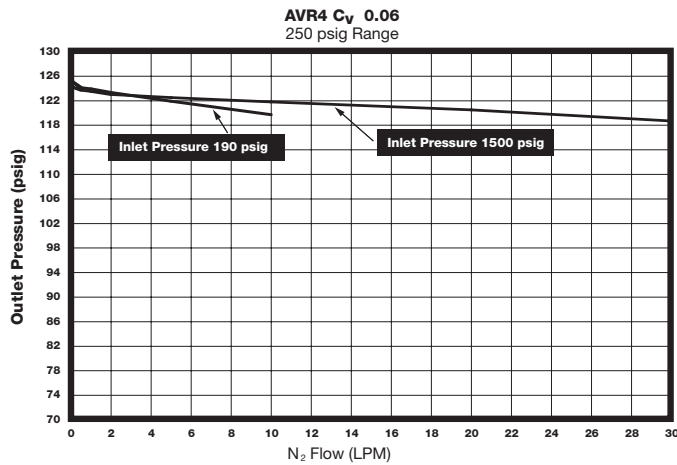


## Porting Configurations

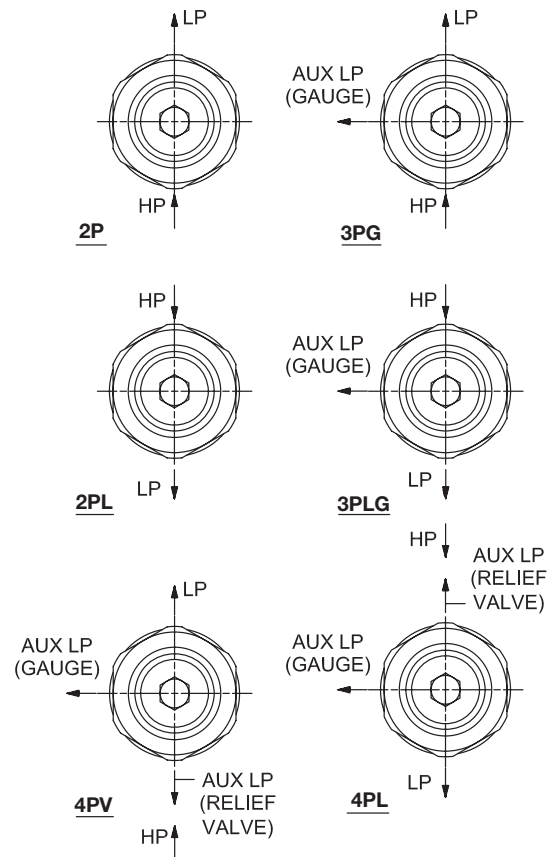

ATEX Related Drawing:  
Revision Control Per 54099313  
Reference: ATEX Schedule Drawing 54013150  
Reference: CSA File # LR99181

## Dimensional Drawing

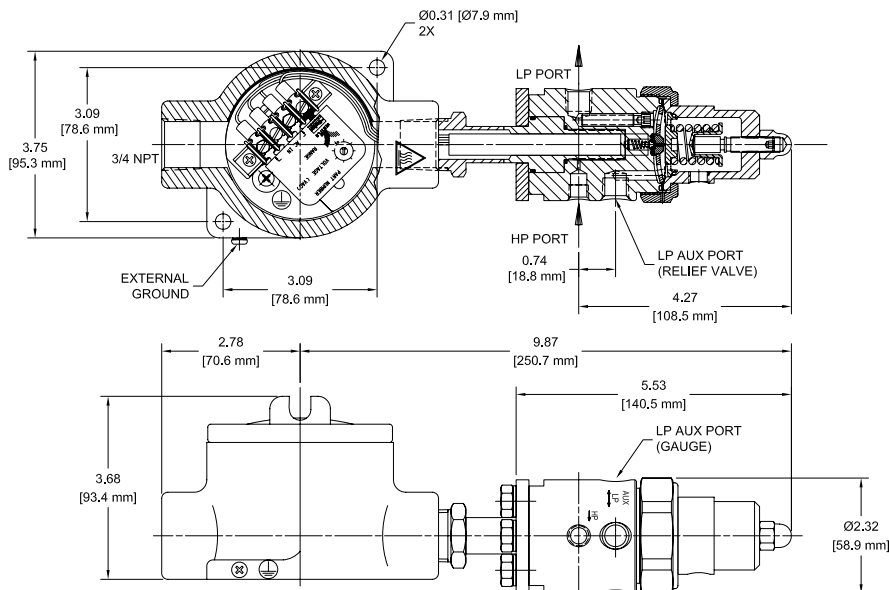

Safety Guide and Installation and Operating Instructions available at  
[www.parker.com/veriflo](http://www.parker.com/veriflo)

# AVR4 Series


## Ordering Information


Build an AVR4 Series regulator by replacing the numbered symbols with an option from the corresponding tables below.


**Color Explanations:** Black = Standard Lead Time Configurations  
 Blue = Extended Lead Time Configurations  
 Green *Italic* = Express Service Program (ESP)


For an explanation of Ordering options please reference literature 25000275 at [www.parker.com/veriflo](http://www.parker.com/veriflo)


Sample: **AVR4**  **S**  **K**  **1**  **120**  **D**  **L**  **X**  **3PG**  **RV**  
 Finished Order: **AVR4SK1120DLX3PGRV**

 **Body Material**  
*S = 316L Stainless Steel*  
*H = Hastelloy C-22®*  
*M = Monel®*


 **Seat Material**  
*K = PCTFE*  
*P = PEEK™*  
*V = VespeI®*


 **Pressure Range**  
 0 = 0 - 10 psig (max inlet 250 psig)  
*1 = 1 - 30 psig*  
*2 = 2 - 60 psig*  
*3 = 3 - 100 psig*  
 4 = 10 - 250 psig  
 5 = 20 - 500 psig

 **Voltage**  
*120 = 120V*  
*240 = 240V*

 **Heater Wattage**  
 A = 40  
 C = 100  
*D = 150*  
*E = 200*

 **Temperature Controller**  
*L = 75°F to 220°F 24°C - 104°C*  
*H = 220°F to 380°F 104°C - 193°C*




 **Outlet Gauge**  
*03 = 0 - 30 psig*  
*0L = 0 - 60 psig*  
*01 = 0 - 100 psig*  
 4 = 0 - 400 psig  
 6 = 0 - 600 psig  
*X = No Gauge*

 **Porting Configuration**  
*blank = 2 Port*  
*2PL = 2 Port Reverse Entry*  
*3PG = 3 Port Relief Valve or Gauge Port*  
*3PLG = 3 Port Reverse Entry Relief Valve or Gauge Port*  
*4PV = 4 Port Relief Valve and Gauge Port*  
*4PL = 4 Port Reverse Entry Relief Valve and Gauge Port*  
 High Pressure port standard is 1/8" NPT Female. 1/4" NPT Female on auxiliary outlet ports.

 **Optional Features**  
*RV = Relief Valve*  
*SL1 = SilcoNert™ 1000 Coating on wetted metallic components only. Does not include gauges or relief valves.*

Additional configurations available upon request

**Note:** Veriflo reserves the right to plug NPT ports. If a true ported body is required, please contact Customer Service.

Product Certifications	
North American Certification	 CLASS I GROUPS A, B, C & D US LR99181
European Union Certification	 0344  II 2 G ExdIIC T3 KEMA 03ATEX2359

# AVR4 Series

## Specifications

Materials of Construction	
<b>Wetted</b>	
Body Options	316L Stainless Steel (std), Monel® or Hastelloy C-22®
Compression Member	Inconel® 625
Diaphragm	Hastelloy C-22®
Poppet	Hastelloy C-276®
Poppet Spring	Inconel® X750
Seat Options	PCTFE (std), PEEK™ or Vespel®
Carrier Options	316L Stainless Steel (std) or Hastelloy C-22®
Heater Seal	PEEK™
O-ring Back-up	FKM
<b>Non-wetted</b>	
Cap	303 Stainless Steel
Nut	316L Stainless Steel
Condulet	Cast Iron Alloy and Aluminum
Operating Conditions	
Maximum Inlet	3,500 psig (241 barg) or 250 psig (17.2 barg) for 10 psig range
Outlet Options	0-10 psig (0.7 barg), 1-30 psig (2 barg), 2-60 psig (4 barg), 3-100 psig (7 barg), 10-250 psig (17 barg), 20-500 psig (35 barg)
Temperature	<i>based upon seat option</i>
PCTFE	150°F (66°C)
PEEK™	275°F (135°C)
Vespel®	500°F (260°C)
Ambient Temperature	-4°F to +104°F (-20°C to +40°C)

Functional Performance	
<b>Design</b>	
Burst Pressure	10,500 psig (724 barg)
Proof Pressure	5,250 psig (362 barg)
<b>Flow Capacity</b>	C <sub>v</sub> 0.06 Nominal
<b>Leak Rate</b>	
Internal	Bubble Tight
External	Bubble Tight
<b>Internal Volume</b>	
High Pressure Inlet	0.57 cc
Overall	4.6 cc
<b>Approx. Weight</b>	8 lbs. (2.0 kg)
Electrical Specifications	
Power Requirements	120V or 240V, 50/60 Hz
Heater Wattage	40, 100, 150 or 200 watt
Temperature Controller	75°F to 220°F or 215°F to 380°F (24°C to 105°C or 102°C to 194°C) <i>(Proportional)</i> <i>Ranges are approximate</i>
Condulet	Crouse Hinds, UL and CSA listed Class 1, Groups A, B, C, D; Class 2, Groups E, F, G

For additional information on materials of construction, functional performance and operating conditions, see Regulator Technical Bulletin.

Hastelloy C-22® and Hastelloy C-276® are registered trademarks of Haynes International, Inc. PEEK™ is a trademark of Victrex plc. Inconel® and Monel® are registered trademarks of Special Metals Corporation. Vespel® is a registered trademark of DuPont Performance Elastomers L.L.C. SilcoNert™ 1000 is a trademark of SilcoTek Corporation.

### OFFER OF SALE:

The items described in this document are hereby offered for sale by Parker-Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by the provisions stated in the detailed "Offer of Sale" elsewhere in this document or available at [www.parker.com/veriflo](http://www.parker.com/veriflo)

### WARNING USER RESPONSIBILITY

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE. THIS DOCUMENT IS FOR REFERENCE ONLY. PLEASE CONSULT FACTORY FOR LATEST PRODUCT DRAWINGS AND SPECIFICATIONS

This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.

The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.

To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing are subject to change by Parker Hannifin Corp and its subsidiaries at any time without notice.

Proposition 65 Warning: This product contains chemicals known to the state of California to cause cancer or birth defects or other reproductive harm.

© 2007 Parker Hannifin Corporation



Use mobile device to scan this QR Code.

LitPN: 25000137

Rev: H

Date of Issue 05/2013



**Hanley Controls Clonmel Ltd**  
Gortnafeur, Clonmel, Co. Tipperary  
Tel: +353 (0)52 6122722  
e-mail: [info@hccl.ie](mailto:info@hccl.ie)  
web: [www.hccl.ie](http://www.hccl.ie)

ENGINEERING YOUR SUCCESS.