


PROTECT RPZ Valve, Type BA, Union Thread, Figure 360 0G

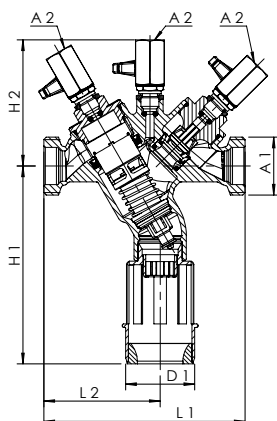

Product Features

- to protect drinking water against backflow of fluids up to and including category 4 according DIN EN 1717 / DIN 1988-100
- wetted metal parts made from dezincification-free and corrosion-resistant gunmetal, resistant against aggressive water
- with stainless steel mesh at inlet
- integrated differential pressure controlled and low-maintenance protection cartridge including CV
- with controllable reduced pressure zone
- male union thread
- with three assembled valves
- drain connection of plastic and gunmetal according to DIN EN 1717
- inlet and outlet with check cartridge
- free from dead spots
- for horizontal installation

Standards and Approvals

- DVGW approval
- ÖVGW approval
- SVGW approval up to DN 40
- KIWA approval up to DN 40
- BELGAQUA approval up to DN 40
- plastic parts with KTW- and W270 approval
- up to DN 25 sound protection certification according to DIN EN ISO 3822 class 1 (DN 32 class 2).
- EN 12730 / EN 1717

Technical Data

- pressure rating PN 10
- max. operating temperature 60 °C
- short-term peak temperature 65 °C

Part No.	DN	A1	A2	D1	H1	H2	L1	L2	Wt
				mm	mm	mm	mm	mm	kg
3600G01500	15	G 3/4	G 1/4	50	143.5	91.5	135	80	1.74
3600G02000	20	G 1	G 1/4	50	143	91.5	140	81.5	1.76
3600G02500	25	G 1 1/4	G 1/4	50	172	94.5	168	98.5	2.37
3600G03200	32	G 1 1/2	G 1/4	50	163	103.5	180	98.5	2.56
3600G04000	40	G 1 3/4	G 1/4	50	179	146	226	139.5	5.64
3600G05000	50	G 2 3/8	G 1/4	50	179	146	230	143	5.84

accessories

Differential Pressure Measurement Set, Figure 360 99
 Union Connections

page

15.18
 from15.4