aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding

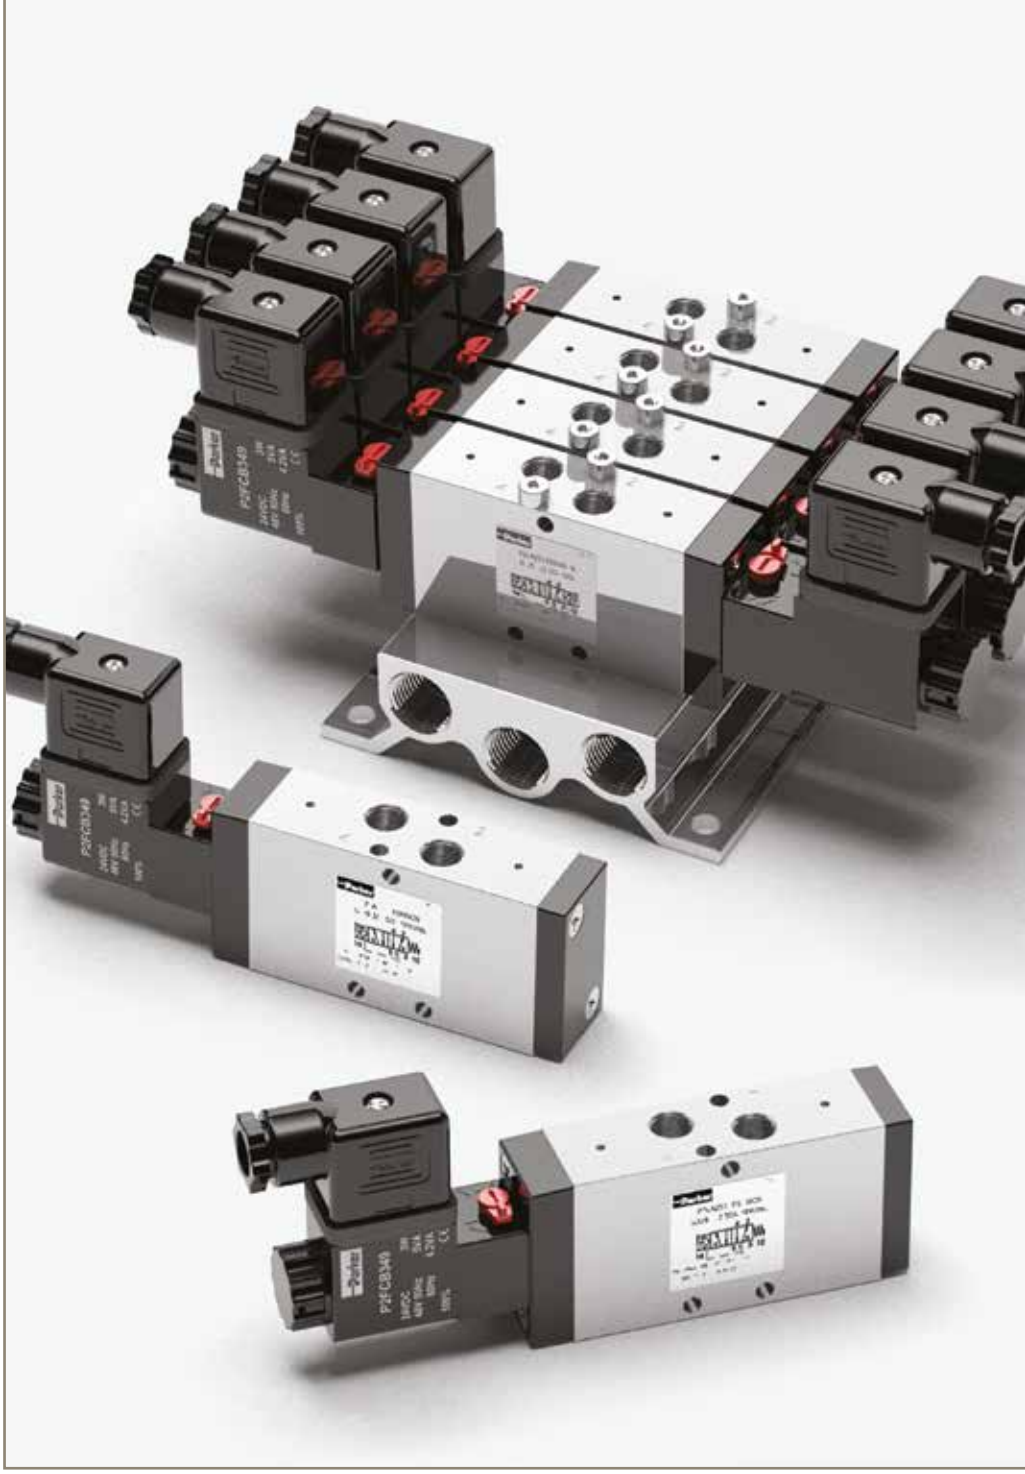

Pneumatic Valves
Viking Lite Series

G1/8 - G3/8 body ported

Catalogue PDE2658TCUK May 2015

Parker

HANLEY CONTROLS
CLONMEL
www.hccl.ie

ENGINEERING YOUR SUCCESS.

Material Specification..... 3 - 6
Flow Characteristics..... 7
Viking Lite Part Number System..... 8
Main Data Electrically Actuated Directional Control Valves..... 9
Dimensions - P2LAZ / P2LBZ / P2LCZ..... 10 - 15
P2LA, Accessory Order Codes 17
P2LB, Accessory Order Codes ..... 16 - 18
Manifold Dimensions..... 16 - 18
Solenoid Valves - 22mm..... 19
Solenoid Valves Technical Data - 22mm..... 20
Solenoid Connectors + Cable Plugs..... 20

Important !
Before carrying out any service work, ensure that the valve and manifold have been vented.
Remove the primary supply air hose to ensure total disconnection of the air supply before dismantling valves or blank connection blocks.

NB !
All technical data in this catalogue is typical only.

The air quality is decisive for the valve life: see ISO 8573.

WARNING

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.
This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met. The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

SALE CONDITIONS

The items described in this document are available for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. Any sale contract entered into by Parker will be governed by the provisions stated in Parker's standard terms and conditions of sale (copy available upon request).

Viking Lite ...

robust, versatile high performance with long service life

The Viking Lite valve range is robust, versatile and combines high performance with compact installation dimensions. The choice of G1/8, G1/4 or G3/8 port sizes provide large flow capacity, short change-over times for maximum productivity and the low change-over pressure is an important characteristic of this valve range.

Designed to operate with pressures up to 10 bar in temperatures -10°C to + 50°C.

Wear compensating system

Viking Lite valves are fitted with dynamic bi-directional spool seals suitable for pressures up to 10 bar, in ambient temperatures -10°C to + 50°C. Under pressure radial expansion of the seal occurs to maintain sealing contact with the valve bore.
This sealing method reduces friction gives lower pilot pressures, providing fast response and less wear. Valves do not require lubrication in operation but they can also be installed in systems that are lubricated.

Viking Lite range

P2LAZ, G1/8 - Cv = 0.6
P2LBZ, G1/4 - Cv = 1.5
P2LCZ, G3/8 - Cv = 2.5

WCS
Wear Compensating System



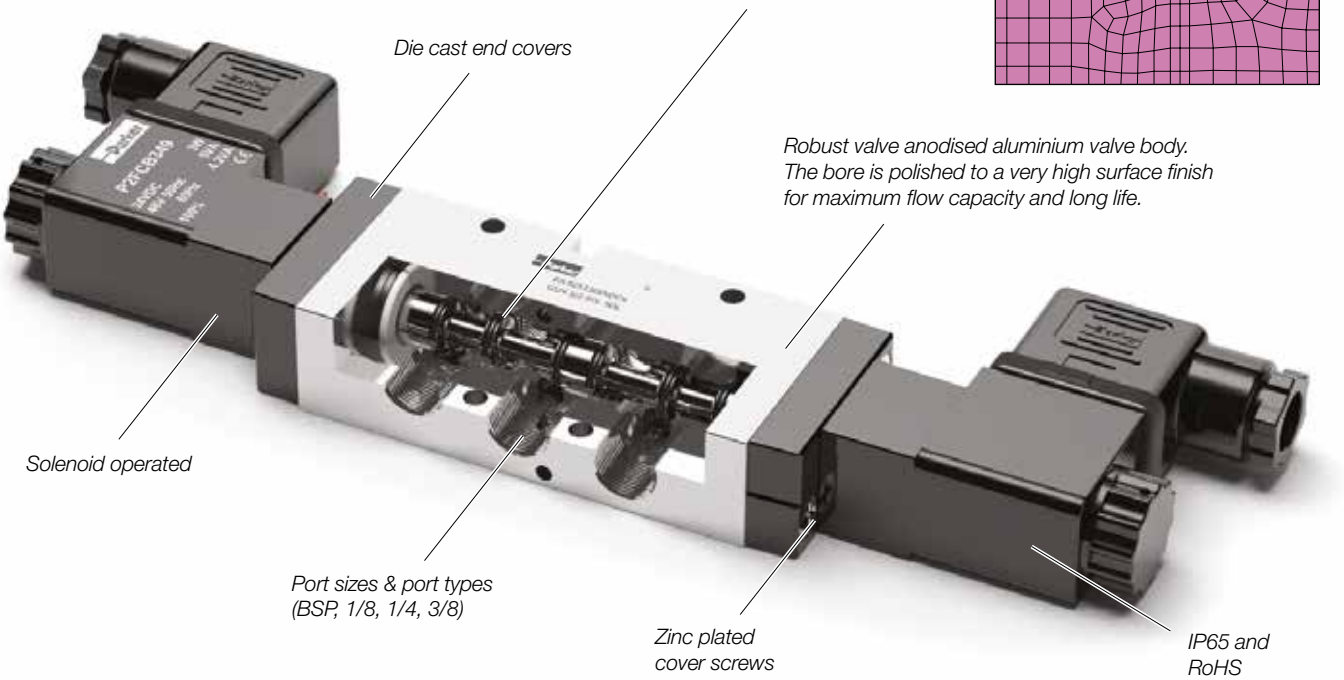

Viking Lite ...

rust and corrosion resistant, high reliability with flexible installation

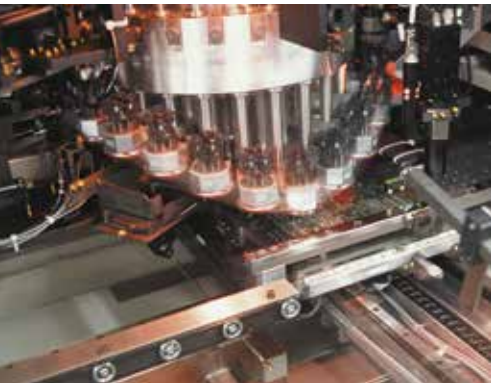

Rust and corrosion resistant designs.
Viking Lite valves are made of anodized aluminium, for good corrosion resistance. The smooth design, with no dirt-collecting pockets, makes the valve suitable for most environments.

High reliability
Viking Lite valves easily comply with the requirements for the component reliability in accordance with EU Machinery Directive standards EN292-2 and EN983. The valves are designed for use with or without supplementary lubrication.

Compact dimensions for flexibility in installations
Compact dimensions, direct body porting and integral mounting holes are all features of the Viking Lite range.
In addition to single valve installation, the Viking Lite valves may be installed on manifolds so that the valves have a common supply and manifolded exhausts.

Manifold bar installation
A manifold bar, with common ducts for ports 1, 3 and 5 gives simple, time saving and easily serviced installation. Manifold bars are available in several different sizes, with space for between 2 and 14 valves.

Pressure bar installation
A pressure bar for common primary air supply gives a simple, robust, time saving and easily serviced installation. When pressure bars are used, restrictor-silencers can be installed in the exhaust ports of each valve, for individual adjustment of cylinder/air motor speed. Pressure bars are available in a number of different sizes, with space ranging from 2 to 10 valves.

Extreme applications
For extreme applications, -40 degrees and up to 16 bar pressure use **VikingXtreme valves** :
see catalogue PDE2569TCUK

Working medium, air quality

Working medium: Dry, filtered compressed air to ISO 8573-1 class 3.4.3.

Recommended air quality for valves

For best possible service life and trouble free operation, ISO 8573-1 quality class 3.4.3 should be used. This means 5µm filter (standard filter) dew point +3°C for indoor operation (a lower dew point should be selected for outdoor operation) and oil concentration 1.0 mg oil/m³, which is what a standard compressor with a standard filter gives.

ISO 8573-1 quality classes

Quality class	Pollution particle size (µm)	Pollution max. concentration (mg/m³)	Water max. press. dew point (°C)	Oil max. concentration (mg/m³)
1	0,1	0,1	-70	0,01
2	1	1	-40	0,1
3	5	5	-20	1,0
4	15	8	+3	5,0
5	40	10	+7	25
6	-	-	+10	-

Typical cylinder speeds which can be achieved with Viking valves and different tube sizes.

In the chart below you can find the suitable valves, tubes etc. for each cylinder size. If you have a tube length over 2m, choose one tube size larger than in the chart.

Following data is valid:

Supply pressure : min 7.0 bar

Regulator pressure setting : 6.0 bar

Pipe length between air treatment unit and valve : max 1m

Pipe length between valve and cylinder : max 2m

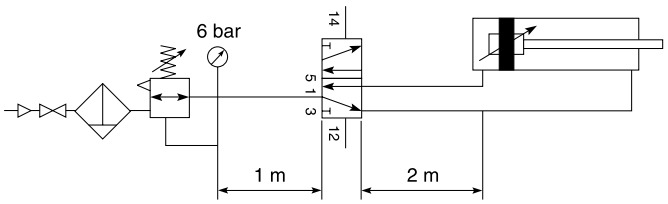

Cylinder bore	<20	20-32	40-50	63	80	100	125
Cylinder port	M5	G1/8	G1/4	G3/8	G3/8	G1/2	G1/2
Tubing Ext/Int	4/2.7	6/4	8/6	10/8	10/8	12/9	14/11
			6/4	8/6	12/9	14/11	
P2LAZ	G1/8	G1/8	G1/8	G1/8	G1/8		
P2LBZ	G1/4	G1/4	G1/4	G1/4	G1/4	G1/4	
P2LCZ			G3/8	G3/8	G3/8	G3/8	G3/8

Cylinder speed < 0,5 m/s

Cylinder speed < 1 m/s

Oversized

Cylinder speed > 1 m/s

Material specification

P2LAZ

Valve

Valve body	Anodised aluminium
End covers	Anodised aluminium
Spool	Aluminium
Piston	Acetal plastic/ Anodised aluminium
End cover sealings	Nitrile rubber
End cover screws	Zinc plated steel
Springs	Stainless steel
Mounting screws for solenoid	Stainless steel
Spool seals	Nitrile
Pilot adaptor	Acetal plastic

Accessories

Manifold bar	Anodised aluminium
Pressure bar	Anodised aluminium

P2LBZ

Valve

Valve body	Anodised aluminium
End covers	Anodised aluminium
Spool	Aluminium
Piston	Acetal plastic/ Anodised aluminium
End cover sealings	Nitrile rubber
End cover screws	Zinc plated steel
Springs	Stainless steel
Mounting screws for solenoid	Stainless steel
Spool seals	Nitrile
Pilot adaptor	Acetal plastic

Accessories

Manifold bar	Anodised aluminium
Pressure bar	Anodised aluminium

P2LCZ

Valve

Valve body	Anodised aluminium
End covers	Anodised aluminium
Spool	Aluminium
Piston	Acetal plastic/ Anodised aluminium
End cover sealings	Nitrile rubber
End cover screws	Zinc plated steel
Springs	Stainless steel
Mounting screws for solenoid	Stainless steel
Spool seals	Nitrile
Pilot adaptor	Acetal plastic

Flow characteristics

Flow capacities in accordance with ISO6358
All pressures = effective pressure
The curves in the diagram below are typical only

Technical Data P2LAZ

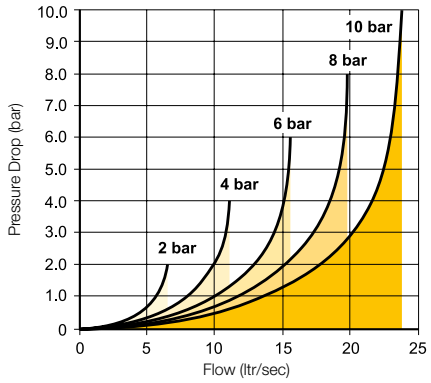

Port size	G1/8
Maximum Operating pressure	10 bar
Working temperature.	-10°C to + 50°C
Flow (acc. to ISO 6358)	c = 2.2 Nl/s x bar
	b = 0.3
	Qn = 10.1 l/s
	Qmax = 15.6 l/s
	Cv = 0.6

Technical Data P2LBZ

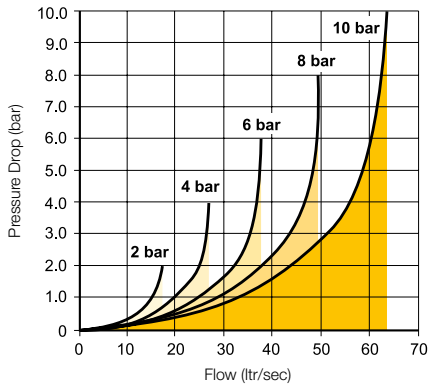

Port size	G1/4
Maximum Operating pressure	10 bar
Working temperature.	-10°C to + 50°C
Flow (acc. to ISO 6358)	c = 5.4 Nl/s x bar
	b = 0.3
	Qn = 24.6 l/s
	Qmax = 37.8 l/s
	Cv = 1.5

Technical Data P2LCZ

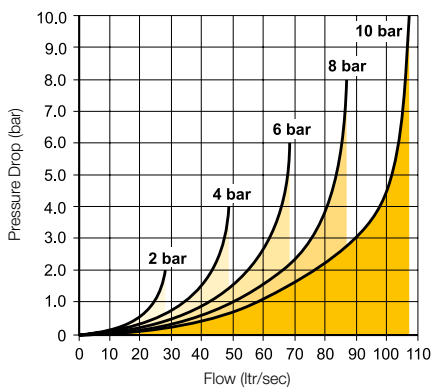

Port size	G3/8
Maximum Operating pressure	10 bar
Working temperature.	-10°C to + 50°C
Flow (acc. to ISO 6358)	c = 9.7 Nl/s x bar
	b = 0.3
	Qn = 41.5 l/s
	Qmax = 68.3 l/s
	Cv = 2.5

Viking Lite Part Number System

Solenoid options

P	2	L	A	Z	5	1	1	E	S	N	D	B	B	4	9

	Valve family
P2L	Inline Valve

	Size
A	1/8
B	1/4
C	3/8

	Version
Z	Viking Lite

	Port thread
11	G1/8
12	G1/4
13	G3/8
91	1/8 NPT
92	1/4 NPT
93	3/8 NPT

	Actuator / Return
E	Solenoid operated
P	Air signal - 3/2, 5/2
P	Air signal - 5/3
S	Spring (return only)

	Solenoid Pilot Type
N	10 bar/-10°C to 50°C

	Solenoid Exhaust
D	Vented

	Overrides
B	Flush non locking
C	Lever twist locking

	Enclosure / Lead length
B	22mm DIN 43650 B + Coil
N	22mm Solenoid Less Coil

Voltage	
49	24V DC
Blank	Valve less solenoid/coil

Valve type function		
Solenoid operated with internal supply to solenoid		
3		3/2 valve
5		5/2 valve
6		5/3 valve closed centre
7		5/3 valve pressurised centre
8		5/3 valve vented centre

Shaded part numbers are available from stock.
Unshaded part numbers are available on request but will be subject to minimum order quantities.

Solenoid operated directional control valves

Internal supply to solenoid valve(s) via port 1.
Max operating pressure 10 bar, temperature range -10°C to +50°C

3/2 valves, internal air, standard temperature

Symbol	Size	Actuation	Return	Min Operating Pressure (bar)	Changeover time (ms) at 6 bar @20°C actua./return	Weight Kg	Order code Without coil	Order code With 24V DC (22mm coil)
	G1/8	Air signal	Air signal	1.5	5/5	0.18	**P2LAZ311PP**	
	G1/4			1.5	6/6	0.18	**P2LBZ312PP**	
	G3/8			1.5	8/8	0.36	**P2LCZ313PP**	
	G1/8	Air signal	Spring	3.0	8/15	0.16	**P2LAZ311PS**	
	G1/4			3.0	10/20	0.16	**P2LBZ312PS**	
	G3/8			3.0	10/30	0.35	**P2LCZ313PS**	
	G1/8	Electric signal	Electric signal	1.5	10/10	0.18	**P2LAZ311EENDCN**	**P2LAZ311EENDCB49**
	G1/4			1.5	12/12	0.18	**P2LBZ312EENDCN**	**P2LBZ312EENDCB49**
	G3/8			1.5	17/17	0.36	**P2LCZ313EENDCN**	**P2LCZ313EENDCB49**
	G1/8	Electric signal	Spring	3.0	15/35	0.16	**P2LAZ311ESNDCN**	**P2LAZ311ESNDCB49**
	G1/4			3.0	18/45	0.16	**P2LBZ312ESNDCN**	**P2LBZ312ESNDCB49**
	G3/8			3.0	27/75	0.35	**P2LCZ313ESNDCN**	**P2LCZ313ESNDCB49**

5/2 valves, internal air, standard temperature

Symbol	Size	Actuation	Return	Min Operating Pressure (bar)	Changeover time (ms) at 6 bar @20°C actua./return	Weight Kg	Order code Without coil	Order code With 24V DC (22mm coil)
	G1/8	Air signal	Air signal	1.5	5/5	0.18	**P2LAZ511PP**	
	G1/4			1.5	6/6	0.18	**P2LBZ512PP**	
	G3/8			1.5	8/8	0.36	**P2LCZ513PP**	
	G1/8	Air signal	Spring	3.0	8/15	0.16	**P2LAZ511PS**	
	G1/4			3.0	10/20	0.16	**P2LBZ512PS**	
	G3/8			3.0	10/30	0.35	**P2LCZ513PS**	
	G1/8	Electric signal	Electric signal	1.5	10/10	0.19	**P2LAZ511EENDCN**	**P2LAZ511EENDCB49**
	G1/4			1.5	12/12	0.21	**P2LBZ512EENDCN**	**P2LBZ512EENDCB49**
	G3/8			1.5	17/17	0.44	**P2LCZ513EENDCN**	**P2LCZ513EENDCB49**
	G1/8	Electric signal	Spring	3.0	15/35	0.17	**P2LAZ511ESNDCN**	**P2LAZ511ESNDCB49**
	G1/4			3.0	18/45	0.20	**P2LBZ512ESNDCN**	**P2LBZ512ESNDCB49**
	G3/8			3.0	27/75	0.43	**P2LCZ513ESNDCN**	**P2LCZ513ESNDCB49**

5/3 valves, internal air, standard temperature

Symbol	Size	Actuation		Min Operating Pressure (bar)	Changeover time (ms) at 6 bar @20°C actua./return	Weight Kg	Order code Without coil	Order code With 24V DC (22mm coil)
	G1/8	Electric/Electric	Self centring	3.0	18/40	0.26	**P2LAZ611EENDCN**	**P2LAZ611EENDCB49**
	G1/4		Closed	3.0	22/55	0.28	**P2LBZ612EENDCN**	**P2LBZ612EENDCB49**
	G3/8		Centre	3.0	30/90	0.60	**P2LCZ613EENDCN**	**P2LCZ613EENDCB49**
	G1/8	Electric/Electric	Self centring	3.0	18/40	0.26	**P2LAZ711EENDCN**	**P2LAZ711EENDCB49**
	G1/4		Presurised	3.0	22/45	0.28	**P2LBZ712EENDCN**	**P2LBZ712EENDCB49**
	G3/8		Centre	3.0	30/90	0.60	**P2LCZ713EENDCN**	**P2LCZ713EENDCB49**
	G1/8	Electric/Electric	Self centring	3.0	18/40	0.26	**P2LAZ811EENDCN**	**P2LAZ811EENDCB49**
	G1/4		Vented	3.0	22/45	0.28	**P2LBZ812EENDCN**	**P2LBZ812EENDCB49**
	G3/8		Centre	3.0	30/90	0.60	**P2LCZ813EENDCN**	**P2LCZ813EENDCB49**

Dimensions

P2LAZ 3/2
Air / Air

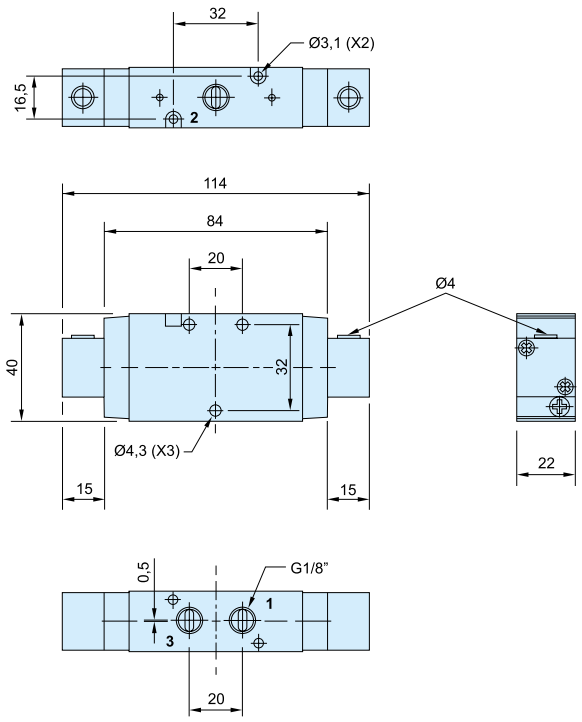

P2LAZ 3/2
Air / Spring

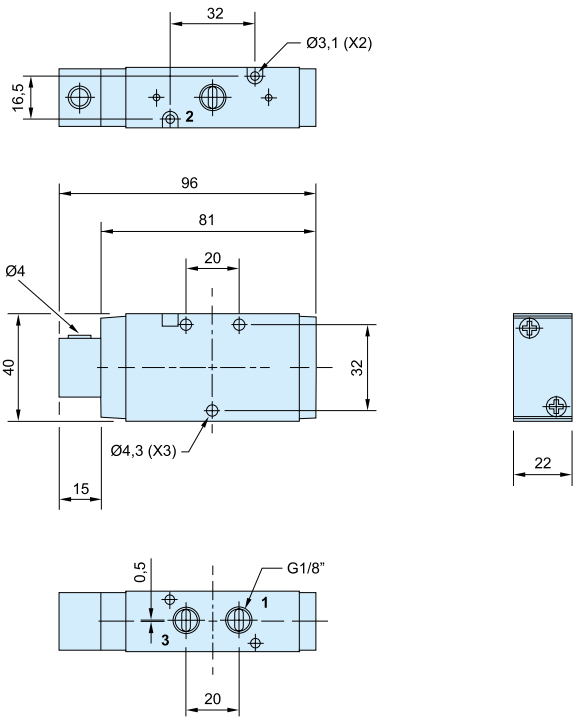

P2LAZ 3/2
Solenoid / Solenoid

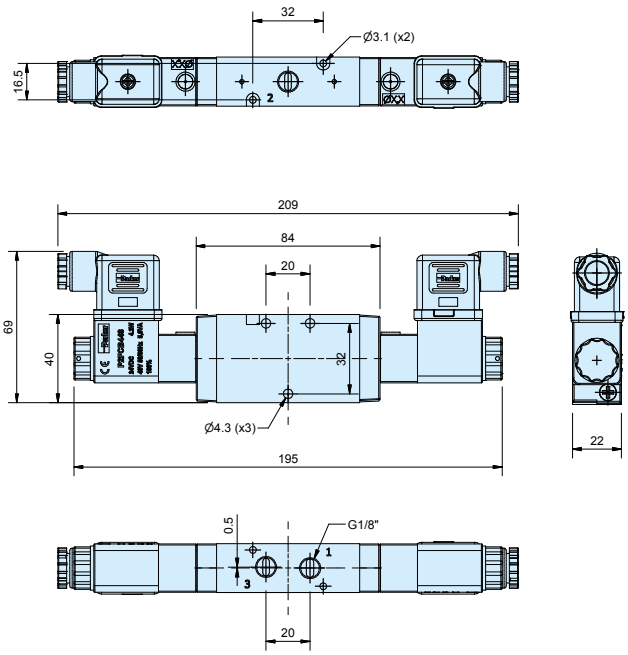

P2LAZ 3/2
Solenoid / Spring

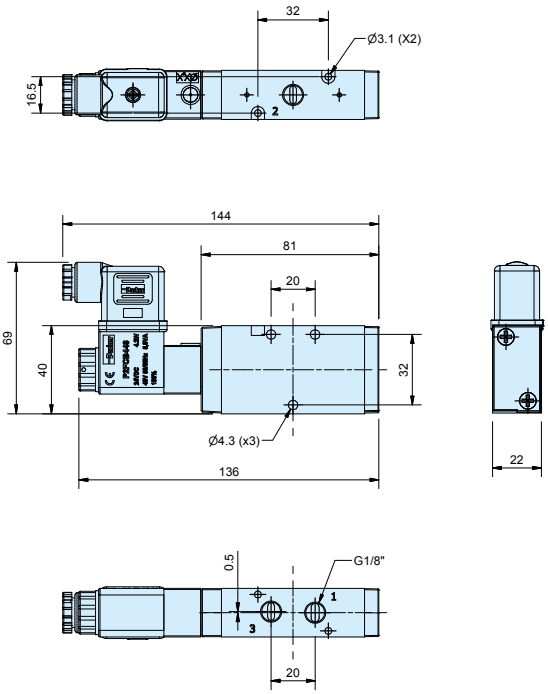

Solenoid valves
Solenoid valves and cable plugs must be ordered separately. One pilot valve is required for each E (NDCN only) in the valve order code.

Dimensions

P2LAZ 5/2
Solenoid / Solenoid

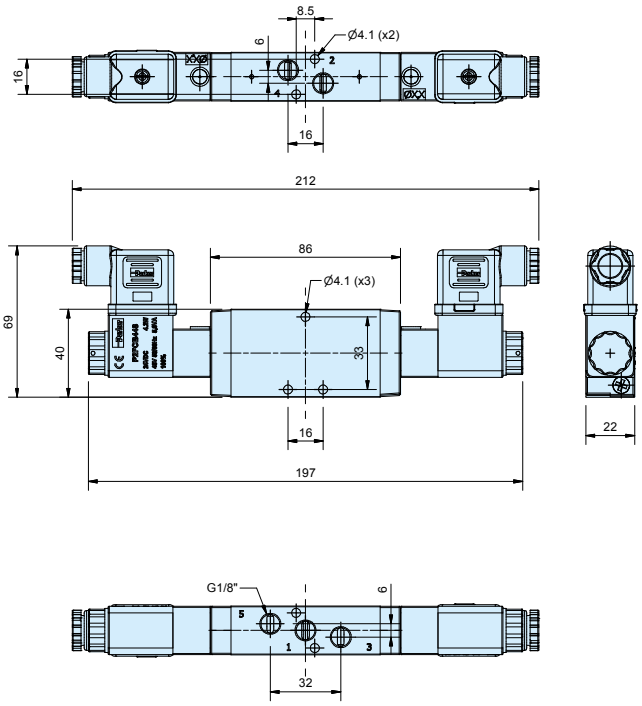

P2LAZ 5/2
Solenoid / Spring

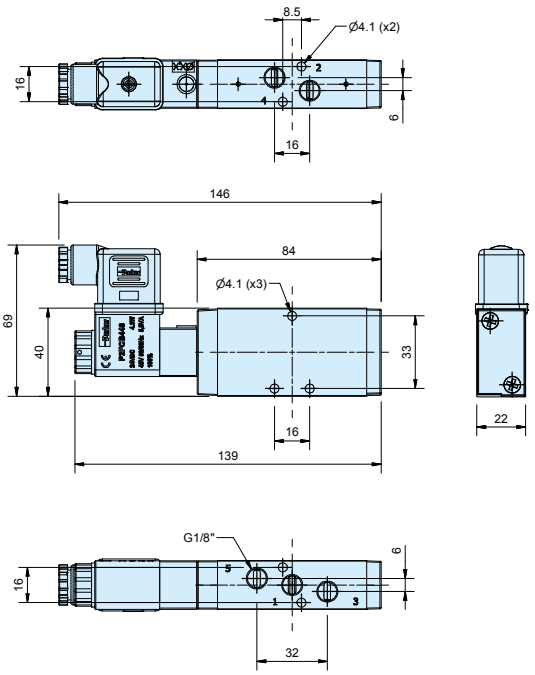

P2LAZ 5/3
Solenoid / Solenoid

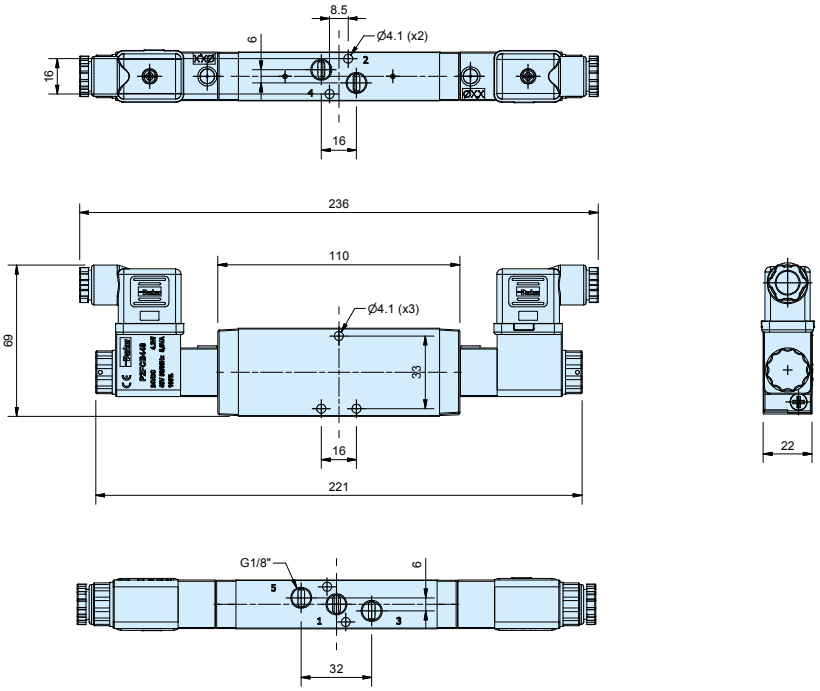

Solenoid valves
Solenoid valves and cable plugs must be ordered separately. One pilot valve is required for each E (NDCN only) in the valve order code.

Dimensions

P2LBZ 3/2
Air / Air

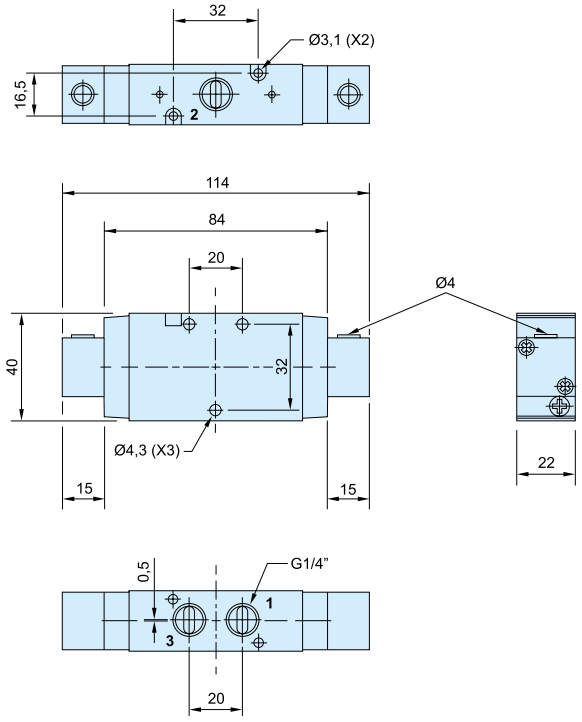

P2LBZ 3/2
Air / Spring

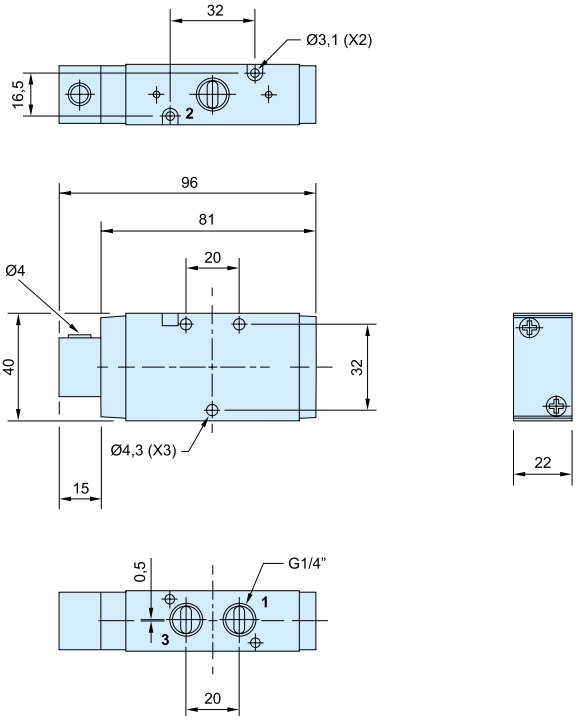

P2LBZ 3/2
Solenoid / Solenoid

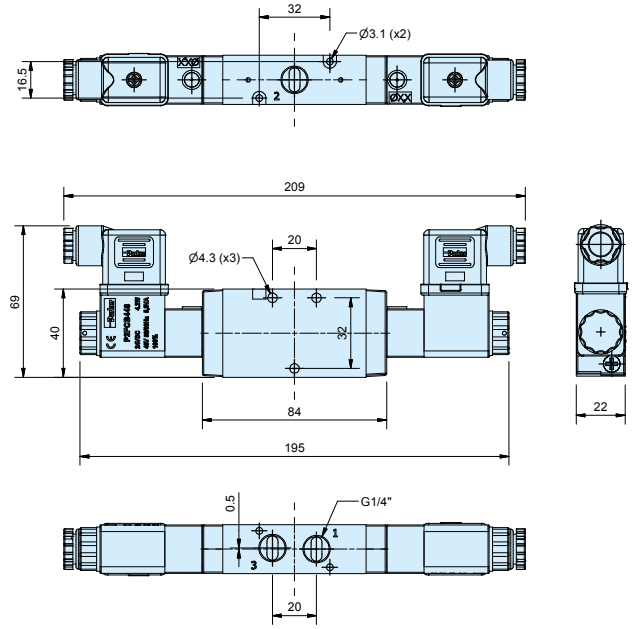

P2LBZ 3/2
Solenoid / Spring

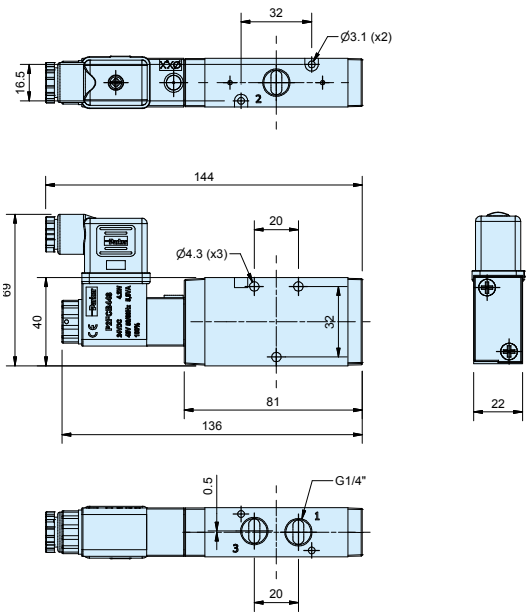

Solenoid valves
Solenoid valves and cable plugs must be ordered separately. One pilot valve is required for each E (NDCN only) in the valve order code.

Dimensions

P2LBZ 5/2
Solenoid / Solenoid

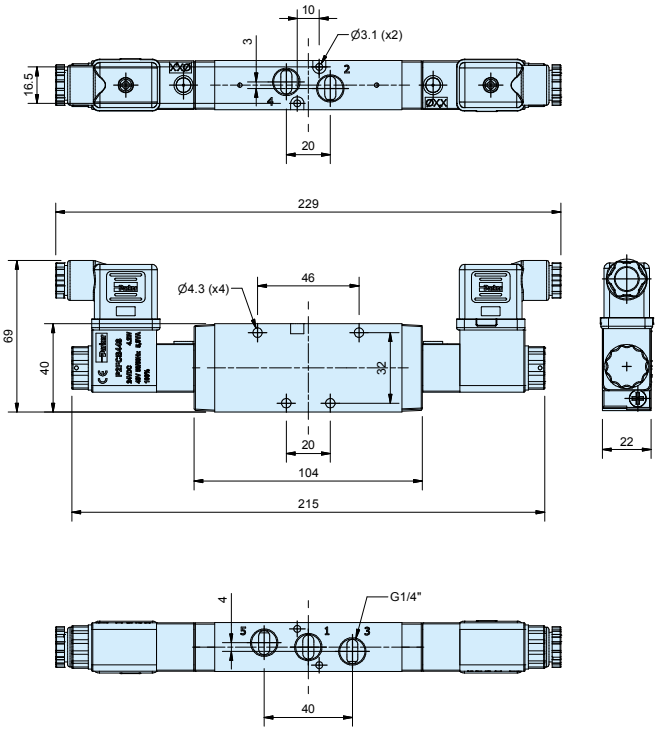

P2LBZ 5/2
Solenoid / Spring

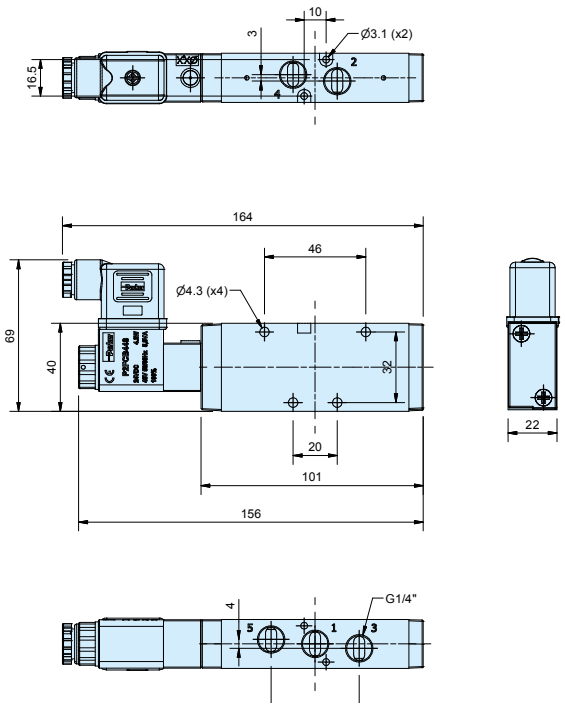

P2LBZ 5/3
Solenoid / Solenoid

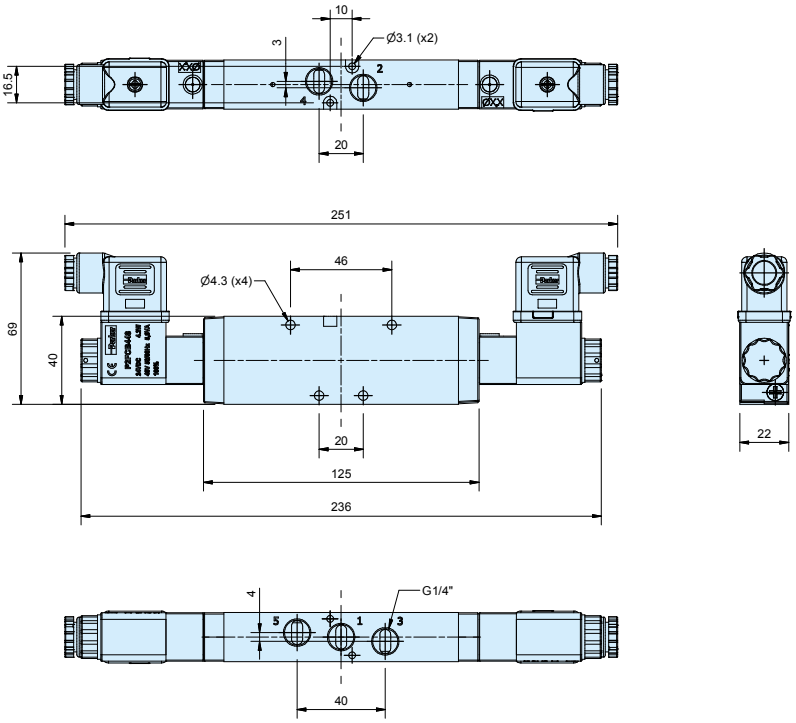

Solenoid valves
Solenoid valves and cable plugs must be ordered separately. One pilot valve is required for each E (NDCN only) in the valve order code.

Dimensions

P2LCZ 3/2
Air / Air

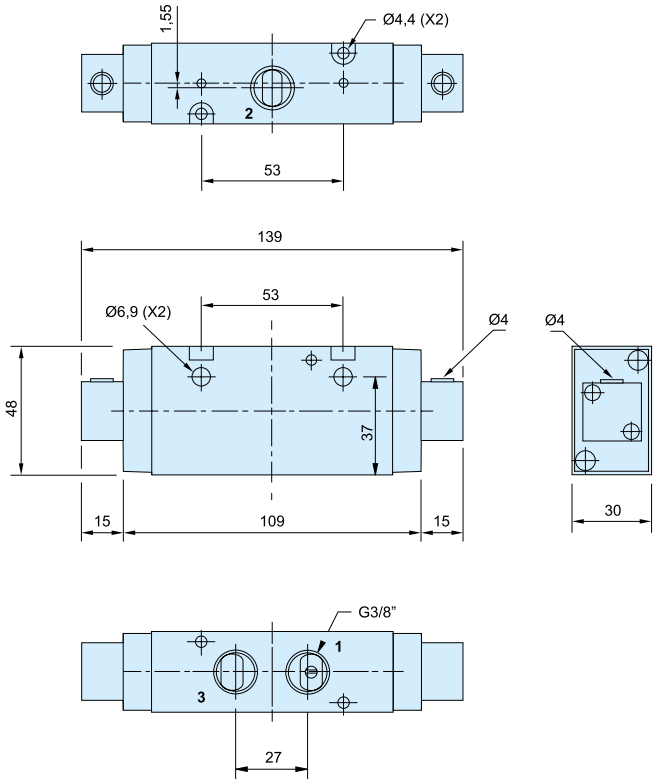

P2LCZ 3/2
Air / Spring

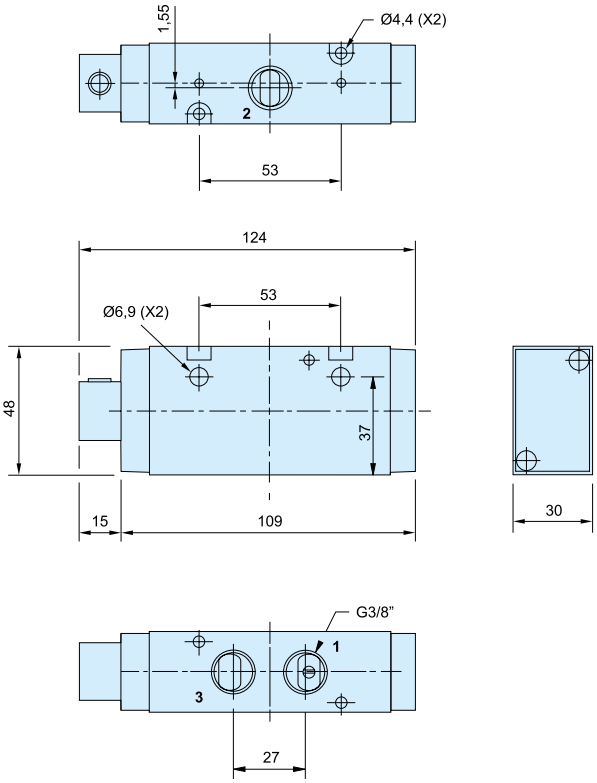

P2LCZ 3/2
Solenoid / Solenoid

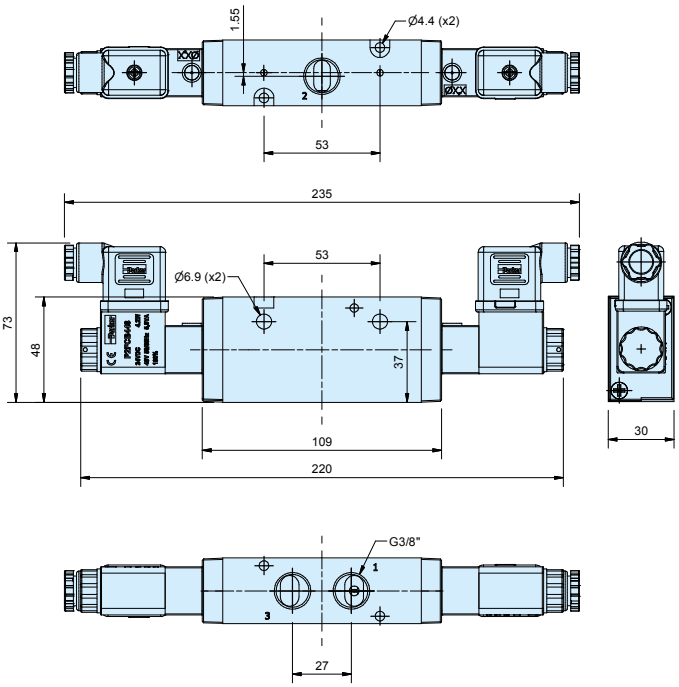

P2LCZ 3/2
Solenoid / Spring

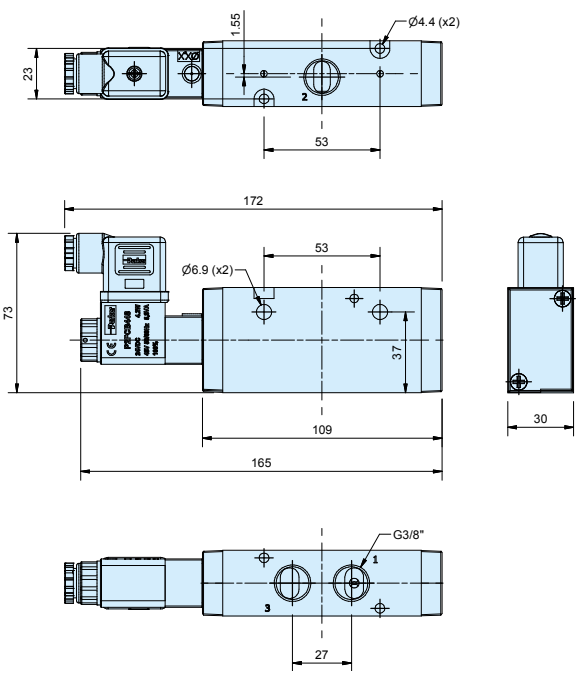

Dimensions

P2LCZ 5/2
Solenoid / Solenoid

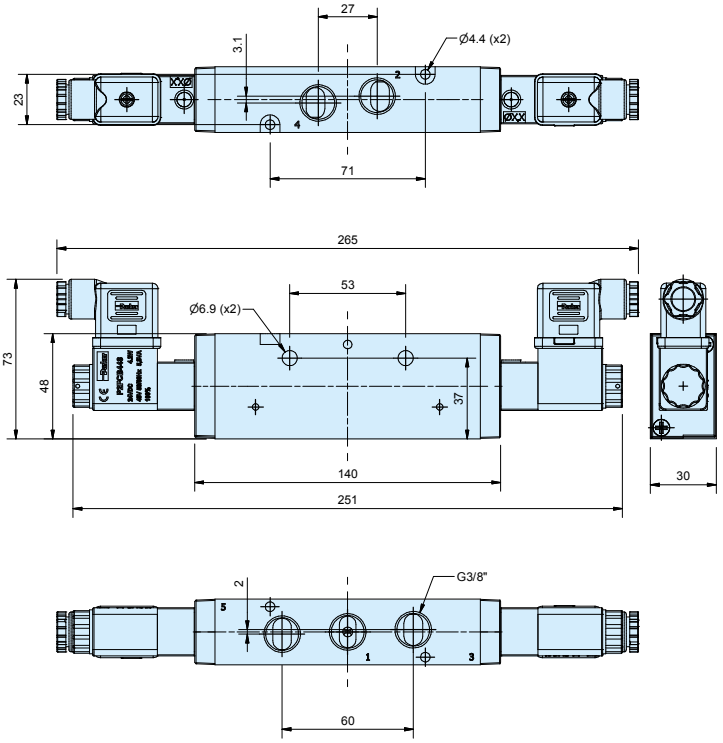

P2LCZ 5/2
Solenoid / Spring

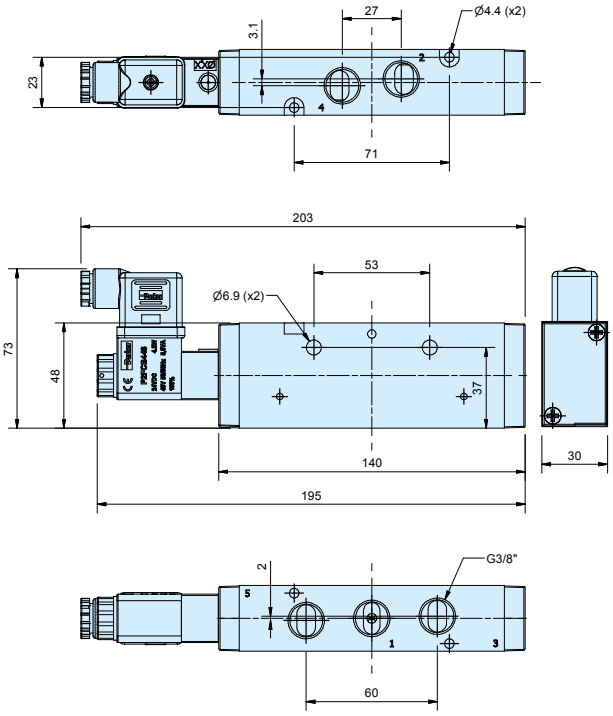

P2LCZ 5/3
Solenoid / Solenoid

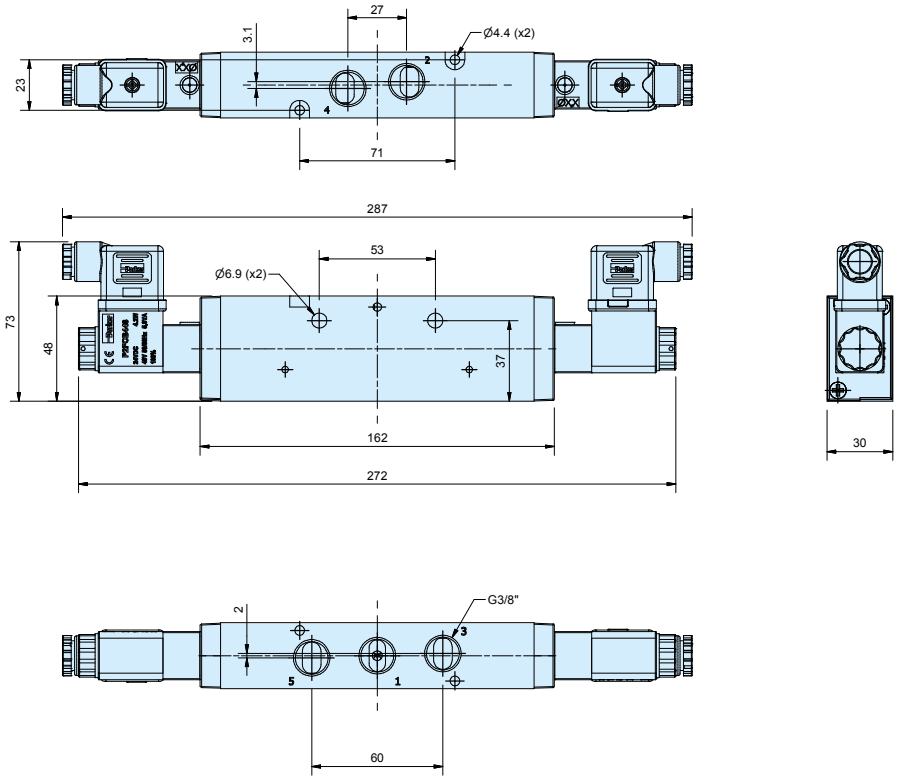

Accessories	Type P2LA / P2LB 3/2 valves	Weight kg	Order code
	Manifold bar, P2LB incl. fasteners and O-ring. G3/8		
	For 2 valves	0.38	**91213202SXZ**
	For 4 valves	0.64	**91213204SXZ**
	For 6 valves	0.89	**91213206SXZ**
	For 8 valves	1.15	**91213208SXZ**
	For 10 valves	1.40	**91213210SXZ**
	Blanking plate for Manifold bar	0.10	**912132BPSXZ**

Dimensions

Manifold bar

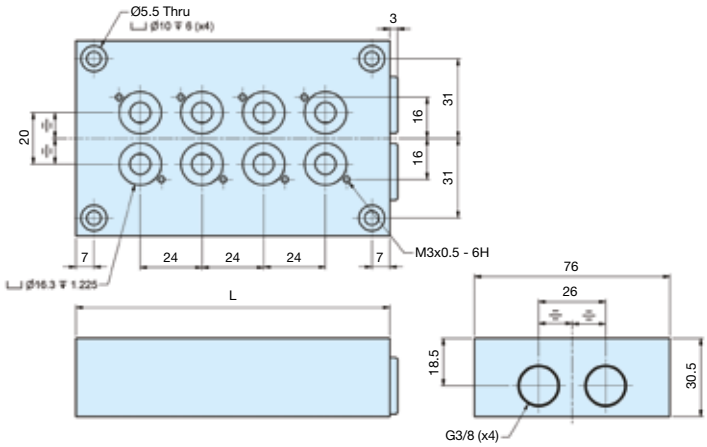

No. of valves	L mm
2	74
4	122
6	170
8	218
10	266

Blanking plate for manifold bar, P2LB



Accessories	Type P2LA 5/2 valves	Weight kg	Order code
	Manifold bar, P2LA including seals, mounting screws. G3/8		
	For 4 valves	0.48	**9121658075**
	For 6 valves	0.63	**9121658076**
	For 8 valves	0.80	**9121658077**
	For 10 valves	0.98	**9121658078**
	For 12 valves	1.10	**9121658079**
	For 14 valves	1.23	**9121658099**
	Blanking plate, P2LA for Manifold bar	0.05	**9121658063**
	Pressure bar, P2LA for common air supply incl. O-rings and mounting screws. G1/4		
	For 2 valves	0.13	**9121658070**
	For 4 valves	0.20	**9121658071**
	For 6 valves	0.26	**9121658072**
	For 8 valves	0.33	**9121658073**
	Blanking plate, P2LA for Pressure bar	0.05	**9121658074**
	Assembly screws, P2LA in stainless steel for valve	0.02	**9121658043**
	Assembly screws, P2LA in stainless steel for blanking plate	0.01	**9121658044**
	O-ring kit, P2LA O-rings between valve and manifold bar/Pressure bar	0.01	**9121658046**

Dimensions

Manifold bar, P2LA

No. of valves	L mm
4	126
6	174
8	222
10	270
12	318
14	366

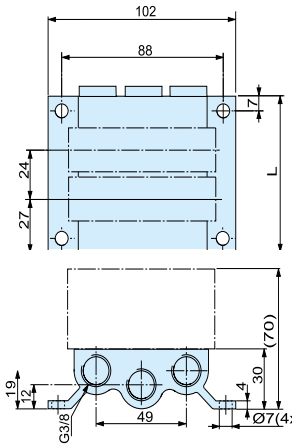

Blanking plate for manifold bar, P2LA



Pressure bar, P2LA

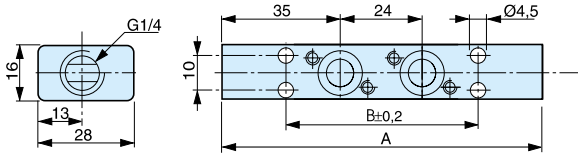

Blanking plate for pressure bar, P2LA



No. of valves	A mm	B mm
2	94	56
4	142	104
6	190	152
8	238	200

Accessories	Type P2LB 5/2 valves	Weight kg	Order code
	Manifold bar, P2LB incl. fasteners and O-ring. G3/8		
	For 2 valves	0.69	**9121594805X**
	For 4 valves	1.13	**9121594806X**
	For 6 valves	1.56	**9121594807X**
	For 8 valves	2.00	**9121594808X**
	For 10 valves	2.45	**9121594812X**
	Blanking plate, P2LB for Manifold bar	0.10	**9121594809X**
	Pressure bar, P2LB for common air supply incl. O-rings and mounting screws. G3/8		
	For 2 valves	0.38	**9127113301X**
	For 4 valves	0.53	**9127113302X**
	For 6 valves	0.68	**9127113303X**
	For 8 valves	0.83	**9127113304X**
	For 10 valves	0.99	**9127113305X**
	Blanking plate P2LB for Pressure bar. G1/4	0.02	**9127113306X**

Dimensions

Manifold bar, P2LB

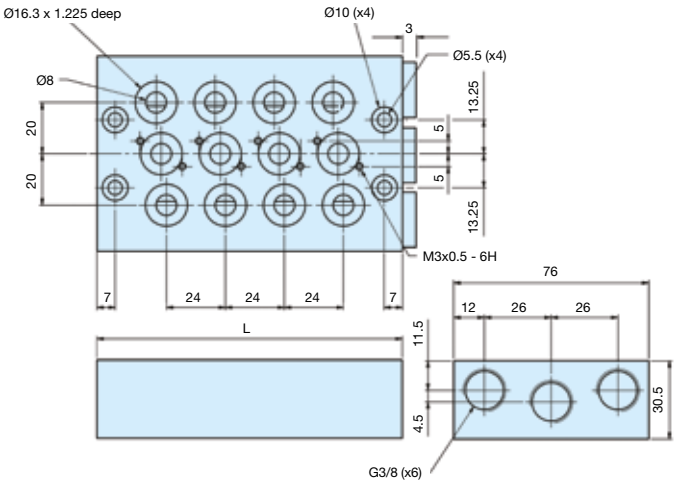

No. of valves	L mm
2	74
4	122
6	170
8	218
10	266

Blanking plate for manifold bar, P2LB



Pressure bar, P2LB

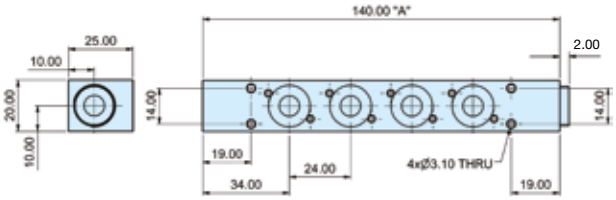

Blanking plate for pressure bar, P2LB



No. of valves	A mm
2	92
4	140
6	188
8	236
10	284

22mm Solenoid pilot options

The solenoid pilot operators are designed for piloting pneumatic control valves with compressed air or other inert gases.

The operator is available for normal operating pressures up to10 bar having an outlet orifice 1.2 mm and exhaust orifice 1.45 mm.

Corrosion resistant design

The pilot operator body is manufactured in thermoplastic PA 6 material and the core tube brass is stainless steel. The plunger/core is also made from stainless steel and the valve seats from FKM.

Solenoid Pilot Exhaust

These operators all exhaust out of the top of the core tube which is tapped M5. The standard solenoid nut fitted to the core tube is the Diffuser nut which allows the exhaust to escape to atmosphere. This nut also minimises ingress of dirt into the valve through this port. The alternative plastic knurled nut can be specified (refer to part number system) if the exhaust air needs to be captured and piped away using the M5 tapped port.

Coils

Coils are wound with enameled copper wire, having temperature index 180^{0}C with class F insulation (155^{0}C) and are encapsulated in Thermoplastic resin.
When fitted with suitable connector and correct gasket they give protection to IP65.

Manual Override options

The standard manual override is the bi-stable twist lock, extended plastic override. Non locking flush manual override available as option.

22mm solenoid operator part numbers and spares

Solenoid coils for 22mm solenoid operators

Voltage	Weight (Kg)	Order code Form B
12V 60Hz	0.093	**P2FCB340**
24V 50/60Hz	0.093	**P2FCB342**
12V DC	0.093	**P2FCB345**
24V DC	0.093	**P2FCB349**
48V DC	0.093	**P2FCB351**
110V/50Hz, 120V/60Hz	0.093	**P2FCB353**
230V/50Hz, 230V/60Hz	0.093	**P2FCB357**

Spare Solenoid Nuts

Valves requiring captured exhaust should be fitted with plastic knurled nut

Order code
P2FNP

Valves with vented exhaust are fitted with diffuser plastic nut

Order Code
P2FND

Solenoid Connectors / Cable Plugs EN175301-803

	Description	Order code 22mm Industrial Form B
With standard screw	Standard IP65 without flying lead	**3EV10V10**
	With LED and protection 24V AC/DC	**3EV10V20-24**
	With LED and protection 110V AC	**3EV10V20-110**
	With LED and protection 230V AC	**3EV10V20-230**
With cable	24V AC/DC, 5m cable LED and protection IP65	**3EV10V20-24L5**
	110V AC/DC, 5m cable LED and protection IP65	**3EV10V20-110L5**
	230V AC, 5m cable LED and protection IP65	**3EV10V20-230L5**





3EV10V10

3EV10V20-24	**3EV10V20-24L5**
3EV10V20-110	**3EV10V20-110L5**
3EV10V20-230	**3EV10V20-230L5**

Cable Plug Dimensions (mm)

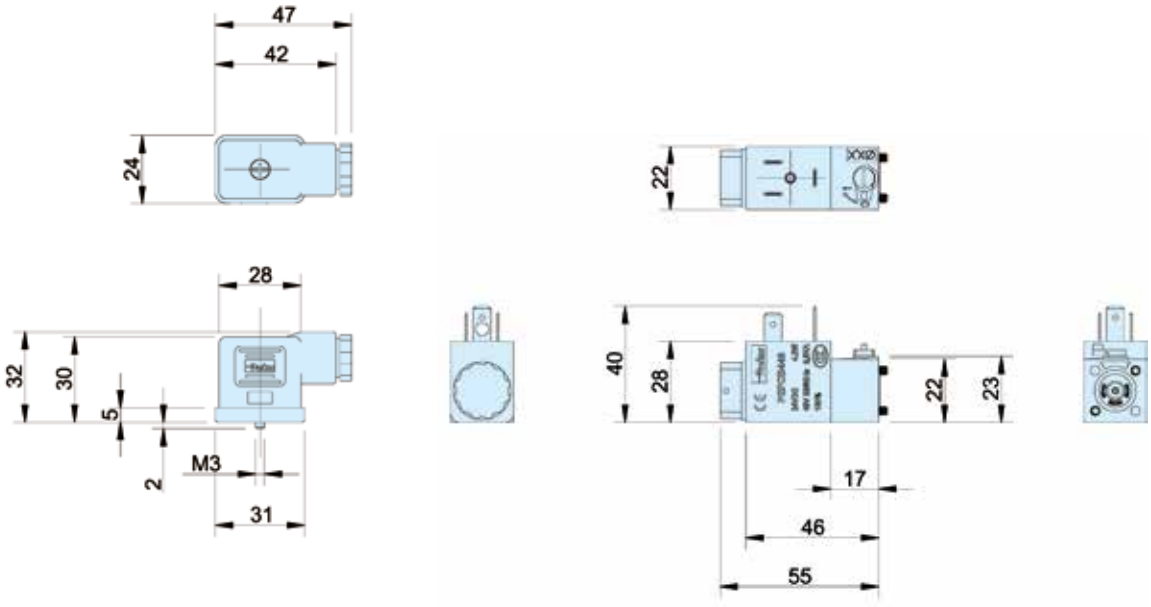

Parker Worldwide

Europe, Middle East, Africa

AE – United Arab Emirates, Dubai
Tel: +971 4 8127100
parker.me@parker.com

AT – Austria, Wiener Neustadt
Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe, Wiener Neustadt
Tel: +43 (0)2622 23501 900
parker.easteurope@parker.com

AZ – Azerbaijan, Baku
Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles
Tel: +32 (0)67 280 900
parker.belgium@parker.com

BG – Bulgaria, Sofia
Tel: +359 2 980 1344
parker.bulgaria@parker.com

BY – Belarus, Minsk
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

CH – Switzerland, Etoy
Tel: +41 (0)21 821 87 00
parker.switzerland@parker.com

CZ – Czech Republic, Klecany
Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst
Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup
Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid
Tel: +34 902 330 001
parker.spain@parker.com

FI – Finland, Vantaa
Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve
Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens
Tel: +30 210 933 6450
parker.greece@parker.com

HU – Hungary, Budaörs
Tel: +36 23 885 470
parker.hungary@parker.com

IE – Ireland, Dublin
Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IT – Italy, Corsico (MI)
Tel: +39 02 45 19 21
parker.italy@parker.com

KZ – Kazakhstan, Almaty
Tel: +7 7273 561 000
parker.easteurope@parker.com

NL – The Netherlands, Oldenzaal
Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Asker
Tel: +47 66 75 34 00
parker.norway@parker.com

PL – Poland, Warsaw
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal, Leca da Palmeira
Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest
Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow
Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga
Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SK – Slovakia, Banská Bystrica
Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto
Tel: +386 7 337 6650
parker.slovenia@parker.com

TR – Turkey, Istanbul
Tel: +90 216 4997081
parker.turkey@parker.com

UA – Ukraine, Kiev
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

UK – United Kingdom, Warwick
Tel: +44 (0)1926 317 878
parker.uk@parker.com

ZA – South Africa, Kempton Park
Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

North America

CA – Canada, Milton, Ontario
Tel: +1 905 693 3000

US – USA, Cleveland
Tel: +1 216 896 3000

Asia Pacific

AU – Australia, Castle Hill
Tel: +61 (0)2-9634 7777

CN – China, Shanghai
Tel: +86 21 2899 5000

HK – Hong Kong
Tel: +852 2428 8008

IN – India, Mumbai
Tel: +91 22 6513 7081-85

JP – Japan, Tokyo
Tel: +81 (0)3 6408 3901

KR – South Korea, Seoul
Tel: +82 2 559 0400

MY – Malaysia, Shah Alam
Tel: +60 3 7849 0800

NZ – New Zealand, Mt Wellington
Tel: +64 9 574 1744

SG – Singapore
Tel: +65 6887 6300

TH – Thailand, Bangkok
Tel: +662 186 7000

TW – Taiwan, Taipei
Tel: +886 2 2298 8987

South America

AR – Argentina, Buenos Aires
Tel: +54 3327 44 4129

BR – Brazil, Sao Jose dos Campos
Tel: +55 800 727 5374

CL – Chile, Santiago
Tel: +56 2 623 1216

MX – Mexico, Toluca
Tel: +52 72 2275 4200

European Product Information Centre
Free phone: 00 800 27 27 5374
(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

© 2015 Parker Hannifin Corporation. All rights reserved.

Catalogue PDE2658TCUK - V4 - May 2015

HANLEY CONTROLS
CLONMEL
www.hccl.ie

Your local authorized Parker distributor