HANLEY CONTROLS
CLONMEL
www.hccl.ie

High Performance Pneumatic Valves Viking Xtreme Series

G1/8- G1/2 body ported

Catalogue PDE2569TCUK January 2014

aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding

Parker

ENGINEERING YOUR SUCCESS.

Material Specification..... 7
Flow Characteristics..... 8
Order Key - Viking Xtreme Air Pilot & Manual Valves..... 9
Main Data Pneumatic + Manually Operated Valves..... 10 - 13
Order Key - Normal Operating Pressure..... 14
Main Data Electrically Actuated Directional Control Valves Normal ..... 15 - 20
Order Key - Viking Xtreme Valves..... 21
Main Data Electrically Actuated Directional Control Valves Xtreme..... 22 - 24
Dimensions - P2LAX / P2LBX / P2LCX / P2LDX..... 25 - 48
P2LA, Flexible Manifold Assembly 49
P2LA, Accessorie Order Codes ..... 50 - 54
Manifold Dimensions..... 51 - 54
Solenoid Valves - 15mm..... 55
Solenoid Valves Order Key - 15mm..... 56
Solenoid Valves Technical Data - 15mm..... 57
Solenoid Valves - 22mm..... 58
Solenoid Valves Order Key - 22mm..... 59
Solenoid Valves Technical Data - 22mm..... 60 - 61
Solenoid Connectors + Cable Plugs..... 62 - 63
Service and Replacement Parts..... 63

Important !
Before carrying out any service work, ensure that the valve and manifold have been vented. Remove the primary supply air hose to ensure total disconnection of the air supply before dismantling valves or blank connection blocks.

NB !
All technical data in this catalogue is typical only.

The air quality is decisive for the valve life: see ISO 8573.

WARNING

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.
This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met. The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

SALE CONDITIONS

The items described in this document are available for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. Any sale contract entered into by Parker will be governed by the provisions stated in Parker's standard terms and conditions of sale (copy available upon request).

Extreme Environments

Demand The Viking Xtreme

The Viking Xtreme valve range is robust, versatile and combines high performance with compact installation dimensions. Large flow capacity, short change-over times and low change-over pressure are important characteristics of this valve range.

The 1/8 & 1/4 sizes are designed to operate with pressures up to 16 bar and the 3/8 & 1/2 sizes up to 12 bar, in ambient temperatures -40°C to + 60°C when fitted with suitable solenoid operators.

Manually operated range

The complete range includes lever operated versions . They feature a rugged hand lever specifically designed for gloved hands and are available in 3/2, 5/2 and 5/3 functions

Viking Xtreme range

P2LAX, dimension G1/8
P2LBX, dimension G1/4
P2LCX, dimension G3/8
P2LDX, dimension G1/2

Over-moulded single piece aluminium spool

- Reduced product complexity
- Increased flow
- Wide operating temperature range.
- Stable seal performance even with high flow/pressure drop across spool.

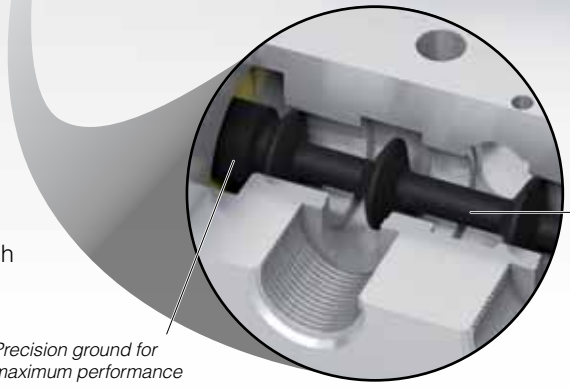

Whatever the environment, Push it to the Xtreme

Compact installation dimensions - flexible installation

Compact dimensions direct body porting and integral mounting holes are all features of the Viking Xtreme range. In addition to single valve installation, the Viking valve may be installed on manifolds so that the valves have a common supply and manifolded exhausts.

Mobile applications

The Viking Xtreme valves have a robust body which is machined out of solid aluminium bar and then anodised. Valves have passed aggressive salt spray, and demanding vibration tests and will operate in ambient temperatures of –40^{0}C to +60^{0}C. Solenoids are available having wide voltage tolerance for mobile applications.

Maintenance

The Viking Xtreme valve range has been developed from the very successful VGD15 and P2L-A product ranges which have a history of reliable and long service life in demanding and difficult applications. Spares kits are available for the valve and solenoid operators.

Manually operated versions

The range has now been extended to include lever operated versions. The rugged lever actuator has been specifically designed for gloved hands to suit mobile applications in the most arduous of environments.
Available in 3/2, 5/2 and 5/3 functions with either spring return or detented lever and with a choice of mid position function in the 5/3 versions. The lever actuated versions are available across the entire range of port sizes G1/8, G1/4, G3/8 and G1/2.

High reliability

Valves easily comply with the requirements for the component reliability in accordance with EU Machinery Directive standards EN292-2 and EN983. The valves have passed shocks & vibrations test IEC6173: 1999 cat 1 class B

The Viking Xtreme valves have few moving parts combined with short spool movement, these features combine to give valves having high reliability and long service life. The valves are designed for use with or without supplementary lubrication.

Rust and corrosion resistant designs.

Viking valves are made entirely of anodized aluminium, for good corrosion resistance. The smooth design, with no dirt-collecting pockets, makes the valve suitable for most environments, including applications with stringent hygiene requirements. The valve has stainless steel fixing screws for the end covers, to withstand aggressive environments.

Insensitive to dirty air

Thanks to large flow passage areas and the large flow diameter of 1.0 in the pilot valves, the P2LA and P2LB can be used in normal industrial or mobile environments without any problems of blocking. However the service life of the valve depends on the cleanliness of the air. Please refer to ISO 8573.
Valves having ATEX approval
ATEX approved options are available for use in explosive atmospheres. Consult our Technical Sales Department for further information.

Complete range

Manual, pneumatic, electric, 3/2, 5/2 & 5/3; the viking Xtreme valve range is suitable for a multiple application. For mobile or industrial applications, all functions are available from G1/8 to G1/2 using the same design and technology

Road

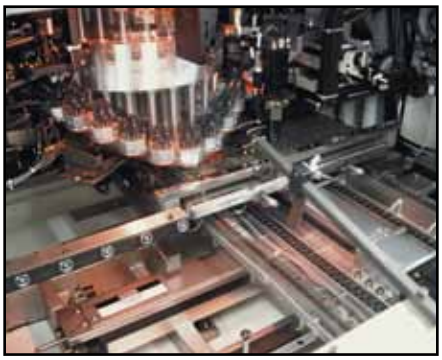

Industrial

Oil & Gas

Flexible multiple installation

There is a system of multiple installation plates, intermediate blocks and several variants of connectors for the P2LA. Several variants of connectors are available, which permit connection from above, beneath, straight from the side or in the middle of a valve block. Using the type L manifold, valve blocks may be constructed for supplying several different pressures.

Manifold bar installation

A manifold bar, with common ducts for ports 1, 3 and 5 gives simple, time saving and easily serviced installation. Manifold bars are available in several different sizes, with space for between 2 and 14 valves. They are designed for simple handling and are entirely serviced from the front.

Pressure bar installation

A pressure bar for common primary air supply gives a simple, robust, time saving and easily serviced installation. When pressure bars are used, restrictor-silencers can be installed in the exhaust ports of each valve, for individual adjustment of cylinder/air motor speed. Pressure bars are available in a number of different sizes, with space ranging from 2 to 10 valves.

Rail

Agri-Food

Forestry

Working medium, air quality

Working medium: Dry, filtered compressed air to ISO 8573-1 class 3.4.3.

Recommended air quality for valves

For best possible service life and trouble free operation, ISO 8573-1 quality class 3.4.3 should be used. This means 5µm filter (standard filter) dew point +3°C for indoor operation (a lower dew point should be selected for outdoor operation) and oil concentration 1.0 mg oil/m³, which is what a standard compressor with a standard filter gives.

ISO 8573-1 quality classes

Quality class	Pollution particle size (µm)	Pollution max. concentration (mg/m³)	Water max. press. dew point (°C)	Oil max. concentration (mg/m³)
1	0,1	0,1	-70	0,01
2	1	1	-40	0,1
3	5	5	-20	1,0
4	15	8	+3	5,0
5	40	10	+7	25
6	-	-	+10	-

Typical cylinders speeds which can be achieved with Viking valves and different tube sizes.

In the chart below you can find the suitable valves, tubes etc. for each cylinder size. If you have a tube length over 2 m, choose one tube size larger than in the chart.

Following data is valid:

Supply pressure : min 7,0 bar

Regulator pressure setting : 6,0 bar

Pipe length between air treatment unit and valve : max 1 m

Pipe length between valve and cylinder : max 2 m

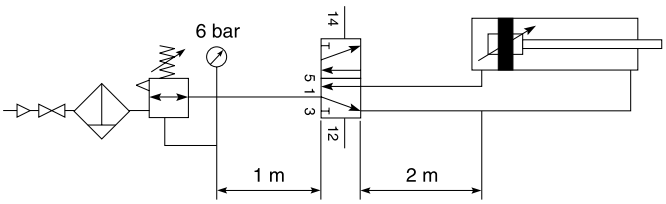

Cylinder bore	<20	20-32	40-50	63	80	100	125	160	200
Cylinder port	M5	G1/8	G1/4	G3/8	G3/8	G1/2	G1/2	G3/4	G3/4
Tubing Ext/Int	4/2.7	6/4	8/6	10/8	10/8	12/9	14/11	18/15	20/18
			6/4	8/6	12/9	14/11			
P2LAX	G1/8	G1/8	G1/8	G1/8	G1/8				
P2LBX	G1/4	G1/4	G1/4	G1/4	G1/4	G1/4			
P2LCX			G3/8	G3/8	G3/8	G3/8	G3/8		
P2LDX				G1/2	G1/2	G1/2	G1/2	G1/2	G1/2

Cylinder speed < 0,5 m/s

Cylinder speed < 1 m/s

Oversized

Cylinder speed > 1 m/s

Material specification

P2LAX

Valve

Valve body	Anodised aluminium
End covers	Anodised aluminium
Lever housing	Acetal plastic
Spool	Aluminium + nitrile rubber
Piston	Acetal plastic/ Anodised aluminium
End cover sealings	Nitrile rubber
End cover screws	Stainless steel
Springs	Dacromet® - processed steel, Stainless steel
Lever	Reinforced polyamid plastic
Panel mounting nut	Polycarbonate plastic
Gaiter	Chloroprene rubber
Mounting screws for solenoid	Stainless steel

Accessories

Manifold bar	Anodised aluminium
Pressure bar	Anodised aluminium
Multiple manifolds	Anodised aluminium
End and intermediate blocks	Anodised aluminium

P2LBX

Valve

Valve body	Anodised aluminium
End covers	Anodised aluminium
Lever housing	Anodised aluminium
Spool	Aluminium + nitrile rubber
Piston	Acetal plastic/ Anodised aluminium
End cover sealings	Nitrile rubber
End cover screws	Stainless steel
Springs	Dacromet® - processed steel, Stainless steel
Lever	Steel Zinc Plated
Gaiter	Chloroprene rubber
Mounting screws for solenoid	Stainless steel
Panel Washer	Nitrile
Twist Bush	Acetal
Helix Bush	Brass
Pin	Plated Steel
Twist Housing	Anodised Aluminium
Twist Knob	Polyamide 6
Panel mounting ring	Acetal
Lever Housings	Anodised Aluminium
Lever selector	Zinc Diecast

Accessories

Manifold bar	Anodised aluminium
Pressure bar	Anodised aluminium

P2LCX

Valve

Valve body	Anodised aluminium
End covers	Anodised aluminium
Spool	Aluminium + nitrile rubber
Piston	Acetal plastic/ Anodised aluminium
End cover sealings	Nitrile rubber
End cover screws	Stainless steel
Springs	Dacromet® - processed steel, Stainless steel
Lever	Steel Zinc Plated
Gaiter	Chloroprene rubber
Mounting screws for solenoid	Stainless steel

P2LDX

Valve

Valve body	Anodised aluminium
End covers	Anodised aluminium
Spool	Aluminium + nitrile rubber
Piston	Acetal plastic/ Anodised aluminium
End cover sealings	Nitrile rubber
End cover screws	Stainless steel
Springs	Dacromet® - processed steel, Stainless steel
Lever	Steel Zinc Plated
Gaiter	Chloroprene rubber
Mounting screws for solenoid	Stainless steel

Flow characteristics

Flow capacities in accordance with ISO6358
All pressures = effective pressure
The curves in the diagram below are typical only

Technical Data P2LAX

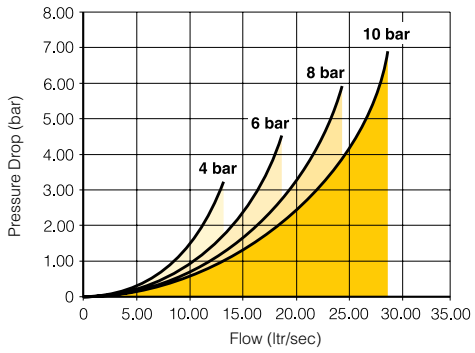

Port size	G1/8
Max operating pressure.	16 bar
Working temperature.	
Air pilot lever solenoid.	-40°C to + 60°C
Air pilot solenoid.	-10°C to + 50°C
Standard and food version.	-40°C to + 60°C
Mobile version.	-40°C to + 60°C
Flow (acc. to ISO 6358)	c = 3,0 Nl/s x bar b = 0,2 Qn = 11,0 l/s Qmax = 19,0 l/s Cv = 0,65

Technical Data P2LBX

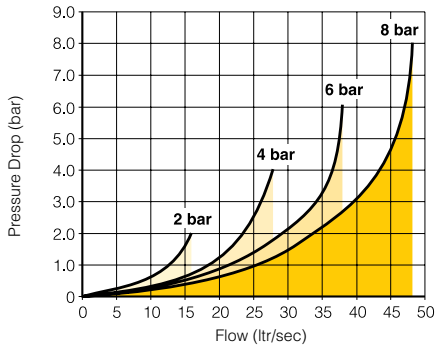

Port size	G1/4
Max operating pressure.	16 bar
Working temperature.	
Air pilot lever solenoid.	-40°C to + 60°C
Air pilot solenoid.	-10°C to + 50°C
Standard and food version.	-40°C to + 60°C
Mobile version.	-40°C to + 60°C
Flow (acc. to ISO 6358)	c = 5,4 Nl/s x bar b = 0,2 Qn = 21,5 l/s Qmax = 38,0 l/s Cv = 1,33

Technical Data P2LCX

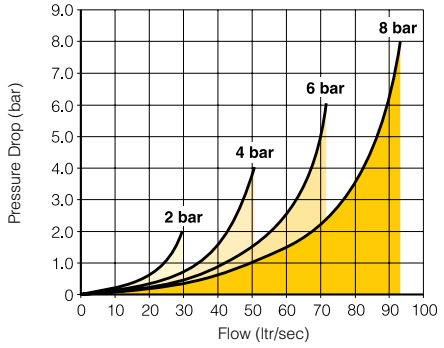

Port size	G3/8
Max operating pressure.	12 bar
Working temperature.	
Air pilot lever solenoid.	-40°C to + 60°C
Air pilot solenoid.	-10°C to + 50°C
Standard and food version.	-40°C to + 60°C
Mobile version.	-40°C to + 60°C
Flow (acc. to ISO 6358)	c = 10,3 Nl/s x bar b = 0,22 Qn = 41,0 l/s Qmax = 72,0 l/s Cv = 2,5

Technical Data P2LDX

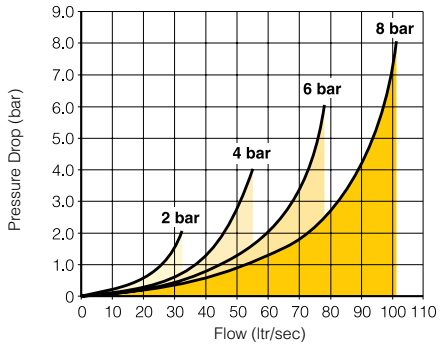

Port size	G1/2
Max operating pressure.	12 bar
Working temperature.	
Air pilot lever solenoid.	-40°C to + 60°C
Air pilot solenoid.	-10°C to + 50°C
Standard and food version.	-40°C to + 60°C
Mobile version.	-40°C to + 60°C
Flow (acc. to ISO 6358)	c = 11,3 Nl/s x bar b = 0,3 Qn = 44,3 l/s Qmax = 78 l/s Cv = 2,71

Order chart - Viking Xtreme air pilot & manual valves - Xtreme operating pressure / temperature

P	2	L	A	X	5	1	1	P	S

	Valve family
P2L	Viking inline valve

	Size
A	1/8
B	1/4
C	3/8
D	1/2

	Version
X	Xtreme duty spool

* Xtreme duty spool suitable for
max operating pressure
16 bar. (P2LAX + P2LBX) 12 bar (P2LCX + P2LDX)
Temperature range -40^{O}C to +60^{O}C

	Port thread
11	G1/8
12	G1/4
13	G3/8
14	G1/2
91	1/8 NPT
92	1/4 NPT
93	3/8 NPT
94	1/2 NPT
1N *	Namur G1/4
9N *	Namur 1/4 NPT

* Not available in 3/2 version

Valve type function		
Manual and pneumatic operated		
3		3/2 valve
5		5/2 valve
6		5/3 valve closed centre position
7		5/3 valve pressurised centre
8		5/3 valve vented centre

	Pilot main actuator/return
J ***	Rotary button - 2 positions
P	Air signal
S	Spring (return only)
V	Lever, 2 positions, 90^{O} to ports
Z ***	Lever, 2 positions, in line with ports
1 **	Lever, 3 positions self centred, 90^{O} to ports
2 **	Lever, held 3 positions, 90^{O} to ports
5 ***	Lever, 3 positions, self centered in line with port
6 ***	Lever, 3 positions, held in position in line with port
7 ***	Rotary button - 3 positions held in position

** Not available in 3/2 version

*** Only Available with port threads G1/4 and 1/4 NPT

Shaded part numbers are standard

Pneumatic pilot operated valves - Xtreme operating pressure / temperature

Max operating pressure 16 bar (A & B) 12 bar (C & D). temp range -40°C to +60°C

Symbol	Size	Actuation	Return	Min Operating Pressure (bar)	Changeover time (ms) at 6 bar @20°C actua./return	Weight Kg	Order code
3/2 valves, temperature -40°C to +60°C							
	G1/8	Air signal	Air signal	1,5	5/5	0,30	**P2LAX311PP**
	G1/4			1,5	5/5	0,30	**P2LBX312PP**
	G3/8			1,5	8/8	0,45	**P2LCX313PP**
	G1/2			1,5	9/9	0,45	**P2LDX314PP**
	G1/8	Air signal	Spring	3,2	8/15	0,30	**P2LAX311PS**
	G1/4			3,5	10/20	0,30	**P2LBX312PS**
	G3/8			3,5	10/30	0,45	**P2LCX313PS**
	G1/2			3,5	10/30	0,45	**P2LDX314PS**
5/2 valves, temperature -40°C to +60°C							
	G1/8	Air signal	Air signal	1,5	5/5	0,14	**P2LAX511PP**
	G1/4			1,5	6/6	0,30	**P2LBX512PP**
	G3/8			1,5	8/8	0,45	**P2LCX513PP**
	G1/2			1,5	9/9	0,45	**P2LDX514PP**
	G1/8	Air signal	Spring	3,2	8/15	0,15	**P2LAX511PS**
	G1/4			3,5	10/20	0,32	**P2LBX512PS**
	G3/8			3,5	10/30	0,45	**P2LCX513PS**
	G1/2			3,5	10/30	0,45	**P2LDX514PS**
5/3 valves, temperature -40°C to +60°C							
	G1/8	Air signal	Air signal	3,5	10/20	0,15	**P2LAX611PP**
	G1/4	Closed centre	Self	3,5	12/22	0,33	**P2LBX612PP**
	G3/8	position	centring	3,5	15/35	0,50	**P2LCX613PP**
	G1/2			3,5	15/35	0,50	**P2LDX614PP**
	G1/8	Air signal	Air signal	3,5	10/20	0,15	**P2LAX811PP**
	G1/4	Vented centre	Self	3,5	12/22	0,33	**P2LBX812PP**
	G3/8	position	centring	3,5	15/35	0,50	**P2LCX813PP**
	G1/2			3,5	15/35	0,50	**P2LDX814PP**
	G1/8	Air signal	Air signal	3,5	10/20	0,15	**P2LAX711PP**
	G1/4	Pressurised	Self	3,5	12/22	0,33	**P2LBX712PP**
	G3/8	centre	centring	3,5	15/35	0,50	**P2LCX713PP**
	G1/2	position		3,5	15/35	0,50	**P2LDX714PP**

Pneumatic twist operated valves - Xtreme operating pressure / temperature

Max operating pressure 16 bar. Temp range -40°C to +60°C

Symbol	Size	Actuation	Return	Changeover Angle	Weight Kg	Order code
3/2 valves, temperature -40°C to +60°C						
	G1/4	Twist	Twist	45	0.34	**P2LBX312JJ**
5/2 valves, temperature -40°C to +60°C						
	G1/4	Twist	Twist	45	0.37	**P2LBX512JJ**
5/3 valves, temperature -40°C to +60°C						
	G1/4	Twist	Twist	54	0.41	**P2LBX71277**
	G1/4	Twist	Twist	54	0.41	**P2LBX61277**
	G1/4	Twist	Twist	54	0.41	**P2LBX81277**

Lever operated directional control valves, lever 90° to ports

Max operating pressure 16 bar (A & B) 12 bar (C & D). temp range -40°C to +60°C

Symbol	Size	Actuation	Return	Changeover angle	Changeover Force	Type	Weight Kg	Order code
3/2 valves, standard temperature / Low temperature, lever 90° to ports								
	G1/8	Lever	Lever	20°	9 N	Std.	0,33	**P2LAX311VV**
	G1/4	Lever	Lever	20°	9 N	Std.	0,33	**P2LBX312VV**
	G3/8	Lever	Lever	32°	25 N	Std.	0,40	**P2LCX313VV**
	G1/2	Lever	Lever	32°	25 N	Std.	0,60	**P2LDX314VV**
	G1/8	Lever	Spring	20°	10N	Std.	0,33	**P2LAX311VS**
	G1/4	Lever	Spring	20°	10N	Std.	0,33	**P2LBX312VS**
	G3/8	Lever	Spring	32°	15 N	Std.	0,40	**P2LCX313VS**
	G1/2	Lever	Spring	32°	15 N	Std.	0,60	**P2LDX314VS**
5/2 valves, standard temperature / Low temperature, lever 90° to ports								
	G1/8	Lever	Lever	28°	9 N	Std.	0,18	**P2LAX511VV**
	G1/4	Lever	Lever	20°	9 N	Std.	0,33	**P2LBX512VV**
	G3/8	Lever	Lever	32°	25 N	Std.	0,40	**P2LCX513VV**
	G1/2	Lever	Lever	32°	25 N	Std.	0,60	**P2LDX514VV**
	G1/8	Lever	Spring	28°	10N	Std.	0,18	**P2LAX511VS**
	G1/4	Lever	Spring	20°	10N	Std.	0,33	**P2LBX512VS**
	G3/8	Lever	Spring	32°	15 N	Std.	0,40	**P2LCX513VS**
	G1/2	Lever	Spring	32°	15 N	Std.	0,60	**P2LDX514VS**
5/3 valves, low temperature, lever 90° to ports								
	G1/8	Lever	Lever	±14°	15 N	Std.	0,18	**P2LAX61122**
	G1/4	Closed centre position held in three positions		±12°	15 N	Std.	0,33	**P2LBX61222**
	G3/8			±16°	17 N	Std.	0,71	**P2LCX61322**
	G1/2			±16°	17 N	Std.	0,73	**P2LDX61422**
	G1/8	Lever	Lever	±14°	15 N	Std.	0,18	**P2LAX81122**
	G1/4	Exhausted centre position held in three positions		±12°	15 N	Std.	0,33	**P2LBX81222**
	G3/8			±16°	17 N	Std.	0,71	**P2LCX81322**
	G1/2			±16°	17 N	Std.	0,73	**P2LDX81422**
	G1/8	Lever	Lever	±14°	15 N	Std.	0,18	**P2LAX71122**
	G1/4	Pressure applied centre position held in three positions		±12°	15 N	Std.	0,33	**P2LBX71222**
	G3/8			±16°	17 N	Std.	0,71	**P2LCX71322**
	G1/2			±16°	17 N	Std.	0,73	**P2LDX71422**
	G1/8	Lever	Lever	±14°	16 N	Std.	0,18	**P2LAX61111**
	G1/4	Closed centre position Self centring		±12°	16 N	Std.	0,33	**P2LBX61211**
	G3/8			±16°	30 N	Std.	0,71	**P2LCX61311**
	G1/2			±16°	30 N	Std.	0,73	**P2LDX61411**
	G1/8	Lever	Lever	±14°	16 N	Std.	0,18	**P2LAX81111**
	G1/4	Exhausted centre position Self centring		±12°	16 N	Std.	0,33	**P2LBX81211**
	G3/8			±16°	30 N	Std.	0,71	**P2LCX81311**
	G1/2			±16°	30 N	Std.	0,73	**P2LDX81411**
	G1/8	Lever	Lever	±14°	16 N	Std.	0,18	**P2LAX71111**
	G1/4	Pressure applied centre position Self centring		±12°	16 N	Std.	0,33	**P2LBX71211**
	G3/8			±16°	30 N	Std.	0,71	**P2LCX71311**
	G1/2			±16°	30 N	Std.	0,73	**P2LDX71411**

Lever operated directional control valves, lever in line with ports

Max operating pressure 16 bar. Temp range -40°C to +60°C

Symbol	Size	Actuation	Return	Changeover angle	Changeover Force	Type	Weight Kg	Order code
3/2 valves, temperature -40°C to +60°C, Lever In Line with ports								
	G1/4	Lever	Lever	26°	18 N	Std.	0,42	**P2LBX312ZZ**
	G1/4	Lever	Spring	26°	18 N	Std.	0,42	**P2LBX312ZS**
5/2 valves, temperature -40°C to +60°C, Lever In Line with ports								
	G1/4	Lever	Lever	26°	18 N	Std.	0,45	**P2LBX512ZZ**
	G1/4	Lever	Spring	26°	18 N	Std.	0,45	**P2LBX512ZS**
5/3 valves, temperature -40°C to +60°C, Lever In Line with ports								
	Closed centre position self centering G1/4	Lever	Lever	15° / 15°	24 N	Std.	0,51	**P2LBX61255**
	Pressure applied centre position self centering G1/4	Lever	Lever	15° / 15°	24 N	Std.	0,51	**P2LBX71255**
	Exhausted centre position self centering G1/4	Lever	Lever	15° / 15°	24 N	Std.	0,51	**P2LBX81255**
	Closed centre position held in three positions G1/4	Lever	Lever	15° / 15°	18 N	Std.	0,48	**P2LBX61266**
	Pressure applied centre position held in three positions G1/4	Lever	Lever	15° / 15°	18 N	Std.	0,48	**P2LBX71266**
	Exhausted centre position held in three positions G1/4	Lever	Lever	15° / 15°	18 N	Std.	0,48	**P2LBX81266**

Order chart - Viking Xtreme Normal Operating Pressure / Temperature

P	2	L	A	X	5	1	1	E	S	N	D	D	B	4	9

	Valve family
P2L	Viking inline valve

	Size
A	1/8
B	1/4
C	3/8
D	1/2

	Version
X	Xtreme duty spool

	Port thread
11	G1/8
12	G1/4
13	G3/8
14	G1/2
91	1/8 NPT
92	1/4 NPT
93	3/8 NPT
94	1/2 NPT
1N *	Namur G1/4
9N *	Namur 1/4 NPT

* Namur version not available in 3/2 function

	Solenoid pilot type
N	10 bar / -10°C to 50°C
L**	10 bar / -10°C to 50°C

	Solenoid exhaust
D	Vented
N	Captured/tapped M5
X	15mm solenoid vented

Valve type function		
Solenoid operated with internal supply to solenoid		
3		3/2 valve
5		5/2 valve
6		5/3 valve closed centre position
7		5/3 valve pressurised centre
8		5/3 valve vented centre
Solenoid operated with external pilot supply to solenoids through ports 10 & 12 for 3/2 version and through ports 12 & 14 for 5/2 & 5/3 version		
L		3/2 valve
N		5/2 valve
P		5/3 valve closed centre position
Q		5/3 valve pressurised centre
R		5/3 valve vented centre

	Overrides
A*	None
B*	Flush - non locking
C	Flush - locking
D[1]	Extended non-locking
E*	Extended - locking
X	Less 15mm solenoid

* Only available with enclosure 5

[1] 22mm solenoid option

Voltage [2]			
	AC		DC
	60Hz	50Hz	
40	12		
42	24	22	
45			12
47*			12
48*			24
49			24
53	120	110	
57	240	230	
XX	valve less solenoid/coil		

* If 22mm solenoid required on mobile applications use model code no page 16. Alternatively check operating temperature and pressures with our technical department.

[2] Shaded part numbers are available from stock
Unshaded part numbers are available on request but will be subject to minimum order quantities
Otherwise order coil/solenoid and valve separately.

	Pilot main actuator / Return
E	Solenoid operated valve
S	Spring (return only)
P	Press (return only)

	Solenoid enclosure / Lead length
5	15mm, 3 pin Form C/ISO15217 in line with body
B	22mm 3-pin Industrial Form B with coil
N	22mm solenoid pilot less coil
X	Valve less 15mm solenoid
L**	Low power 22mm solenoid (only available with 24V DC)

Shaded part numbers are standard

Solenoid operated directional control valves fitted with 15mm solenoid(s) 24V DC

Solenoid plug/connector to ordered separately.

Internal supply to solenoid valve(s) via port 1. Max operating pressure 10 bar, temp range -10°C to +50°C

Symbol	Size	Actuation	Return	Min Operating Pressure (bar)	Changeover time (ms) at 6 bar @20°C actua./return	Weight Kg	Order code
3/2 valves, internal air, standard temperature							
	G1/8	Electric signal	Electric signal	1,5	10/10	0,42	**P2LAX311EENXB549**
	G1/4			1,5	10/12	0,42	**P2LBX312EENXB549**
	G3/8			1,5	17/17	0,53	**P2LCX313EENXB549**
	G1/2			1,5	17/17	0,53	**P2LDX314EENXB549**
	G1/8	Electric signal	Spring	3,2	18/40	0,38	**P2LAX311ESNXB549**
	G1/4			3,5	18/45	0,38	**P2LBX312ESNXB549**
	G3/8			3,5	25/75	0,50	**P2LCX313ESNXB549**
	G1/2			3,5	25/75	0,50	**P2LDX314ESNXB549**
5/2 valves, internal air, standard temperature							
	G1/8	Electric signal	Electric signal	1,5	10/10	0,27	**P2LAX511EENXB549**
	G1/4			1,5	12/12	0,42	**P2LBX512EENXB549**
	G3/8			1,5	17/17	0,53	**P2LCX513EENXB549**
	G1/2			1,5	17/17	0,53	**P2LDX514EENXB549**
	G1/8	Electric signal	Spring	3,2	15/35	0,22	**P2LAX511ESNXB549**
	G1/4			3,5	18/45	0,38	**P2LBX512ESNXB549**
	G3/8			3,5	25/75	0,50	**P2LCX513ESNXB549**
	G1/2			3,5	25/75	0,50	**P2LDX514ESNXB549**
5/3 valves, internal air, standard temperature							
	G1/8	Electric signal	Electric signal	3,5	18/40	0,28	**P2LAX611EENXB549**
	G1/4	Closed centre	Self	3,5	22/55	0,44	**P2LBX612EENXB549**
	G3/8	position	centring	3,5	30/90	0,55	**P2LCX613EENXB549**
	G1/2			3,5	30/95	0,55	**P2LDX614EENXB549**
	G1/8	Electric signal	Electric signal	3,5	18/40	0,28	**P2LAX811EENXB549**
	G1/4	Vented centre	Self	3,5	22/55	0,44	**P2LBX812EENXB549**
	G3/8	position	centring	3,5	30/90	0,55	**P2LCX813EENXB549**
	G1/2			3,5	30/95	0,55	**P2LDX814EENXB549**
	G1/8	Electric signal	Electric signal	3,5	18/40	0,28	**P2LAX711EENXB549**
	G1/4	Pressurised	Self	3,5	22/55	0,44	**P2LBX712EENXB549**
	G3/8	centre	centring	3,5	30/90	0,55	**P2LCX713EENXB549**
	G1/2	position		3,5	30/95	0,55	**P2LDX714EENXB549**

Solenoid operated directional control valves fitted with adapter to accept 15mm solenoid(s)

Solenoid operator(s) and connector/plug(s) should be ordered separately.

Internal supply to solenoid valve(s) via port 1. Max operating pressure 10 bar, temp range -10°C to +50°C

Symbol	Size	Actuation	Return	Min Operating Pressure (bar)	Changeover time (ms) at 6 bar @20°C actua./return	Weight Kg	Order code
3/2 valves, internal air, standard temperature							
	G1/8	Electric signal	Electric signal	1,5	10/10	0,38	**P2LAX311EENXXX**
	G1/4			1,5	10/12	0,38	**P2LBX312EENXXX**
	G3/8			1,5	17/17	0,45	**P2LCX313EENXXX**
	G1/2			1,5	17/17	0,45	**P2LDX314EENXXX**
	G1/8	Electric signal	Spring	3,2	18/40	0,38	**P2LAX311ESNXXX**
	G1/4			3,5	18/45	0,38	**P2LBX312ESNXXX**
	G3/8			3,5	25/75	0,42	**P2LCX313ESNXXX**
	G1/2			3,5	25/75	0,42	**P2LDX314ESNXXX**
5/2 valves, internal air, standard temperature							
	G1/8	Electric signal	Electric signal	1,5	10/10	0,27	**P2LAX511EENXXX**
	G1/4			1,5	12/12	0,42	**P2LBX512EENXXX**
	G3/8			1,5	17/17	0,45	**P2LCX513EENXXX**
	G1/2			1,5	17/17	0,45	**P2LDX514EENXXX**
	G1/8	Electric signal	Spring	3,2	15/35	0,22	**P2LAX511ESNXXX**
	G1/4			3,5	18/45	0,38	**P2LBX512ESNXXX**
	G3/8			3,5	25/75	0,42	**P2LCX513ESNXXX**
	G1/2			3,5	25/75	0,42	**P2LDX514ESNXXX**
5/3 valves, internal air, standard temperature							
	G1/8	Electric signal	Electric signal	3,5	18/40	0,28	**P2LAX611EENXXX**
	G1/4	Closed centre	Self	3,5	22/55	0,44	**P2LBX612EENXXX**
	G3/8	position	centring	3,5	30/90	0,55	**P2LCX613EENXXX**
	G1/2			3,5	30/95	0,55	**P2LDX614EENXXX**
	G1/8	Electric signal	Electric signal	3,5	18/40	0,28	**P2LAX811EENXXX**
	G1/4	Vented centre	Self	3,5	22/55	0,44	**P2LBX812EENXXX**
	G3/8	position	centring	3,5	30/90	0,55	**P2LCX813EENXXX**
	G1/2			3,5	30/95	0,55	**P2LDX814EENXXX**
	G1/8	Electric signal	Electric signal	3,5	18/40	0,28	**P2LAX711EENXXX**
	G1/4	Pressurised	Self	3,5	22/55	0,44	**P2LBX712EENXXX**
	G3/8	centre	centring	3,5	30/90	0,55	**P2LCX713EENXXX**
	G1/2	position		3,5	30/95	0,55	**P2LDX714EENXXX**

Solenoid operated directional control valves fitted with adapter to accept 15mm solenoid(s)

Solenoid operator(s) and connector/plug(s) should be ordered separately.

External supply to solenoid valve(s) via ports 10 & 12 for 3/2 version and via port 12 & 14 for 5/2 and 5/3 version.

Max operating pressure 10 bar, temp range -10°C to +50°C

Symbol	Size	Actuation	Return	Min Operating **Pressure** (bar)	**Changeover** time (ms) at 6 bar @20°C actua./return	**Weight** Kg	Order code
3/2 valves, external air, standard temperature							
	G1/8	Electric signal	Electric signal	1,5	10/10	0,34	**P2LAXL11EENXXX**
	G1/4			1,5	10/12	0,34	**P2LBXL12EENXXX**
	G3/8			1,5	17/17	0,45	**P2LCXL13EENXXX**
	G1/2			1,5	17/17	0,45	**P2LDXL14EENXXX**
	G1/8	Electric signal	Spring	3,2	18/40	0,34	**P2LAXL11ESNXXX**
	G1/4			3,5	18/45	0,34	**P2LBXL12ESNXXX**
	G3/8			3,5	25/75	0,42	**P2LCXL13ESNXXX**
	G1/2			3,5	25/75	0,42	**P2LDXL14ESNXXX**
5/2 valves, external air, standard temperature							
	G1/8	Electric signal	Electric signal	1,5	10/10	0,19	**P2LAXN11EENXXX**
	G1/4			1,5	12/12	0,34	**P2LBXN12EENXXX**
	G3/8			1,5	17/17	0,45	**P2LCXN13EENXXX**
	G1/2			1,5	17/17	0,45	**P2LDXN14EENXXX**
	G1/8	Electric signal	Spring	3,2	15/35	0,18	**P2LAXN11ESNXXX**
	G1/4			3,5	18/45	0,34	**P2LBXN12ESNXXX**
	G3/8			3,5	25/75	0,42	**P2LCXN13ESNXXX**
	G1/2			3,5	25/75	0,42	**P2LDXN14ESNXXX**
5/3 valves, external air, standard temperature							
	G1/8	Electric signal	Electric signal	3,5	18/40	0,20	**P2LAXP11EENXXX**
	G1/4	Closed centre	Self	3,5	22/55	0,36	**P2LBXP12EENXXX**
	G3/8	position	centring	3,5	30/90	0,55	**P2LCXP13EENXXX**
	G1/2			3,5	30/95	0,55	**P2LDXP14EENXXX**
	G1/8	Electric signal	Electric signal	3,5	18/40	0,20	**P2LAXR11EENXXX**
	G1/4	Vented centre	Self	3,5	22/55	0,36	**P2LBXR12EENXXX**
	G3/8	position	centring	3,5	30/90	0,55	**P2LCXR13EENXXX**
	G1/2			3,5	30/95	0,55	**P2LDXR14EENXXX**
	G1/8	Electric signal	Electric signal	3,5	18/40	0,20	**P2LAXQ11EENXXX**
	G1/4	Pressurised	Self	3,5	22/55	0,36	**P2LBXQ12EENXXX**
	G3/8	centre	centring	3,5	30/90	0,55	**P2LCXQ13EENXXX**
	G1/2	position		3,5	30/95	0,55	**P2LDXQ14EENXXX**

Solenoid operated directional control valves fitted with 22mm solenoid(s) 24V DC

Solenoid plug/connector to be ordered separately.

Internal supply to solenoid valve(s) via port 1. Max operating pressure 10 bar, Temperature range -10°C to +50°C

Symbol	Size	Actuation	Return	Min Operating Pressure (bar)	Changeover time (ms) at 6 bar @20°C actua./return	Weight Kg	Order code
3/2 valves, internal air, standard temperature							
	G1/8	Electric signal	Electric signal	1,5	10/10	0,42	**P2LAX311EENDDB49**
	G1/4			1,5	10/12	0,42	**P2LBX312EENDDB49**
	G3/8			1,5	17/17	0,81	**P2LCX313EENDDB49**
	G1/2			1,5	17/17	0,81	**P2LDX314EENDDB49**
	G1/8	Electric signal	Spring	3,2	18/40	0,38	**P2LAX311ESNDDB49**
	G1/4			3,5	18/45	0,38	**P2LBX312ESNDDB49**
	G3/8			3,5	25/75	0,76	**P2LCX313ESNDDB49**
	G1/2			3,5	25/75	0,76	**P2LDX314ESNDDB49**
5/2 valves, internal air, standard temperature							
	G1/8	Electric signal	Electric signal	1,5	10/10	0,27	**P2LAX511EENDDB49**
	G1/4			1,5	12/12	0,42	**P2LBX512EENDDB49**
	G3/8			1,5	17/17	0,81	**P2LCX513EENDDB49**
	G1/2			1,5	17/17	0,81	**P2LDX514EENDDB49**
	G1/8	Electric signal	Spring	3,2	15/35	0,22	**P2LAX511ESNDDB49**
	G1/4			3,5	18/45	0,38	**P2LBX512ESNDDB49**
	G3/8			3,5	27/75	0,76	**P2LCX513ESNDDB49**
	G1/2			3,5	25/75	0,76	**P2LDX514ESNDDB49**
5/3 valves, internal air, standard temperature							
	G1/8	Electric signal	Electric signal	3,5	18/40	0,28	**P2LAX611EENDDB49**
	G1/4	Closed centre	Self	3,5	22/55	0,44	**P2LBX612EENDDB49**
	G3/8	position	centring	3,5	30/90	1,11	**P2LCX613EENDDB49**
	G1/2			3,5	30/90	1,11	**P2LDX614EENDDB49**
	G1/8	Electric signal	Electric signal	3,5	18/40	0,28	**P2LAX811EENDDB49**
	G1/4	Vented centre	Self	3,5	22/45	0,44	**P2LBX812EENDDB49**
	G3/8	position	centring	3,5	30/90	1,11	**P2LCX813EENDDB49**
	G1/2			3,5	30/90	1,11	**P2LDX814EENDDB49**
	G1/8	Electric signal	Electric signal	3,5	18/40	0,28	**P2LAX711EENDDB49**
	G1/4	Pressurised	Self	3,5	22/45	0,44	**P2LBX712EENDDB49**
	G3/8	centre	centring	3,5	30/90	1,11	**P2LCX713EENDDB49**
	G1/2	position		3,5	30/90	1,11	**P2LDX714EENDDB49**

Solenoid operated directional control valves (supplied with 22mm solenoid operator less coil)

Solenoid plug/connector to be ordered separately.

Internal supply to solenoid valve(s) via port 1.

Symbol	Size	Actuation	Return	Min Operating **Pressure** (bar)	**Changeover** time (ms) at 6 bar @20°C actua./return	**Weight** Kg	**Order code**
3/2 valves, internal air, standard temperature							
	G1/8	Electric signal	Electric signal	1,5	10/10	0,31	**P2LAX311EENDDN**
	G1/4			1,5	10/12	0,31	**P2LBX312EENDDN**
	G3/8			1,5	17/17	0,41	**P2LCX313EENDDN**
	G1/2			1,5	17/17	0,41	**P2LDX314EENDDN**
	G1/8	Electric signal	Spring	3,2	18/40	0,31	**P2LAX311ESNDDN**
	G1/4			3,5	18/45	0,31	**P2LBX312ESNDDN**
	G3/8			3,5	25/75	0,40	**P2LCX313ESNDDN**
	G1/2			3,5	25/75	0,40	**P2LDX314ESNDDN**
5/2 valves, internal air, standard temperature							
	G1/8	Electric signal	Electric signal	1,5	9/9	0,16	**P2LAX511EENDDN**
	G1/4			1,5	10/10	0,31	**P2LBX512EENDDN**
	G3/8			1,5	13/13	0,41	**P2LCX513EENDDN**
	G1/2			1,5	13/13	0,41	**P2LDX514EENDDN**
	G1/8	Electric signal	Spring	3,2	12/38	0,16	**P2LAX511ESNDDN**
	G1/4			3,5	14/42	0,31	**P2LBX512ESNDDN**
	G3/8			3,5	16/60	0,40	**P2LCX513ESNDDN**
	G1/2			3,5	16/60	0,40	**P2LDX514ESNDDN**
5/3 valves, internal air, standard temperature							
	G1/8	Electric signal	Electric signal	3,5	15/40	0,17	**P2LAX611EENDDN**
	G1/4	Closed centre	Self	3,5	18/50	0,33	**P2LBX612EENDDN**
	G3/8	position	centring	3,5	20/65	1,00	**P2LCX613EENDDN**
	G1/2			3,5	20/70	1,00	**P2LDX614EENDDN**
	G1/8	Electric signal	Electric signal	3,5	15/40	0,17	**P2LAX811EENDDN**
	G1/4	Vented centre	Self	3,5	18/50	0,33	**P2LBX812EENDDN**
	G3/8	position	centring	3,5	20/65	1,00	**P2LCX813EENDDN**
	G1/2			3,5	20/70	1,00	**P2LDX814EENDDN**
	G1/8	Electric signal	Electric signal	3,5	15/40	0,17	**P2LAX711EENDDN**
	G1/4	Pressurised	Self	3,5	18/50	0,33	**P2LBX712EENDDN**
	G3/8	centre	centring	3,5	20/65	1,00	**P2LCX713EENDDN**
	G1/2	position		3,5	20/70	1,00	**P2LDX714EENDDN**

Solenoid operated directional control valves (supplied with 22mm solenoid less coil)

Solenoid plug/connector to be ordered separately.

External supply to solenoid valve(s) via ports 10 & 12 for 3/2 version and via port 12 & 14 for 5/2 and 5/3 version
Standard temp range -10°C to +50°C. Max operating pressure 10 bar

Symbol	Size	Actuation	Return	Min Operating Pressure (bar)	Changeover time (ms) at 6 bar @20°C actua./return	Weight Kg	Order code
3/2 valves, external air, standard temperature							
	G1/8	Electric signal	Electric signal	1,5	10/10	0,31	**P2LAXL11EENDDN**
	G1/4			1,5	10/12	0,31	**P2LBXL12EENDDN**
	G3/8			1,5	17/17	0,70	**P2LCXL13EENDDN**
	G1/2			1,5	17/17	0,70	**P2LDXL14EENDDN**
	G1/8	Electric signal	Spring	3,2	18/40	0,30	**P2LAXL11ESNDDN**
	G1/4			3,5	18/45	0,30	**P2LBXL12ESNDDN**
	G3/8			3,5	25/75	0,70	**P2LCXL13ESNDDN**
	G1/2			3,5	25/75	0,70	**P2LDXL14ESNDDN**
5/2 valves, external air, standard temperature							
	G1/8	Electric signal	Electric signal	1,5	9/9	0,16	**P2LAXN11EENDDN**
	G1/4			1,5	10/10	0,31	**P2LBXN12EENDDN**
	G3/8			1,5	13/13	0,70	**P2LCXN13EENDDN**
	G1/2			1,5	13/13	0,70	**P2LDXN14EENDDN**
	G1/8	Electric signal	Spring	3,2	12/38	0,16	**P2LAXN11ESNDDN**
	G1/4			3,5	14/42	0,30	**P2LBXN12ESNDDN**
	G3/8			3,5	16/60	0,70	**P2LCXN13ESNDDN**
	G1/2			3,5	16/60	0,70	**P2LDXN14ESNDDN**
5/3 valves, external air, standard temperature							
	G1/8	Electric signal	Electric signal	3,5	15/40	0,17	**P2LAXP11EENDDN**
	G1/4	Closed centre	Self	3,5	18/50	0,33	**P2LBXP12EENDDN**
	G3/8	position	centring	3,5	20/65	1,00	**P2LCXP13EENDDN**
	G1/2			3,5	20/70	1,00	**P2LDXP14EENDDN**
	G1/8	Electric signal	Electric signal	3,5	15/40	0,17	**P2LAXR11EENDDN**
	G1/4	Vented centre	Self	3,5	18/50	0,33	**P2LBXR12EENDDN**
	G3/8	position	centring	3,5	20/65	1,00	**P2LCXR13EENDDN**
	G1/2			3,5	20/70	1,00	**P2LDXR14EENDDN**
	G1/8	Electric signal	Electric signal	3,5	15/40	0,17	**P2LAXQ11EENDDN**
	G1/4	Pressurised	Self	3,5	18/50	0,33	**P2LBXQ12EENDDN**
	G3/8	centre	centring	3,5	20/65	1,00	**P2LCXQ13EENDDN**
	G1/2	position		3,5	20/70	1,00	**P2LDXQ14EENDDN**

Order chart - Viking Xtreme Valves - Xtreme operating pressure / temperature

P	2	L	A	X	5	1	1	E	S	H	D	D	B	4	9

	Valve family
P2L	Viking inline valve

	Size
A	1/8
B	1/4
C	3/8
D	1/2

	Version
X	Xtreme duty spool

	Port thread
11	G1/8
12	G1/4
13	G3/8
14	G1/2
91	1/8 NPT
92	1/4 NPT
93	3/8 NPT
94	1/2 NPT

	Solenoid pilot type
H[1]	16 bar / -40°C to 60°C

[1] Solenoid operated 'H' version supplied with B type enclosure 16 bar solenoid

	Solenoid exhaust
D	Vented
N	Capture/tapped M5

Valve type function		
Solenoid operated with internal supply to solenoid		
3		3/2 valve
5		5/2 valve
6		5/3 valve closed centre position
7		5/3 valve pressurised centre
8		5/3 valve vented centre
Solenoid operated with external pilot supply to solenoids through ports 10 & 12 for 3/2 version and through ports 12 & 14 for 5/2 & 5/3 version		
L		3/2 valve
N		5/2 valve
P		5/3 valve closed centre position
Q		5/3 valve pressurised centre
R		5/3 valve vented centre

	Overrides
D	Extended non-locking

Voltage [3]			
	AC		DC
	60Hz	50Hz	
40	12		
42	24	22	
45			12
47*			12
48*			24
49			24
53	120	110	
57	240	230	
72			110
XX	valve less solenoid/coil		

* Mobile voltage see page 51 operating parameters

[3] Shaded part numbers are available from stock
Unshaded part numbers are available on request but will be subject to minimum order quantities
Otherwise order coil and valve separately.

	Pilot main actuator / Return
E	Solenoid operated valve
S	Spring (return only)
P	Press (return only)

	Solenoid enclosure / Lead length
A	22mm Solenoid pilot & 30mm coil Form A
B	22mm Solenoid pilot & 22mm coil Industrial Form B
N	22mm Solenoid pilot less coil

Shaded part numbers are standard

Solenoid operated directional control valves - Xtreme duty -40°C to +60°C
P2LAX/P2LBX - 16 bar, P2LCX/P2LDX - 12 bar

Complete with 22mm solenoid and 24V DC coil.

Internal supply to solenoid valve(s) via port 1. Connector/cable plugs to be ordered separately.

Symbol	Size	Actuation	Return	Min Operating Pressure (bar)	Changeover time (ms) at 6 bar @20°C actua./return	Weight Kg	Order code
3/2 valves, internal air, low temperature							
	G1/8	Electric signal	Electric signal	1,5	11/11	0,42	**P2LAX311EEHDDB49**
	G1/4		Low temp.	1,5	13/13	0,42	**P2LBX312EEHDDB49**
	G3/8			1,5	18/18	0,48	**P2LCX313EEHDDB49**
	G1/2			1,5	18/18	0,48	**P2LDX314EEHDDB49**
	G1/8	Electric signal	Spring	3,2	15/45	0,38	**P2LAX311ESHDDB49**
	G1/4		Low temp.	3,5	25/65	0,38	**P2LBX312ESHDDB49**
	G3/8			3,5	25/85	0,46	**P2LCX313ESHDDB49**
	G1/2			3,5	25/85	0,46	**P2LDX314ESHDDB49**
5/2 valves, internal air, low temperature							
	G1/8	Electric signal	Electric signal	1,5	11/11	0,27	**P2LAX511EEHDDB49**
	G1/4		Low temp.	1,5	13/13	0,42	**P2LBX512EEHDDB49**
	G3/8			1,5	18/18	0,48	**P2LCX513EEHDDB49**
	G1/2			1,5	18/18	0,48	**P2LDX514EEHDDB49**
	G1/8	Electric signal	Spring	3,2	15/45	0,22	**P2LAX511ESHDDB49**
	G1/4		Low temp.	3,2	20/55	0,38	**P2LBX512ESHDDB49**
	G3/8			3,2	25/85	0,46	**P2LCX513ESHDDB49**
	G1/2			3,2	25/85	0,46	**P2LDX514ESHDDB49**
5/3 valves, internal air, low temperature							
	G1/8	Electric signal	Electric signal	3,5	18/50	0,28	**P2LAX611EEHDDB49**
	G1/4	Closed centre	Self	3,5	25/65	0,45	**P2LBX612EEHDDB49**
	G3/8	position	centring	3,5	30/90	0,55	**P2LCX613EEHDDB49**
	G1/2		Low temp.	3,5	30/95	0,55	**P2LDX614EEHDDB49**
	G1/8	Electric signal	Electric signal	3,5	18/50	0,28	**P2LAX811EEHDDB49**
	G1/4	Vented centre	Self	3,5	25/65	0,45	**P2LBX812EEHDDB49**
	G3/8	position	centring	3,5	30/90	0,55	**P2LCX813EEHDDB49**
	G1/2		Low temp.	3,5	30/95	0,55	**P2LDX814EEHDDB49**
	G1/8	Electric signal	Electric signal	3,5	18/50	0,28	**P2LAX711EEHDDB49**
	G1/4	Pressurised	Self	3,5	25/65	0,45	**P2LBX712EEHDDB49**
	G3/8	centre	centring	3,5	30/90	0,55	**P2LCX713EEHDDB49**
	G1/2	position	Low temp.	3,5	30/95	0,55	**P2LDX714EEHDDB49**

Solenoid operated directional control valves - Xtreme duty -40°C to +60°C
P2LAX/P2LBX - 16 bar, P2LCX/P2LDX - 12 bar

Valves fitted with 22mm solenoid operator(s) less coil(s). Order coils and plug/connectors separately
Internal supply to solenoid valve(s) via port 1. Connector/cable plugs to be ordered separately.

Symbol	Size	Actuation	Return	Min Operating **Pressure** (bar)	**Changeover** time (ms) at 6 bar @20°C actua./return	**Weight** Kg	Order code
3/2 valves, internal air, low temperature							
	G1/8	Electric signal	Electric signal	1,5	11/11	0,31	**P2LAX311EEHDDN**
	G1/4			1,5	13/13	0,31	**P2LBX312EEHDDN**
	G3/8			1,5	18/18	0,41	**P2LCX313EEHDDN**
	G1/2			1,5	18/18	0,41	**P2LDX314EEHDDN**
	G1/8	Electric signal	Spring	3,2	15/45	0,31	**P2LAX311ESHDDN**
	G1/4			3,5	25/65	0,31	**P2LBX312ESHDDN**
	G3/8			3,5	25/85	0,40	**P2LCX313ESHDDN**
	G1/2			3,5	25/85	0,40	**P2LDX314ESHDDN**
5/2 valves, internal air, low temperature							
	G1/8	Electric signal	Electric signal	1,5	11/11	0,16	**P2LAX511EEHDDN**
	G1/4			1,5	13/13	0,31	**P2LBX512EEHDDN**
	G3/8			1,5	18/18	0,41	**P2LCX513EEHDDN**
	G1/2			1,5	18/18	0,41	**P2LDX514EEHDDN**
	G1/8	Electric signal	Spring	3,2	15/45	0,16	**P2LAX511ESHDDN**
	G1/4			3,2	20/55	0,31	**P2LBX512ESHDDN**
	G3/8			3,2	25/85	0,40	**P2LCX513ESHDDN**
	G1/2			3,2	25/85	0,40	**P2LDX514ESHDDN**
5/3 valves, internal air, low temperature							
	G1/8	Electric signal	Electric signal	3,5	18/50	0,17	**P2LAX611EEHDDN**
	G1/4	Closed centre	Self	3,5	25/65	0,33	**P2LBX612EEHDDN**
	G3/8	position	centring	3,5	30/90	0,42	**P2LCX613EEHDDN**
	G1/2			3,5	30/95	0,42	**P2LDX614EEHDDN**
	G1/8	Electric signal	Electric signal	3,5	18/50	0,17	**P2LAX811EEHDDN**
	G1/4	Vented centre	Self	3,5	25/65	0,33	**P2LBX812EEHDDN**
	G3/8	position	centring	3,5	30/90	0,42	**P2LCX813EEHDDN**
	G1/2			3,5	30/95	0,42	**P2LDX814EEHDDN**
	G1/8	Electric signal	Electric signal	3,5	18/50	0,17	**P2LAX711EEHDDN**
	G1/4	Pressurised	Self	3,5	25/65	0,33	**P2LBX712EEHDDN**
	G3/8	centre	centring	3,5	30/90	0,42	**P2LCX713EEHDDN**
	G1/2	position		3,5	30/95	0,42	**P2LDX714EEHDDN**

Solenoid operated directional control valves - Xtreme duty -40°C to + 60°C
P2LAX/P2LBX - 16 bar, P2LCX/P2LDX - 12 bar

Valves fitted with 22mm solenoid operator(s) less coil(s). Order coils and plug/connectors separately
External supply to solenoid valve(s) via ports 10 & 12 for 3/2 version and via port 12 & 14 for 5/2 and 5/3 version

Symbol	Size	Actuation	Return	Min Operating Pressure (bar)	Changeover time (ms) at 6 bar @20°C actua./return	Weight Kg	Order code
3/2 valves, external air standard temperature							
	G1/8	Electric signal	Electric signal	1,5	10/10	0,42	**P2LAXL11EEHDDN**
	G1/4			1,5	10/12	0,42	**P2LBXL12EEHDDN**
	G3/8			1,5	17/17	0,81	**P2LCXL13EEHDDN**
	G1/2			1,5	17/17	0,81	**P2LDXL14EEHDDN**
	G1/8	Electric signal	Spring	3,2	18/40	0,42	**P2LAXL11ESHDDN**
	G1/4			3,5	18/45	0,42	**P2LBXL12ESHDDN**
	G3/8			3,5	25/75	0,76	**P2LCXL13ESHDDN**
	G1/2			3,5	25/75	0,76	**P2LDXL14ESHDDN**
5/2 valves, external air to pilot operators							
	G1/8	Electric signal	Electric signal	1,5	11/11	0,27	**P2LAXN11EEHDDN**
	G1/4			1,5	13/13	0,42	**P2LBXN12EEHDDN**
	G3/8			1,5	18/18	0,81	**P2LCXN13EEHDDN**
	G1/2			1,5	18/18	0,81	**P2LDXN14EEHDDN**
	G1/8	Electric signal	Spring	3,2	15/45	0,22	**P2LAXN11ESHDDN**
	G1/4			3,2	20/55	0,38	**P2LBXN12ESHDDN**
	G3/8			3,2	25/85	0,76	**P2LCXN13ESHDDN**
	G1/2			3,2	25/85	0,76	**P2LDXN14ESHDDN**
5/3 valves, external air to pilot operators							
	G1/8	Electric signal	Electric signal	3,5	18/50	0,28	**P2LAXP11EEHDDN**
	G1/4	Closed centre	Self	3,5	25/65	0,44	**P2LBXP12EEHDDN**
	G3/8	position	centring	3,5	30/90	1,11	**P2LCXP13EEHDDN**
	G1/2			3,5	30/95	1,11	**P2LDXP14EEHDDN**
	G1/8	Electric signal	Electric signal	3,5	18/50	0,28	**P2LAXR11EEHDDN**
	G1/4	Vented centre	Self	3,5	25/65	0,44	**P2LBXR12EEHDDN**
	G3/8	position	centring	3,5	30/90	1,11	**P2LCXR13EEHDDN**
	G1/2			3,5	30/95	1,11	**P2LDXR14EEHDDN**
	G1/8	Electric signal	Electric signal	3,5	18/50	0,28	**P2LAXQ11EEHDDN**
	G1/4	Pressurised	Self	3,5	25/65	0,44	**P2LBXQ12EEHDDN**
	G3/8	centre	centring	3,5	30/90	1,11	**P2LCXQ13EEHDDN**
	G1/2	position		3,5	30/95	1,11	**P2LDXQ14EEHDDN**

Dimensions

P2LAX... all
3/2 valves

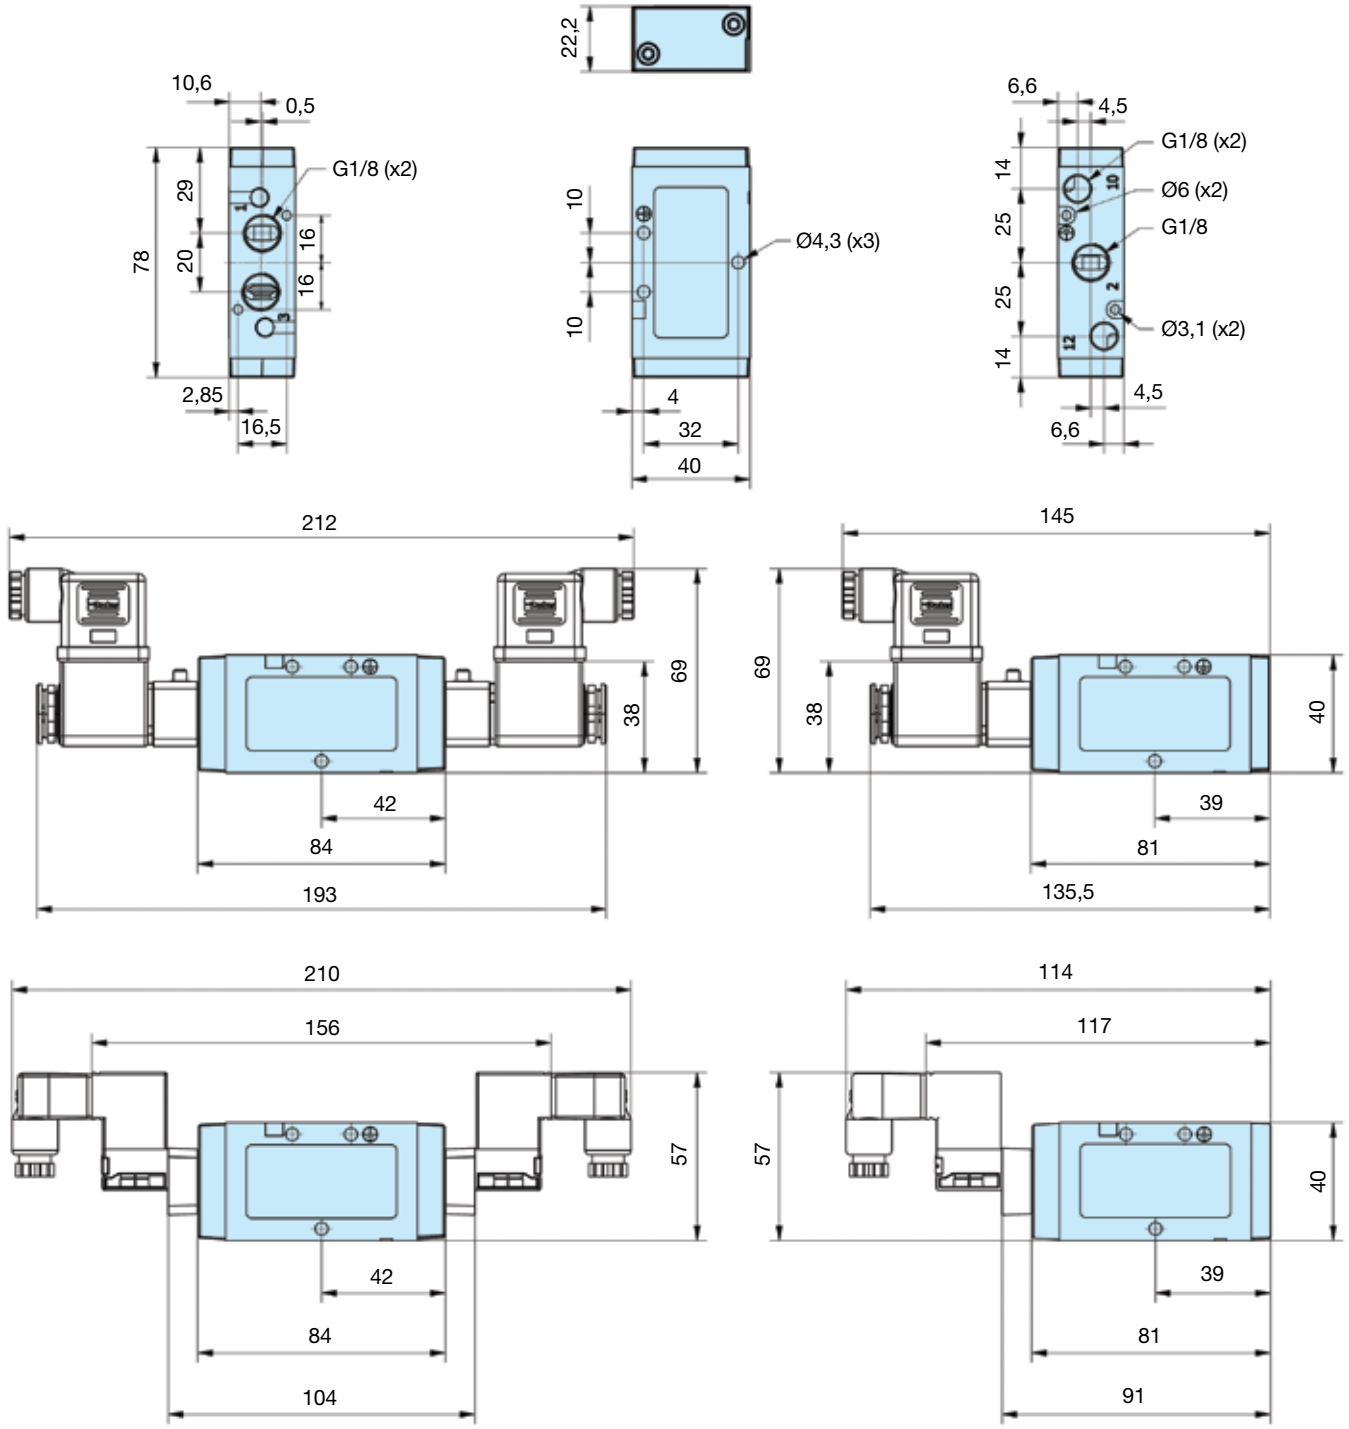

Solenoid valves
Cable plugs must be ordered separately.
One pilot valve is required for each E in the valve order code.

Dimensions

P2LAX... all
5/2 and 5/3 valves

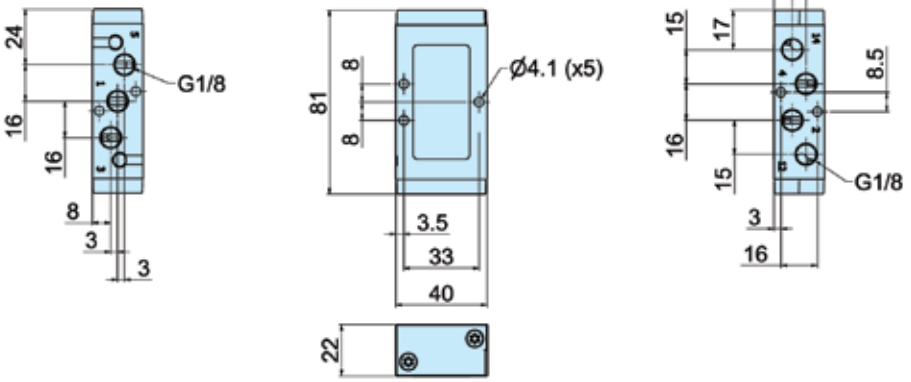

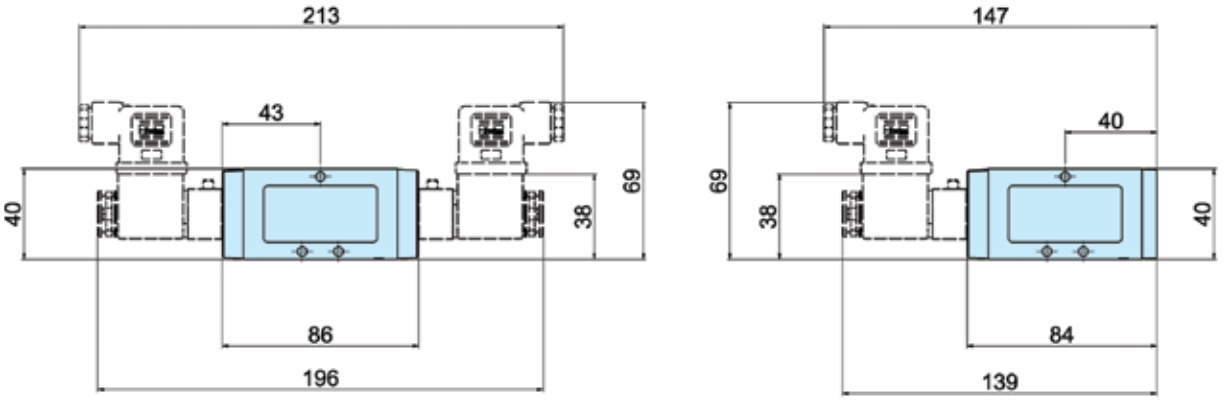

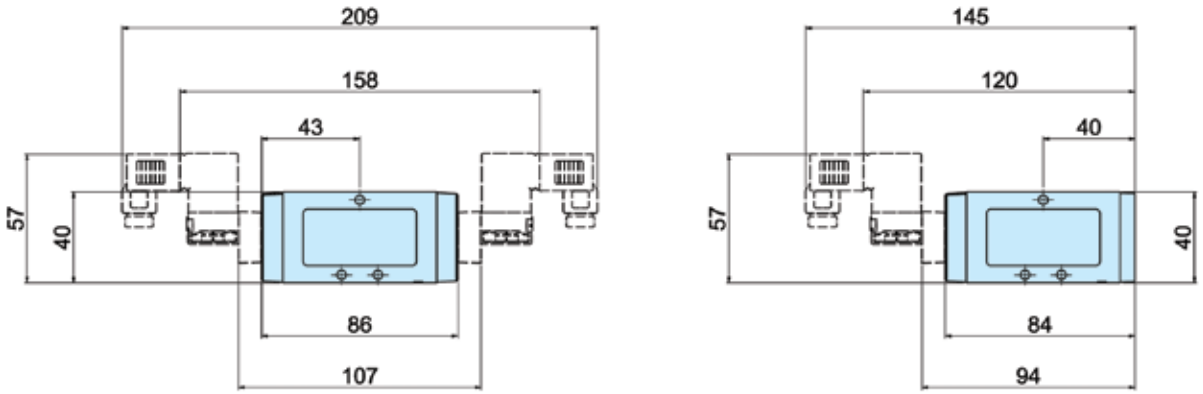

Solenoid valves
Cable plugs must be ordered separately.
One pilot valve is required for each E in the valve order code.

Dimensions

P2LAX - 3/2 Lever operated directional control valves

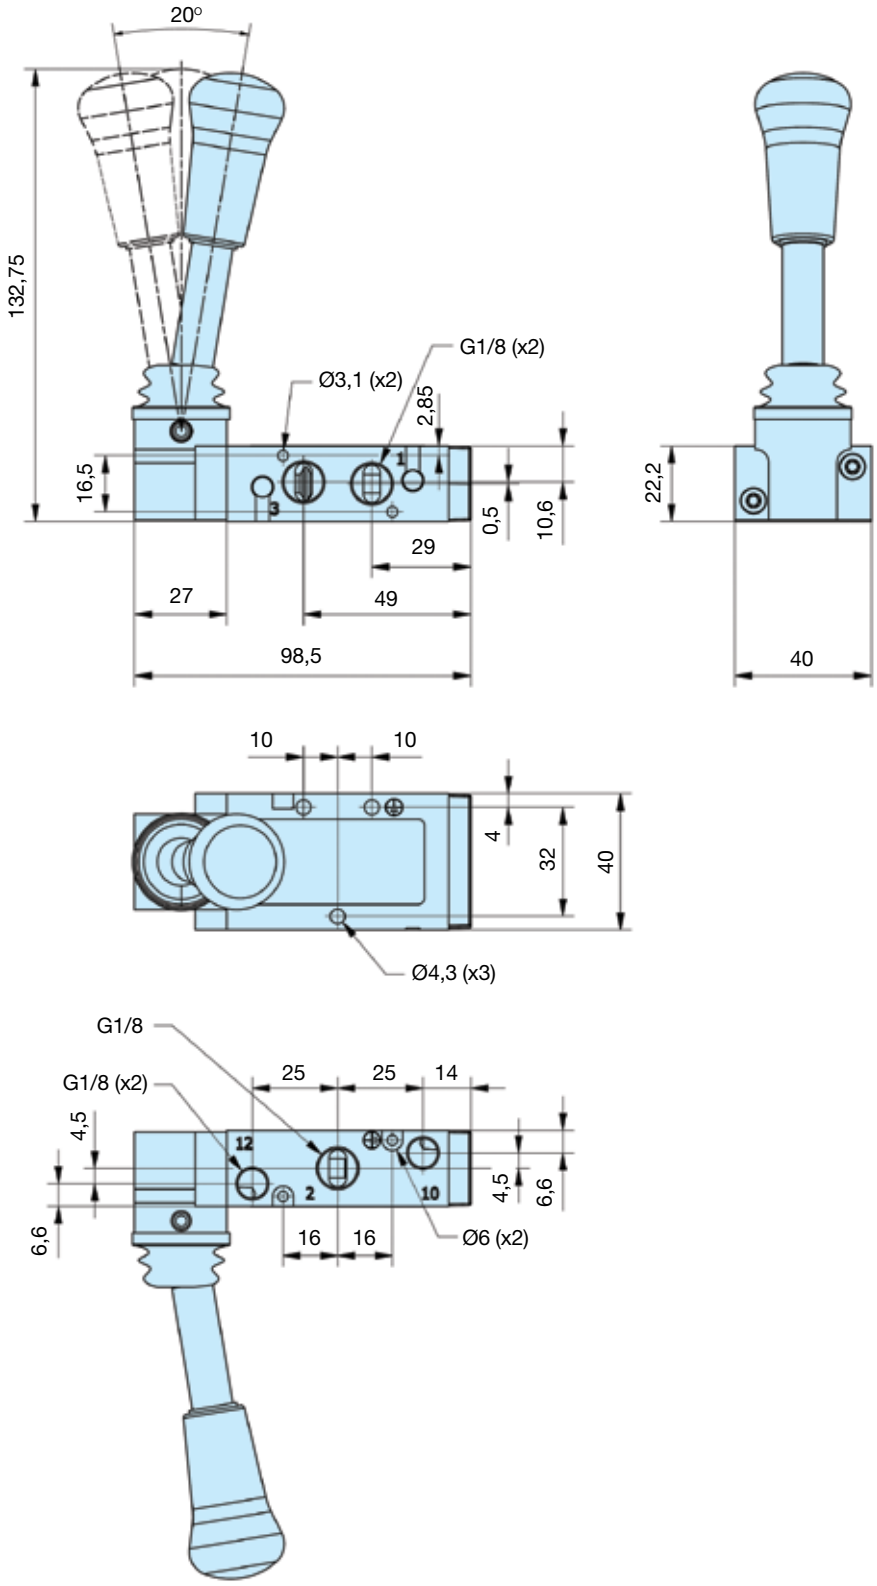

Dimensions

P2LAX - 5/2 & 5/3 Lever operated directional control valves

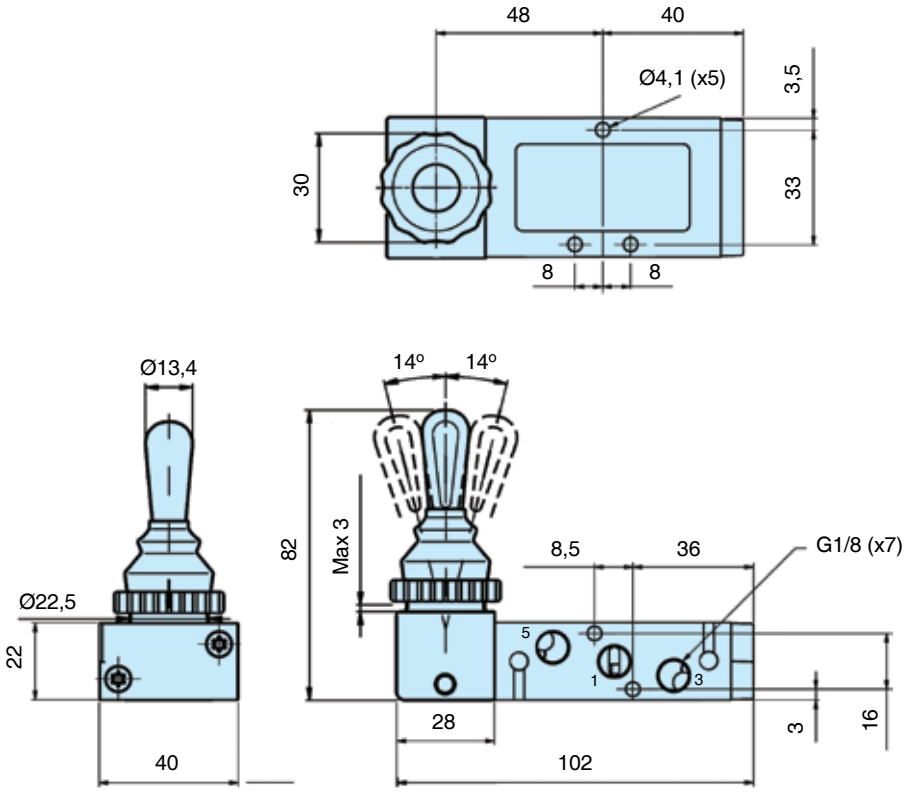

Dimensions

P2LBX - 3/2 Lever operated directional control valves

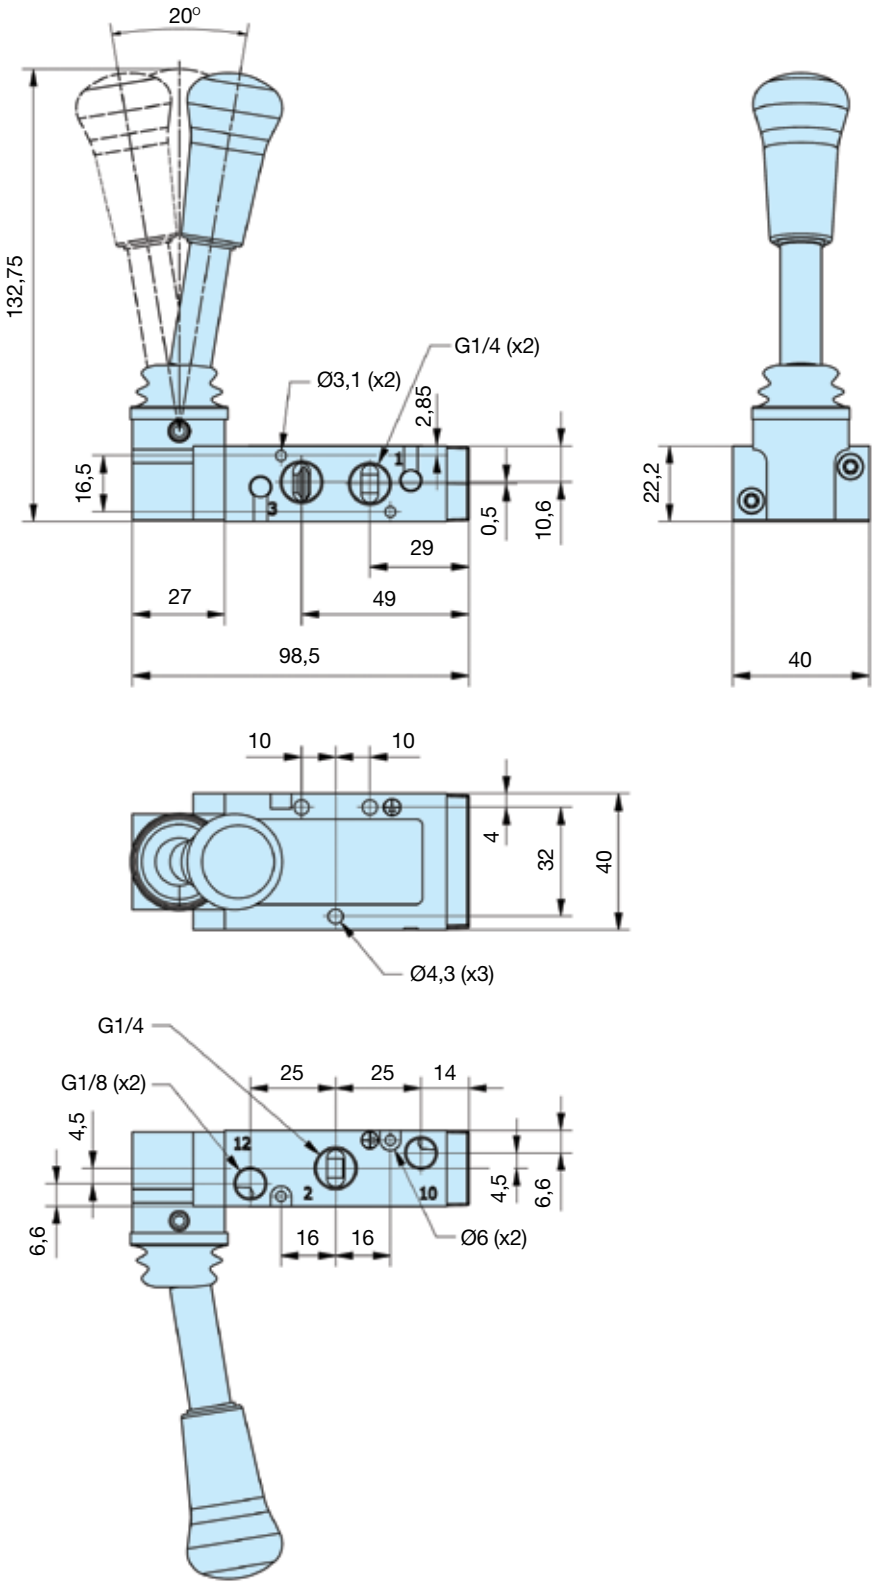

Dimensions

P2LBX - 5/2 Lever operated directional control valves

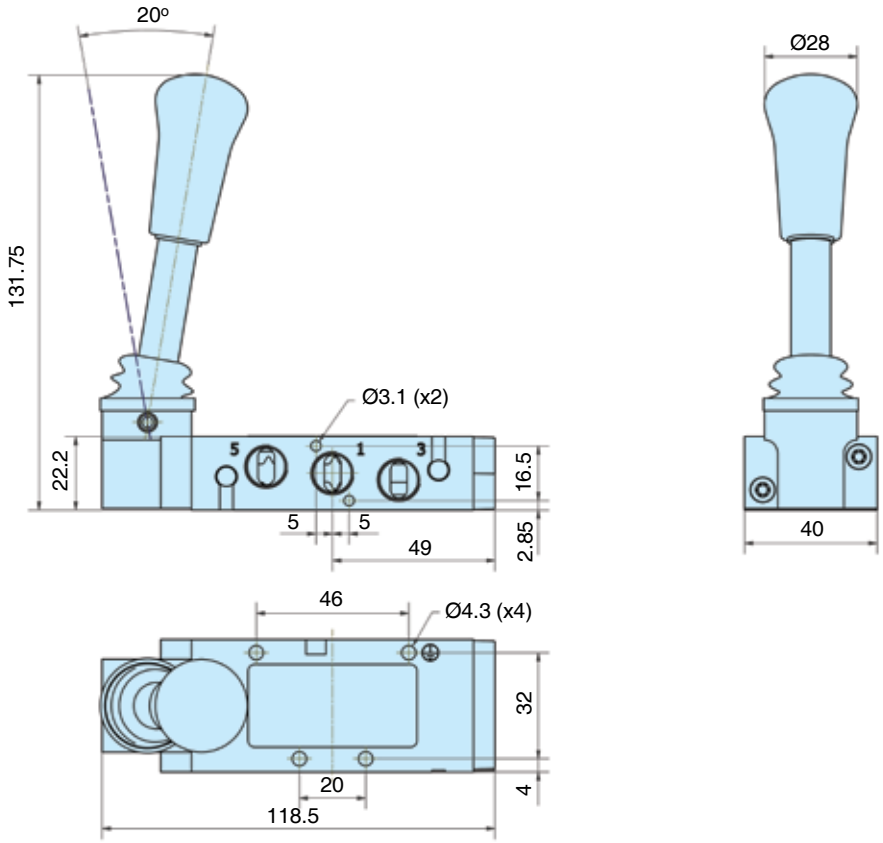

P2LBX - 5/3 Lever operated directional control valves

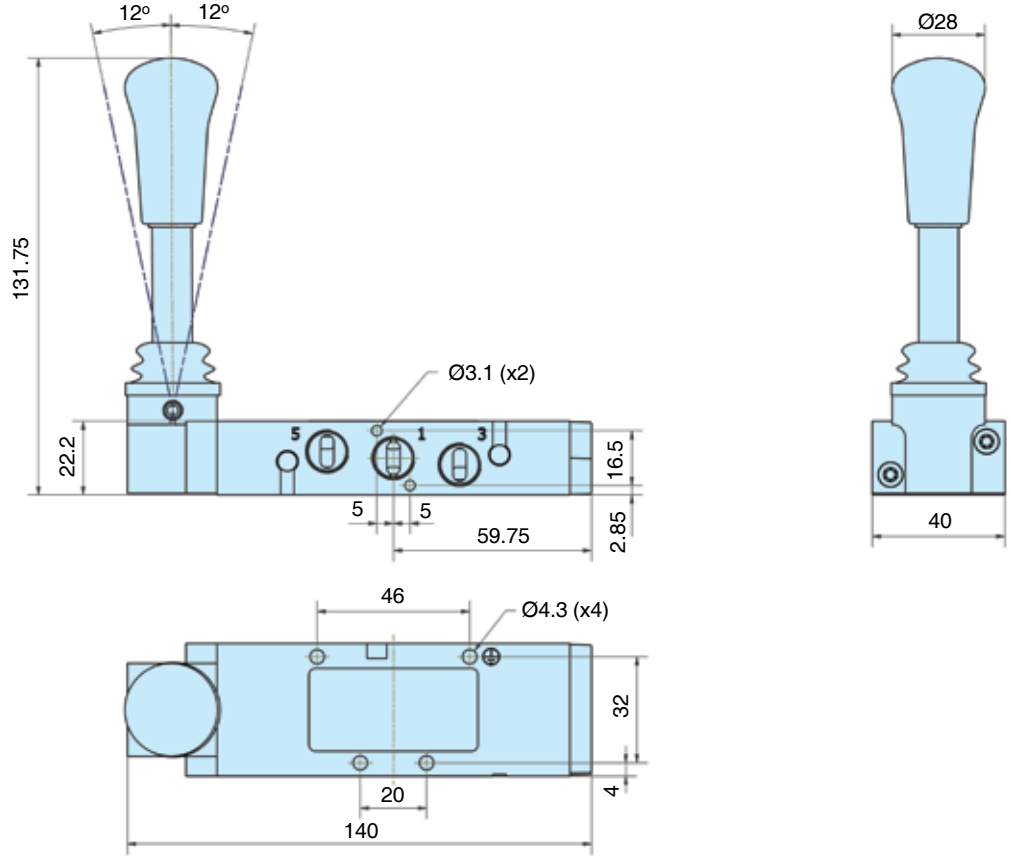

Dimensions

P2LCX - 3/2 Lever operated directional control valves

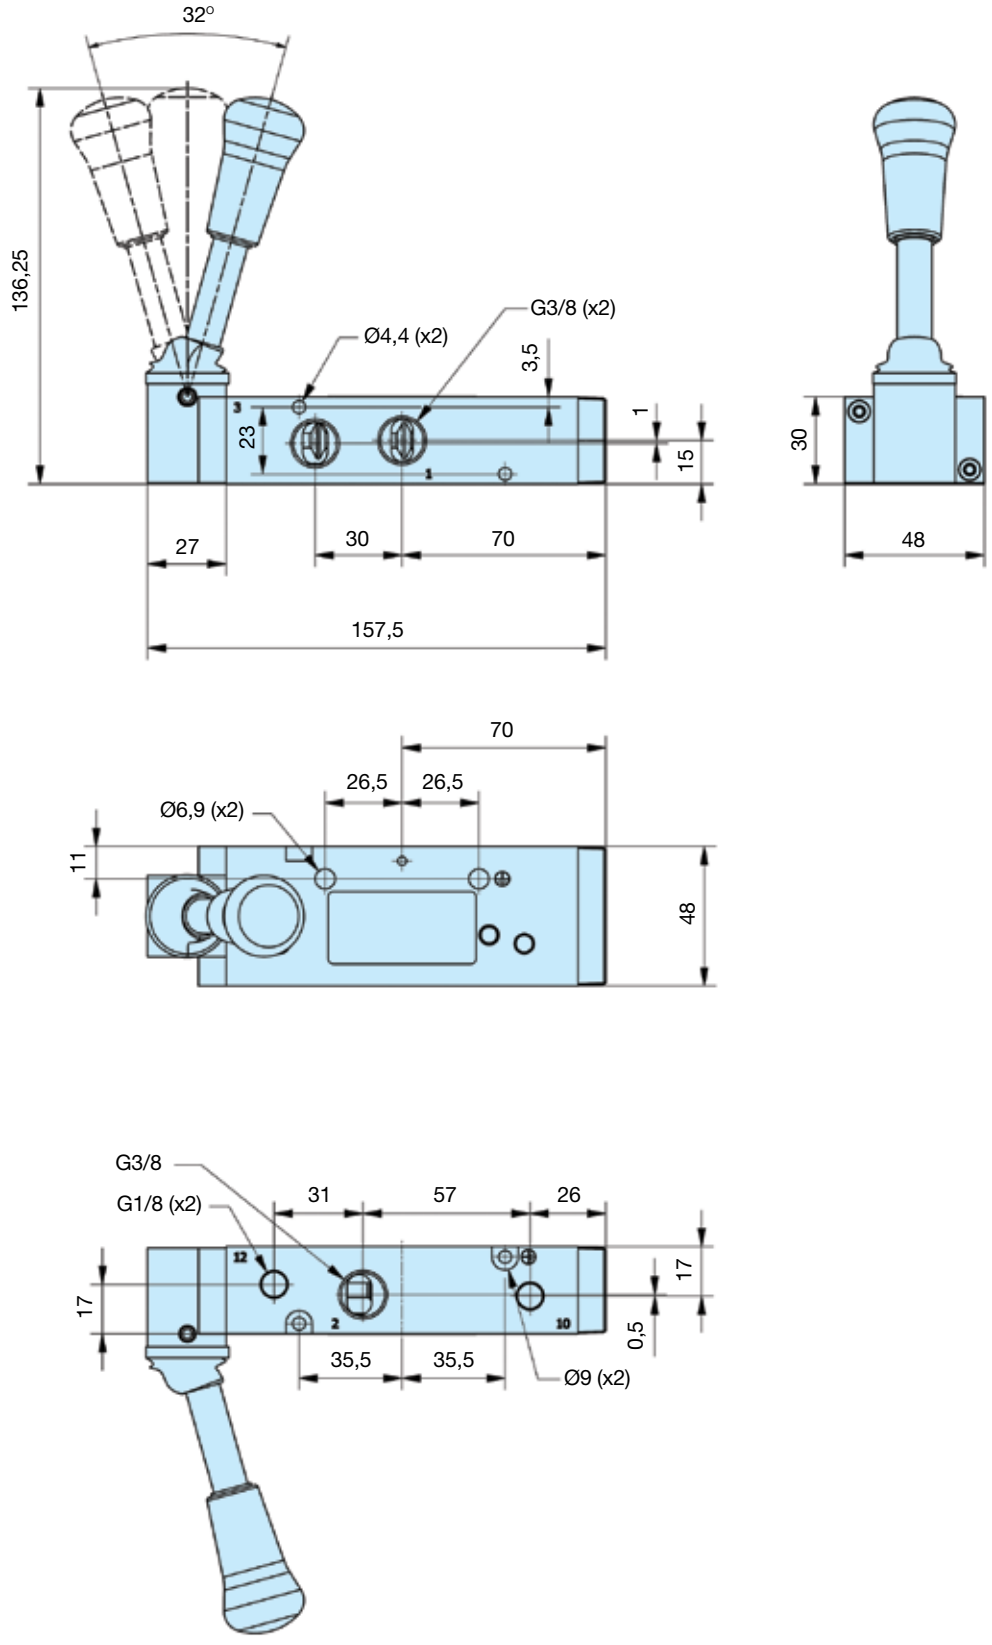

Dimensions

P2LCX - 5/2 Lever operated directional control valves

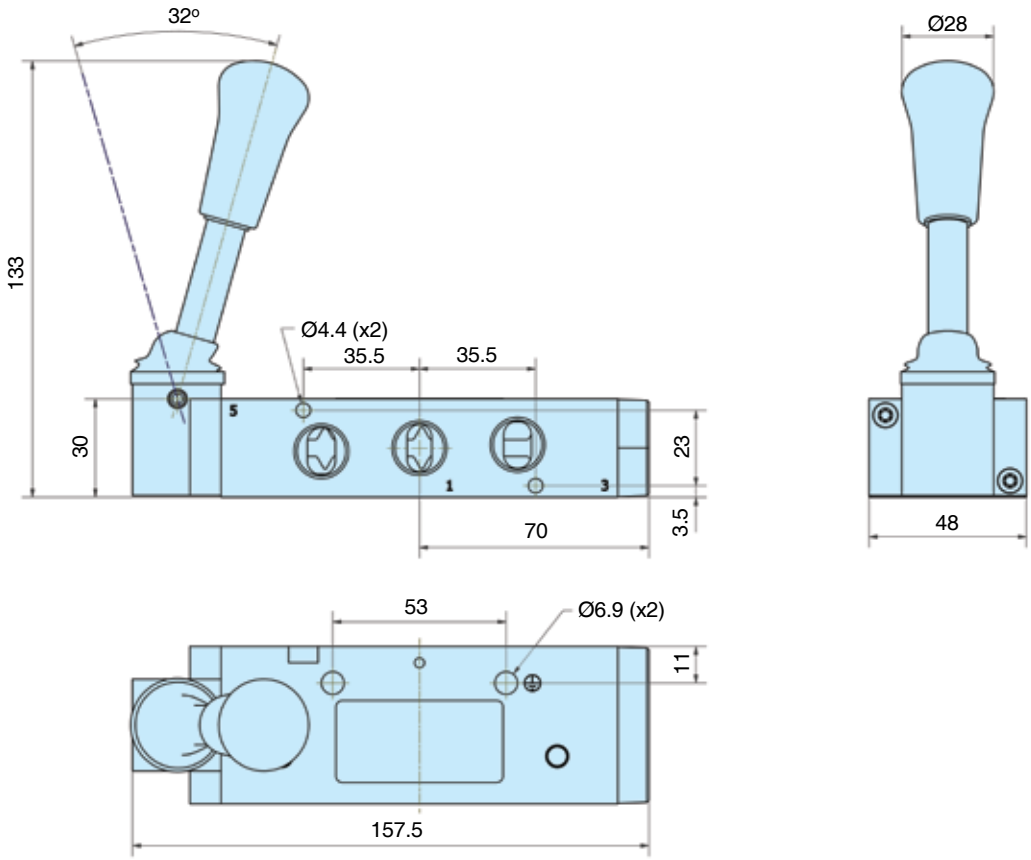

P2LCX - 5/3 Lever operated directional control valves

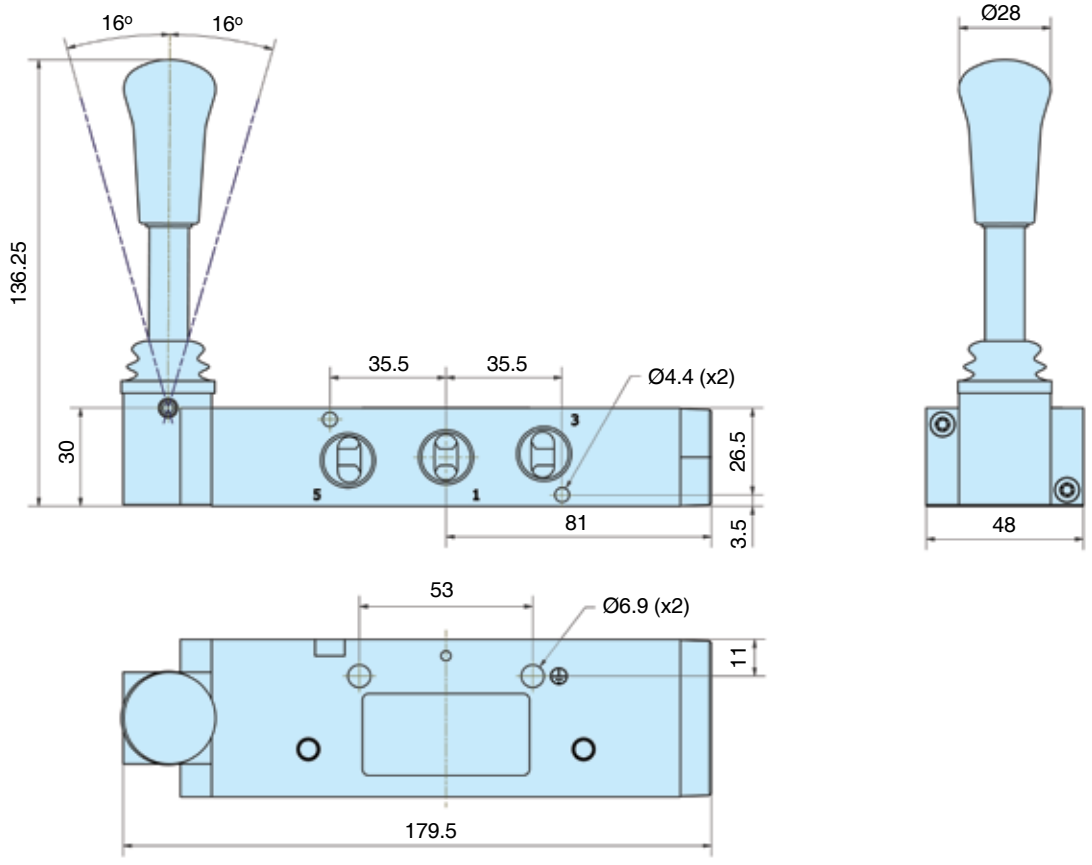

Dimensions

P2LDX - 3/2 Lever operated directional control valves

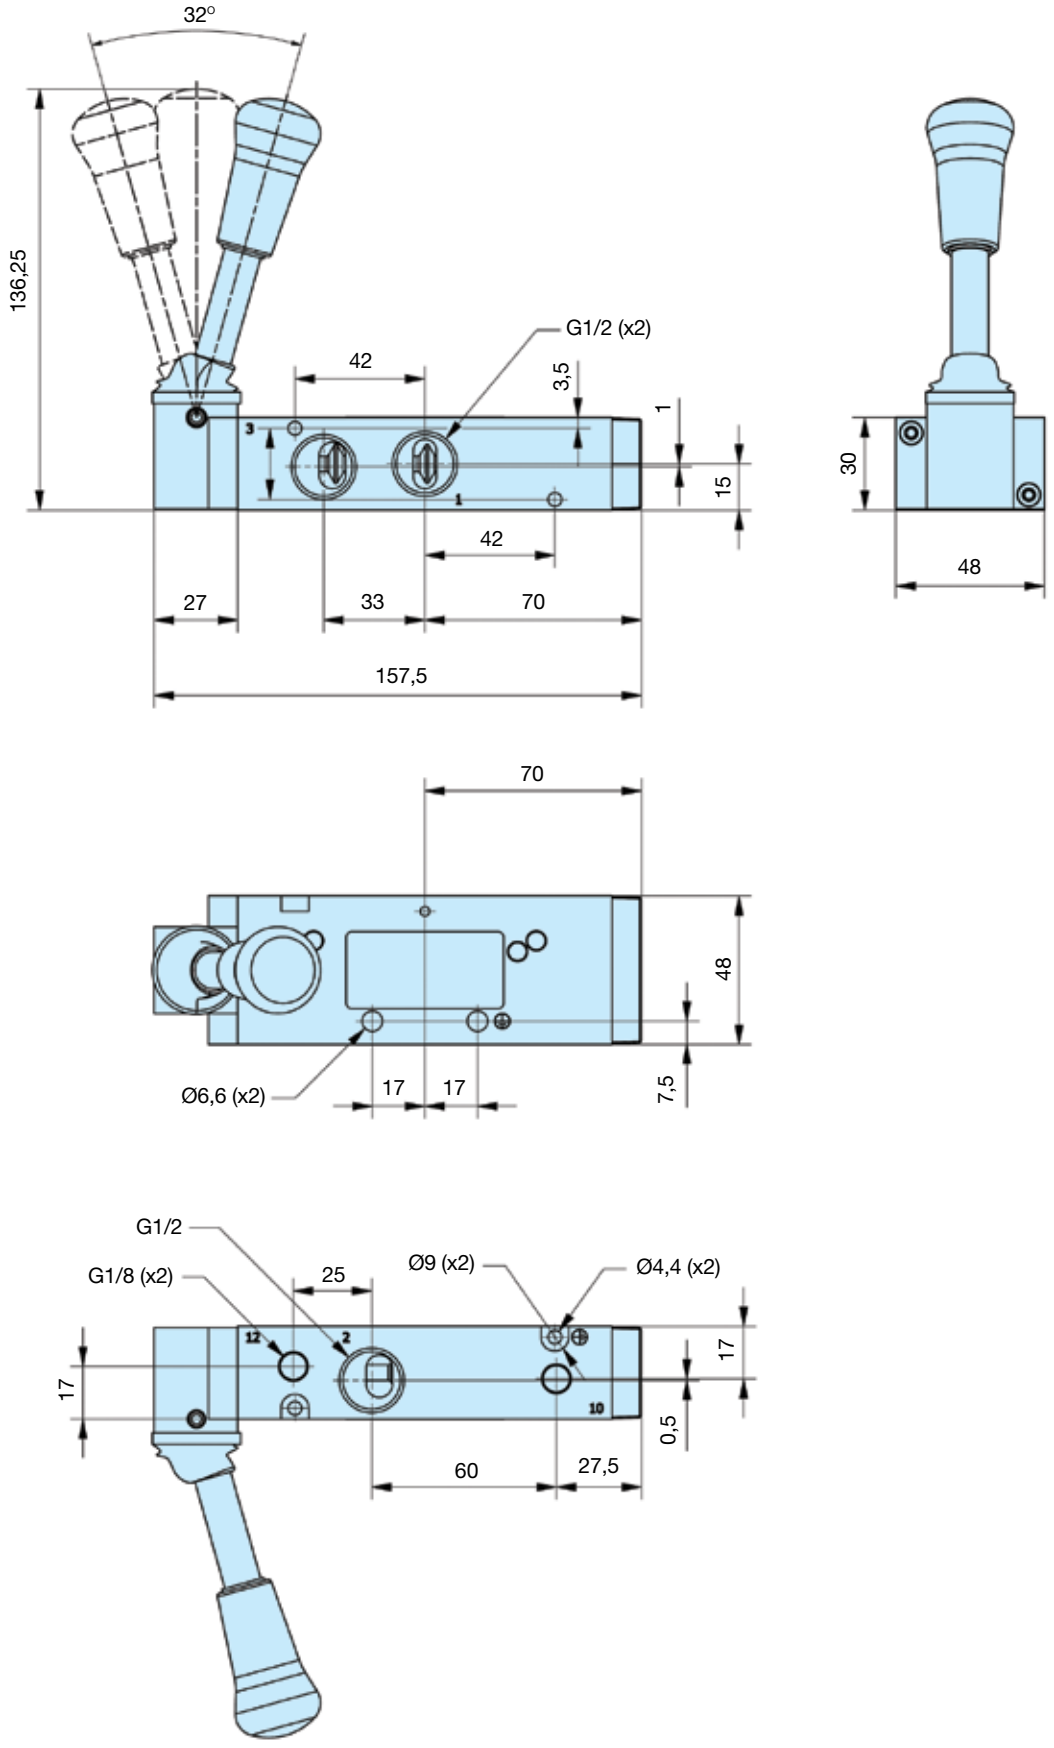

Dimensions

P2LDX - 5/2 Lever operated directional control valves

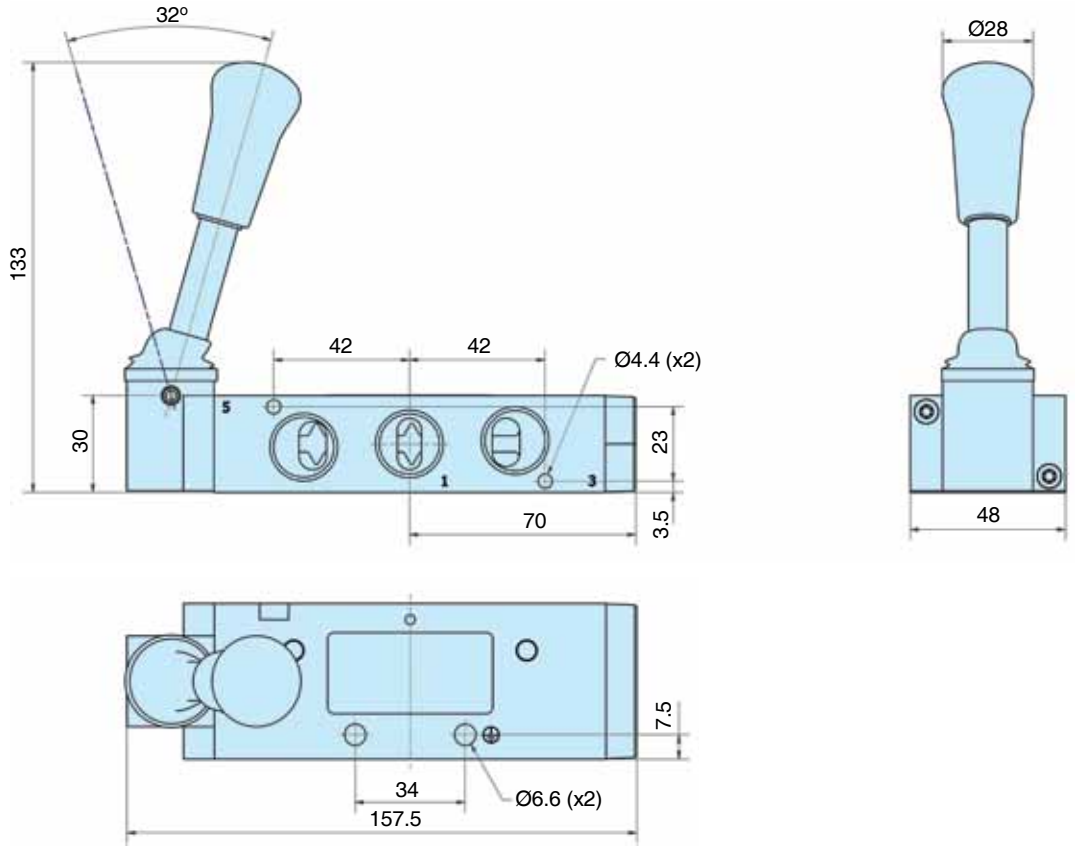

P2LDX - 5/3 Lever operated directional control valves

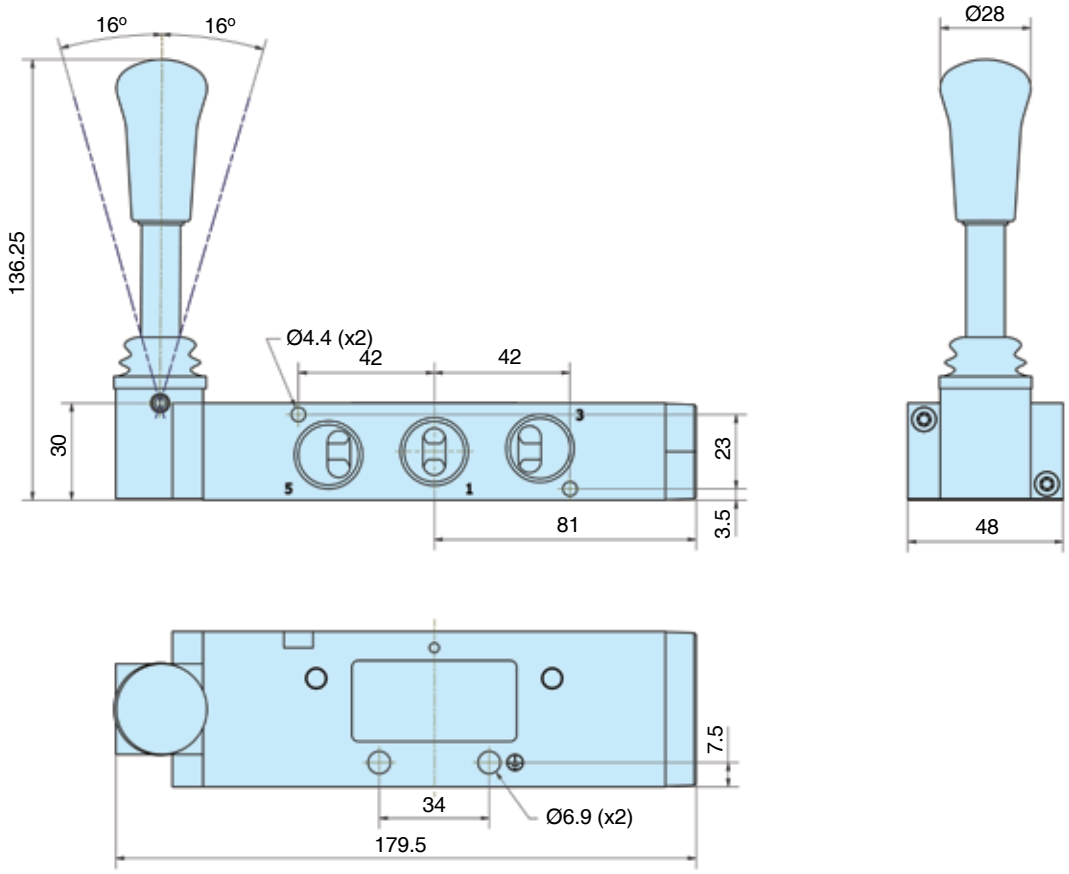

Dimensions

P2LBX - 3/2 Twist operated directional control valves

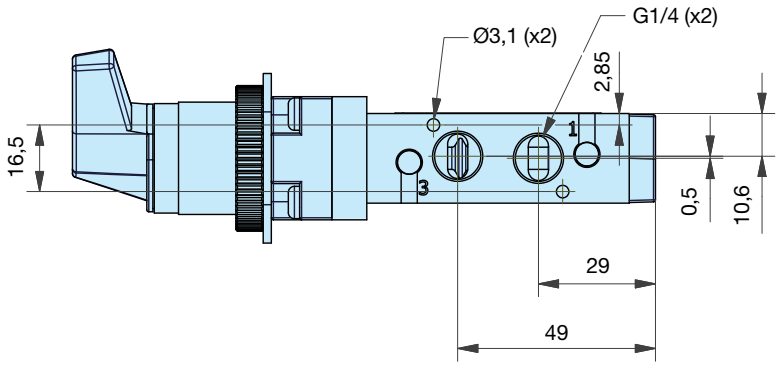

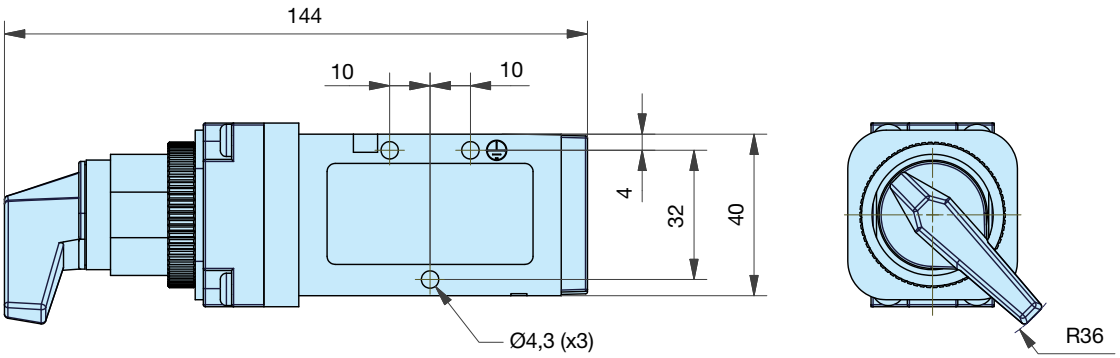

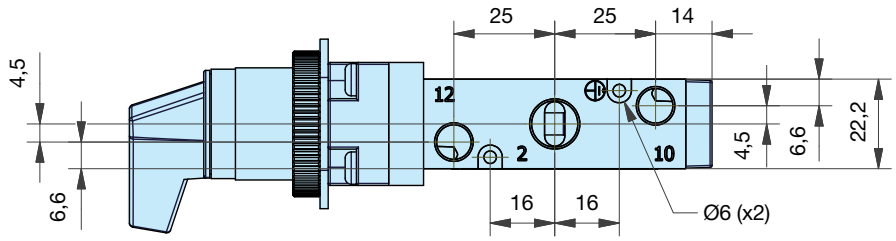

Panel cut-out details

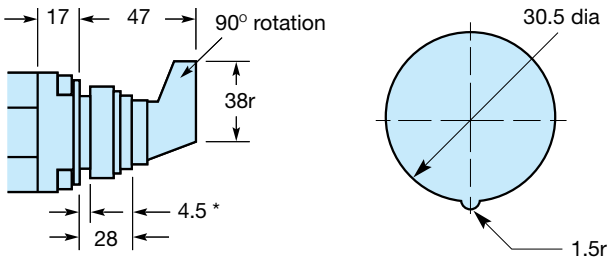

* Max panel thickness

Dimensions

P2LBX - 5/2 Twist operated directional control valves

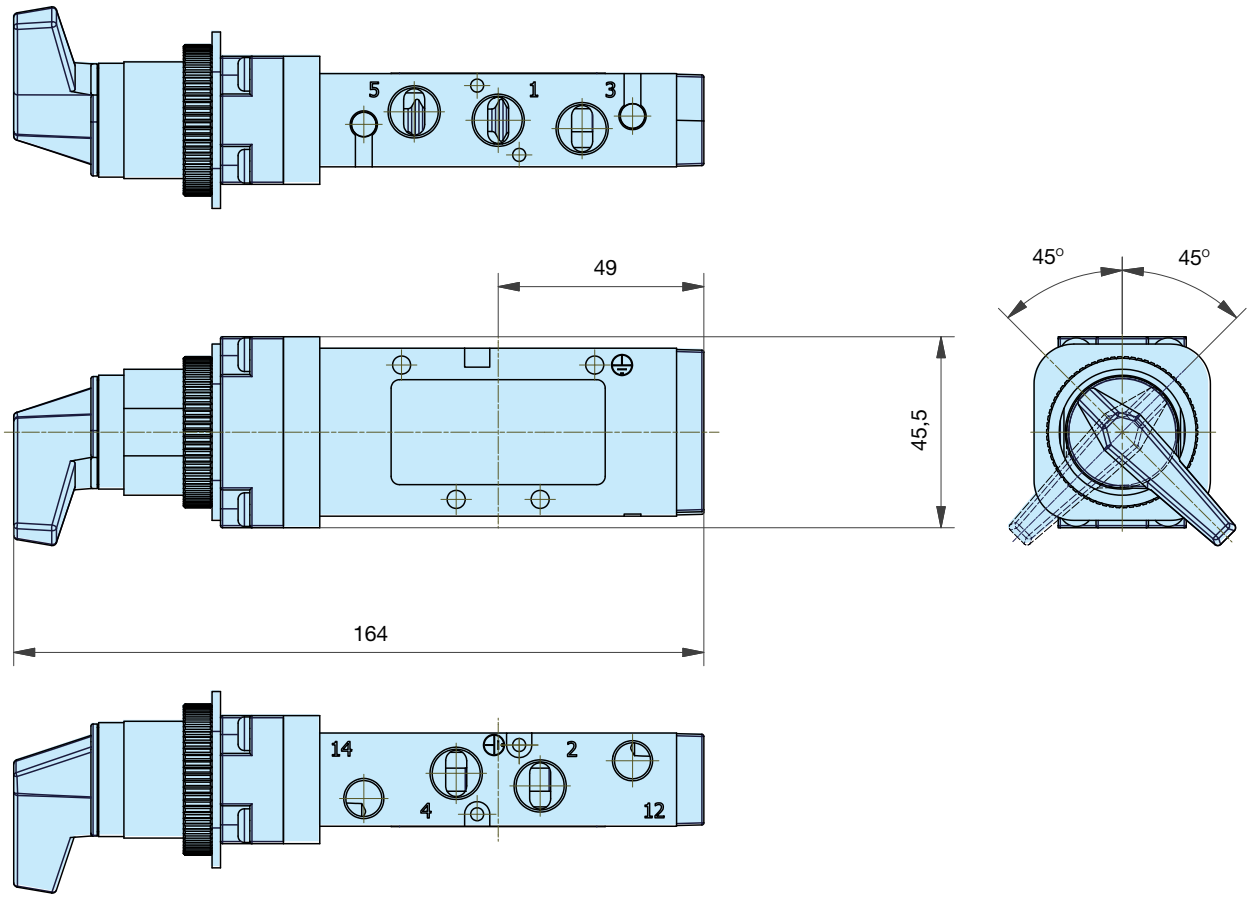

Dimensions

P2LBX - 5/3 Twist operated directional control valves

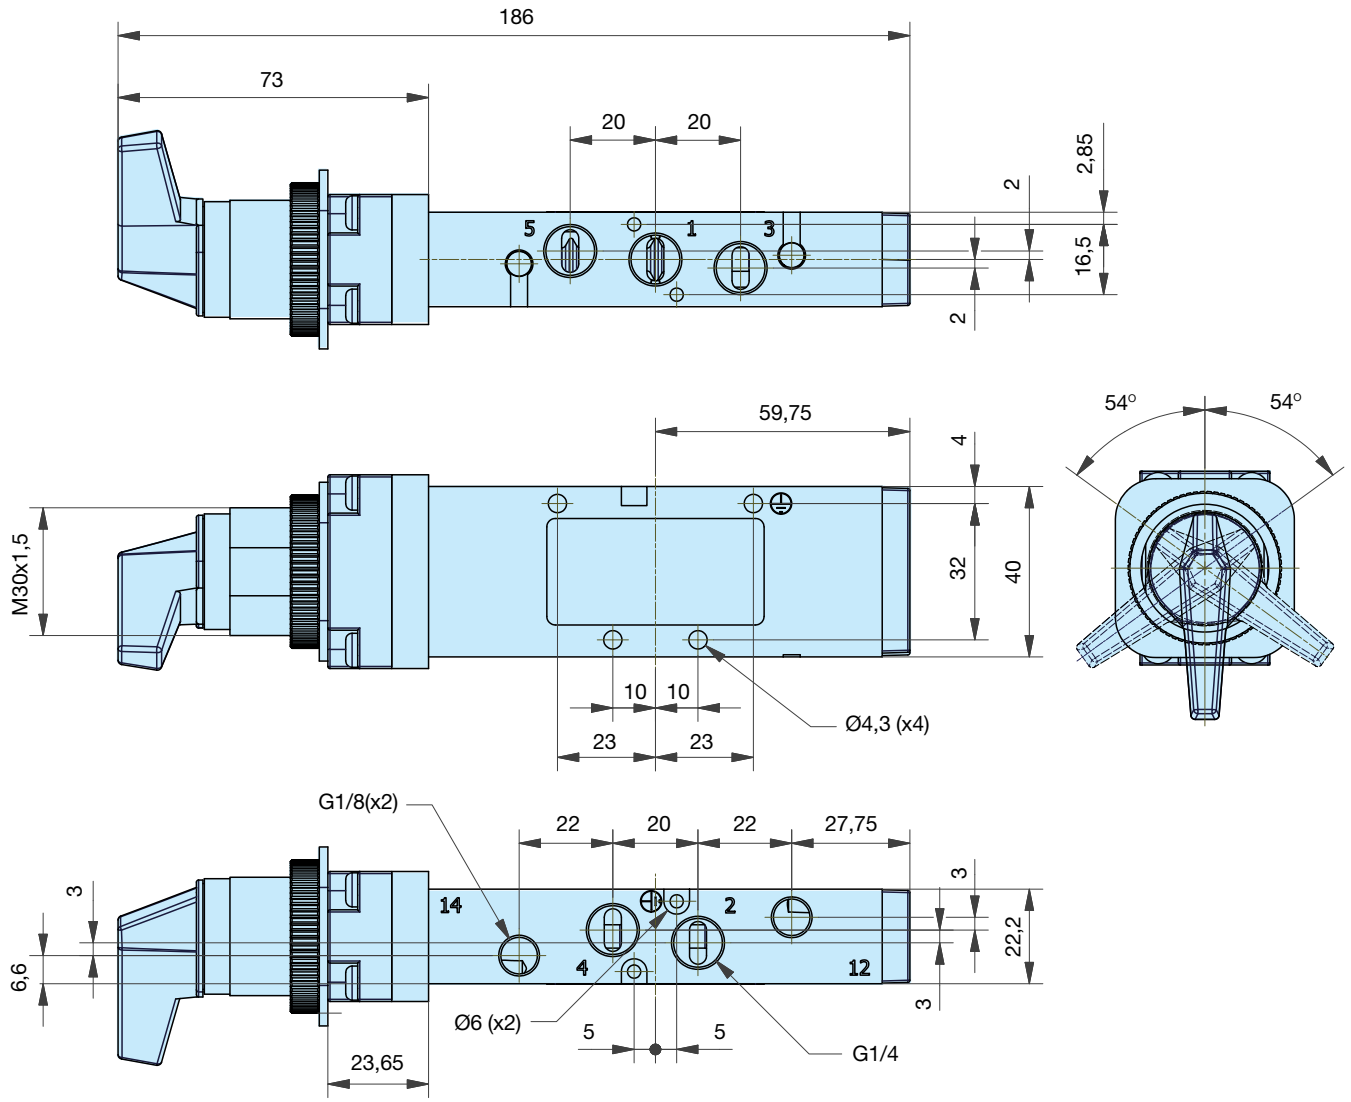

Dimensions

P2LBX - 3/2 Lever

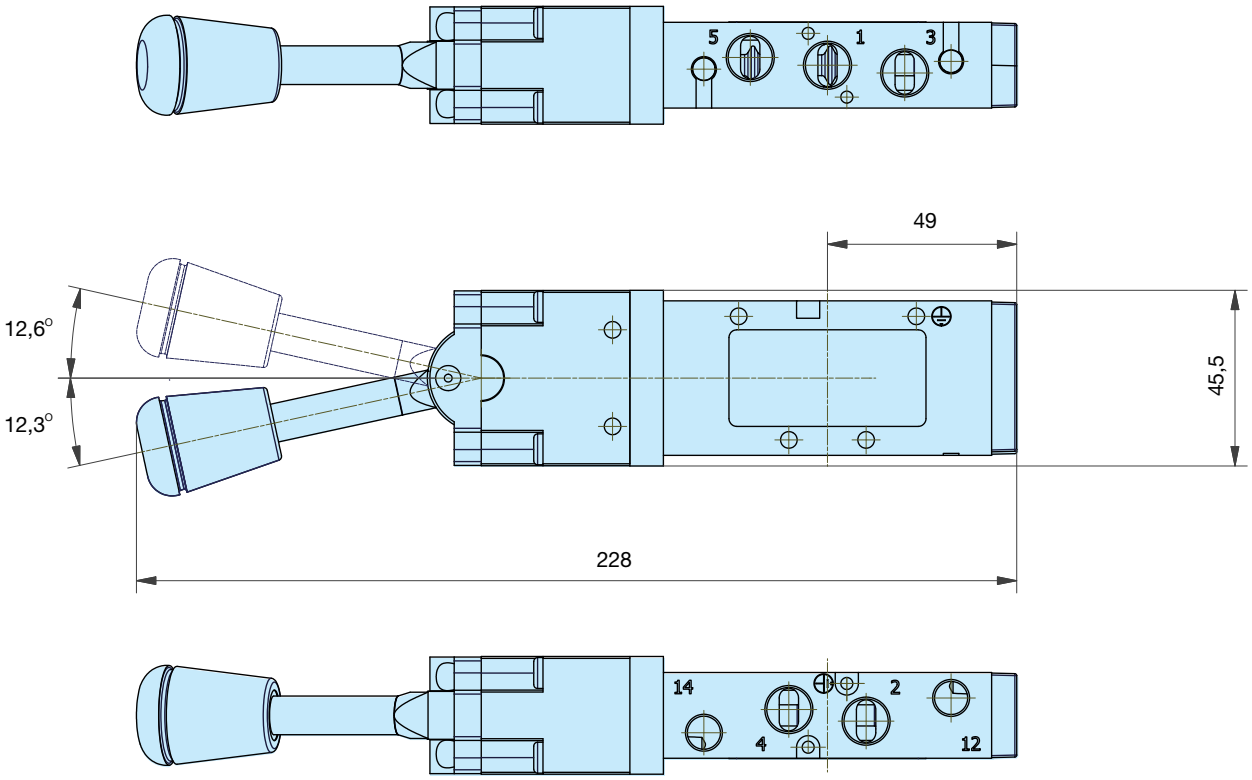

Dimensions

P2LBX - 5/2 Lever

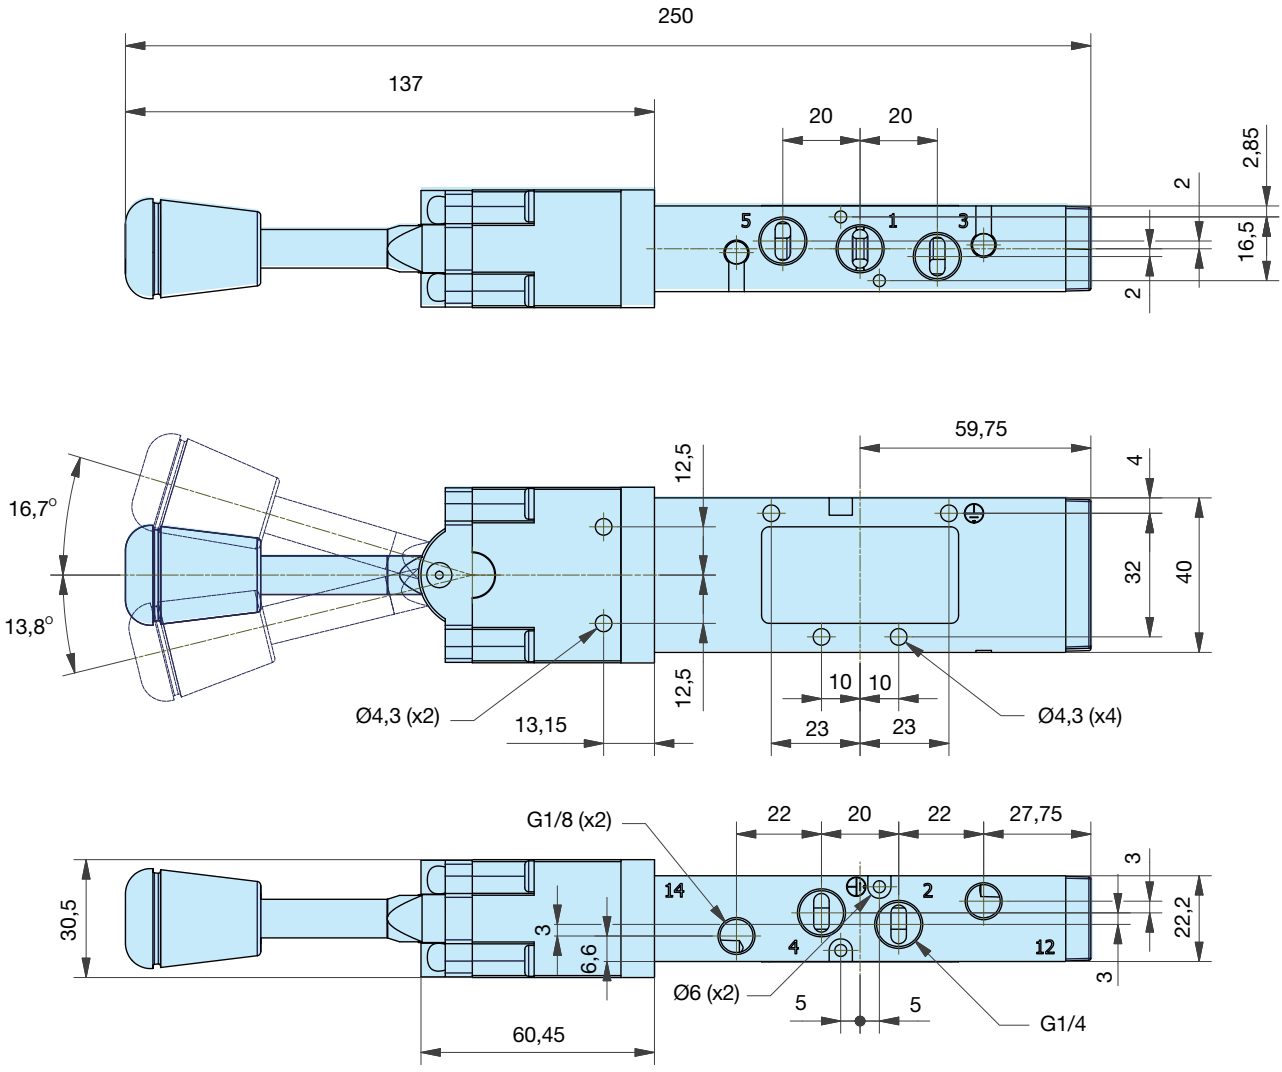

Dimensions

P2LBX - 5/3 Lever

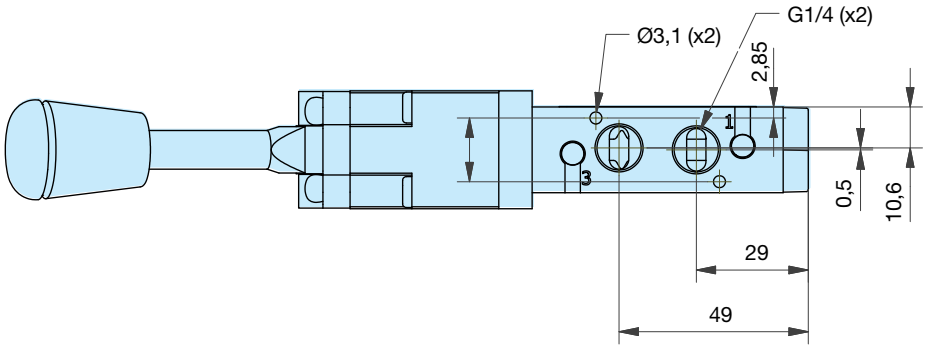

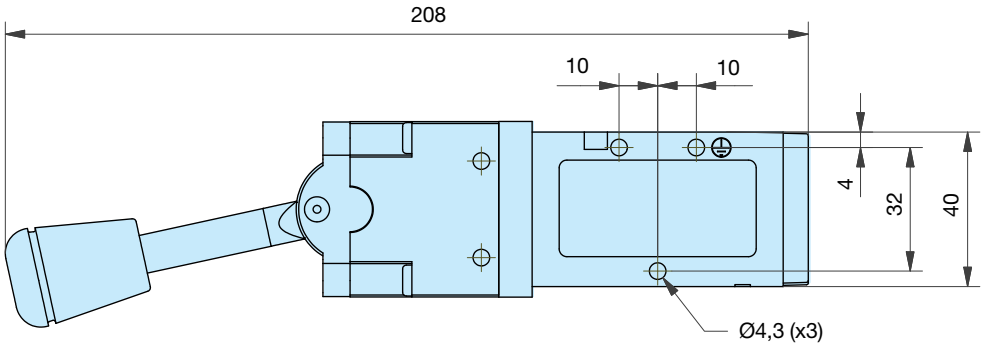

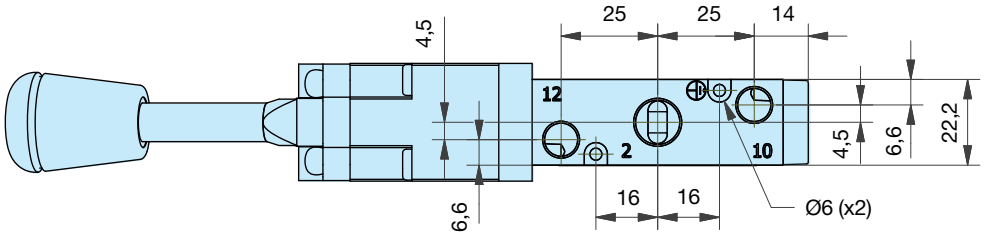

Dimensions

P2LBX... all
3/2 valves

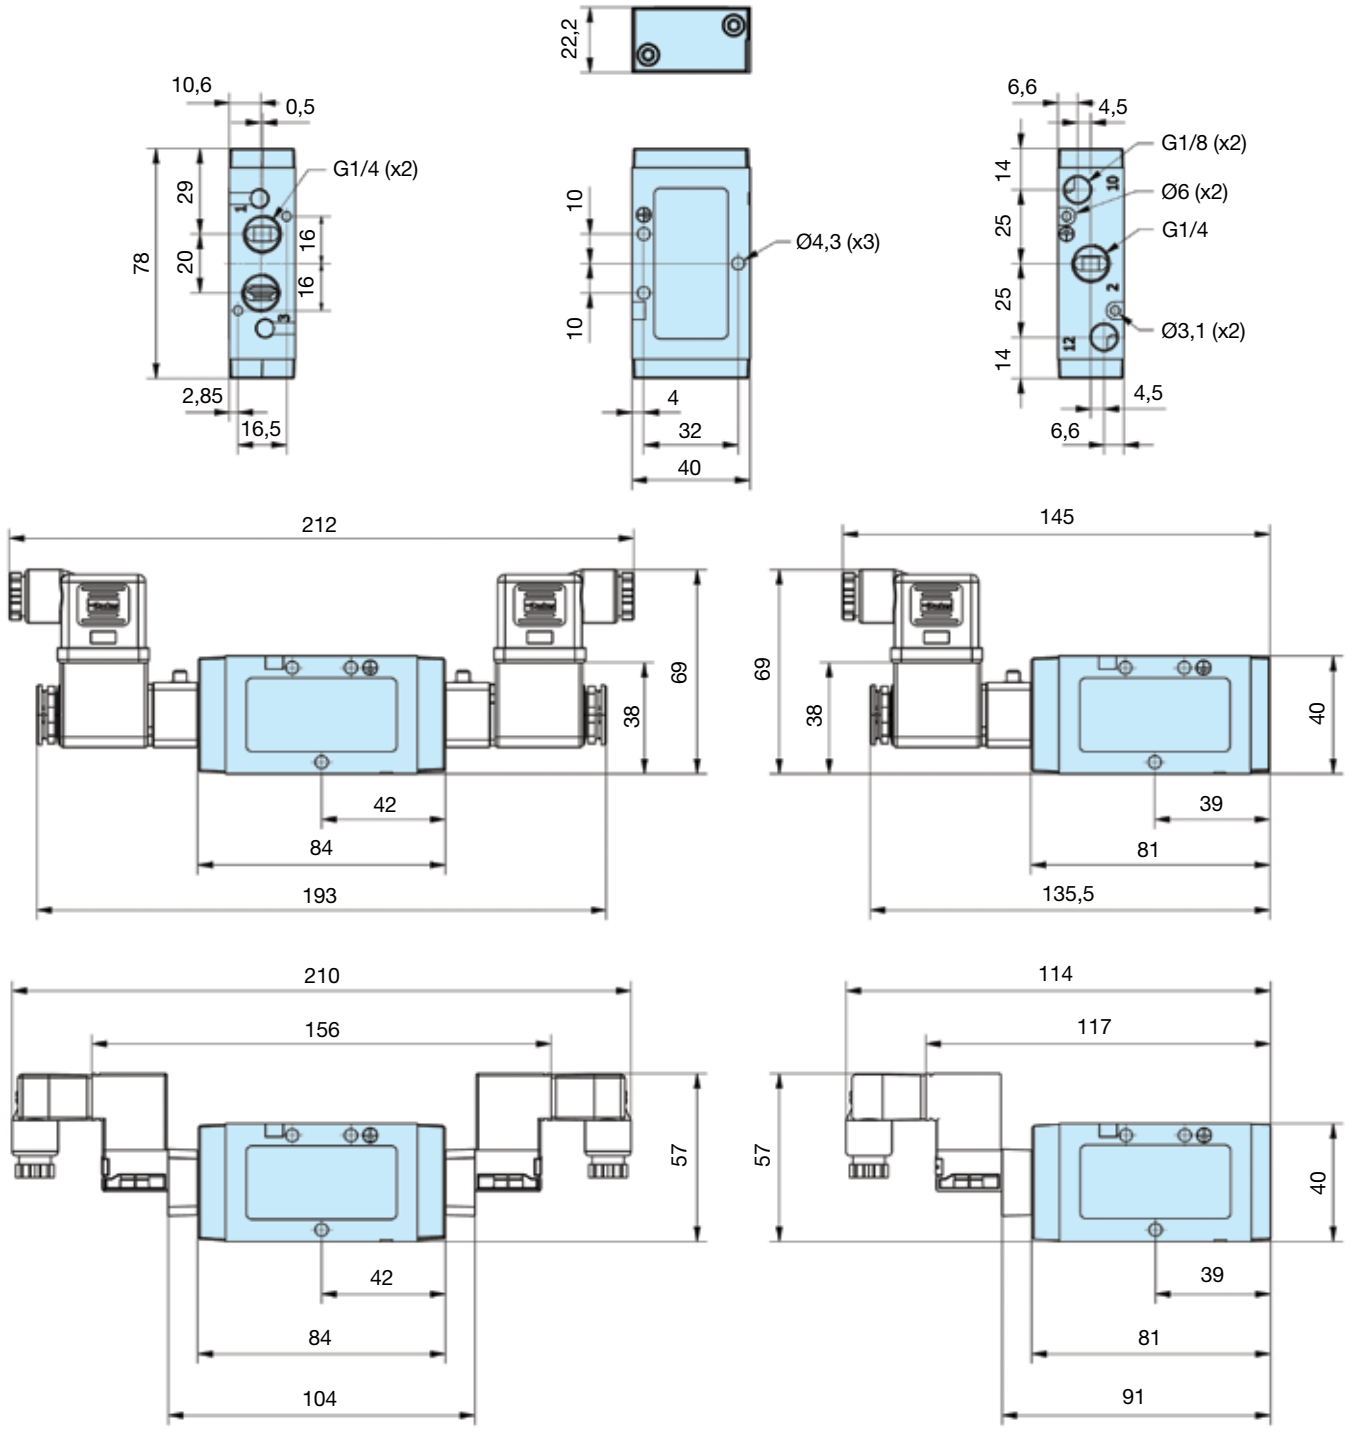

Dimensions

P2LBX... all
5/2 and 5/3 valves

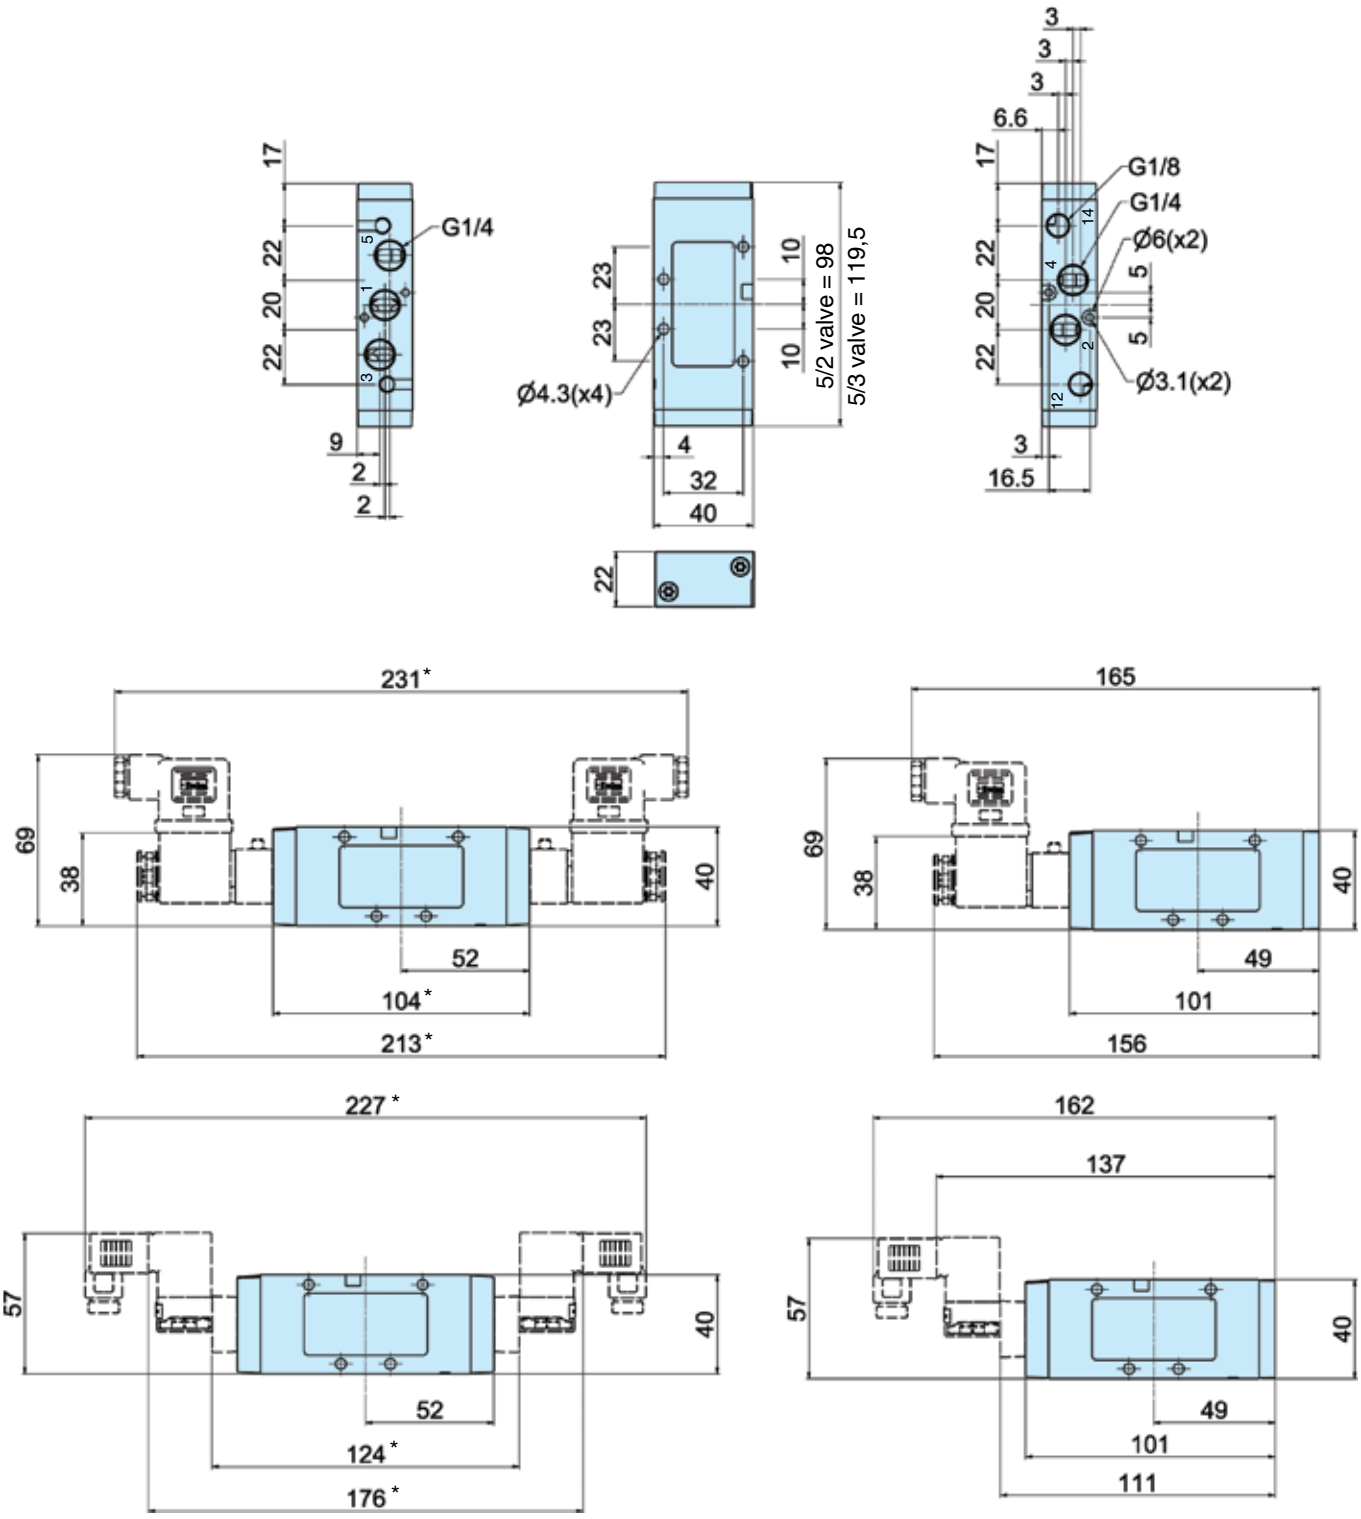

*** Note:** 5/3 valves - add 21.5mm

Dimensions

NAMUR
5/2 valves

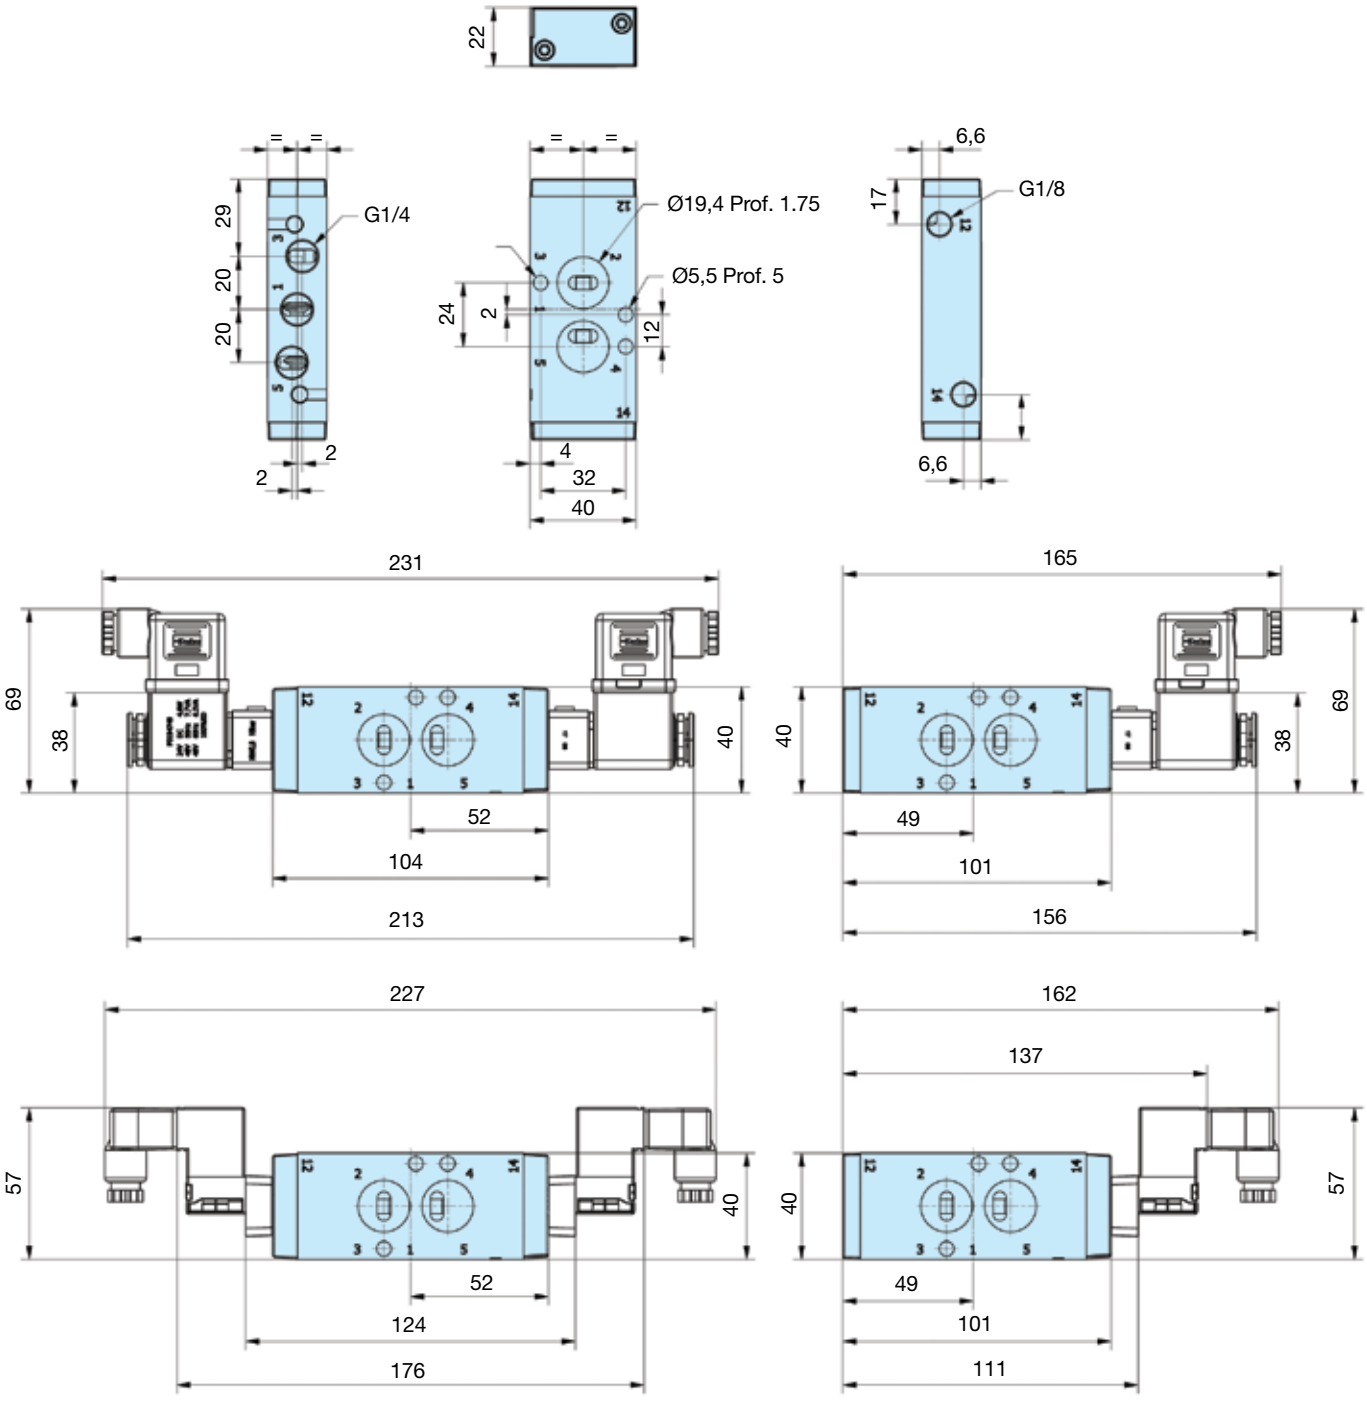

Dimensions

P2LCX... all
3/2 valves

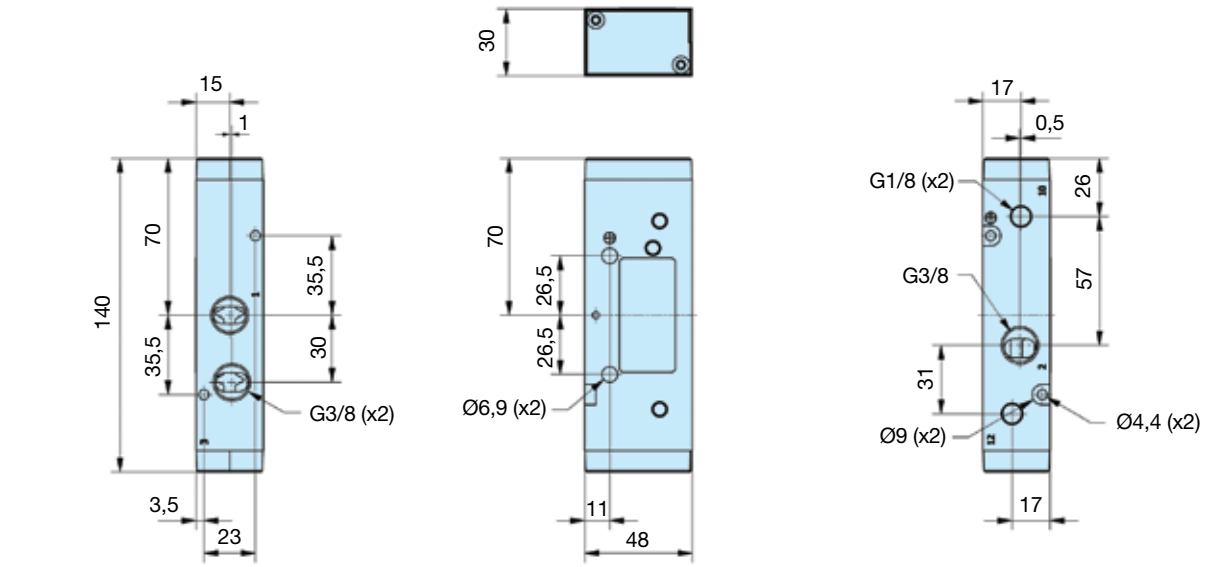

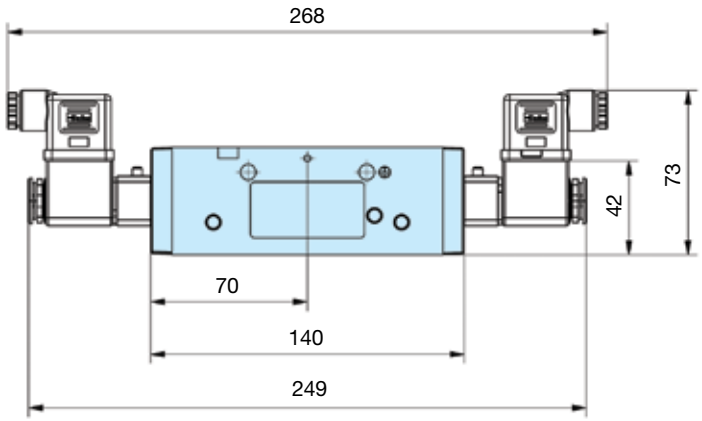

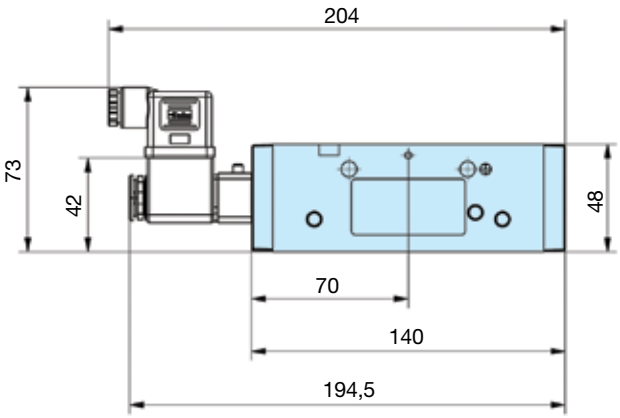

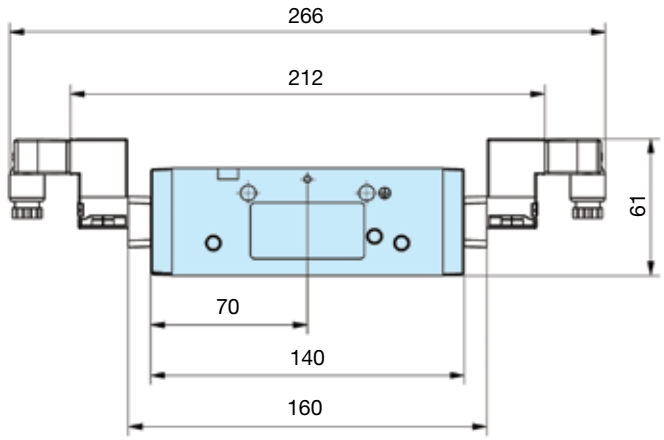

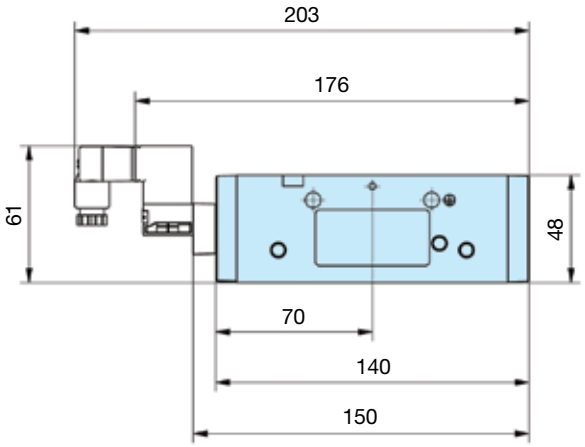

Dimensions

P2LCX... all
5/2 and 5/3 valves

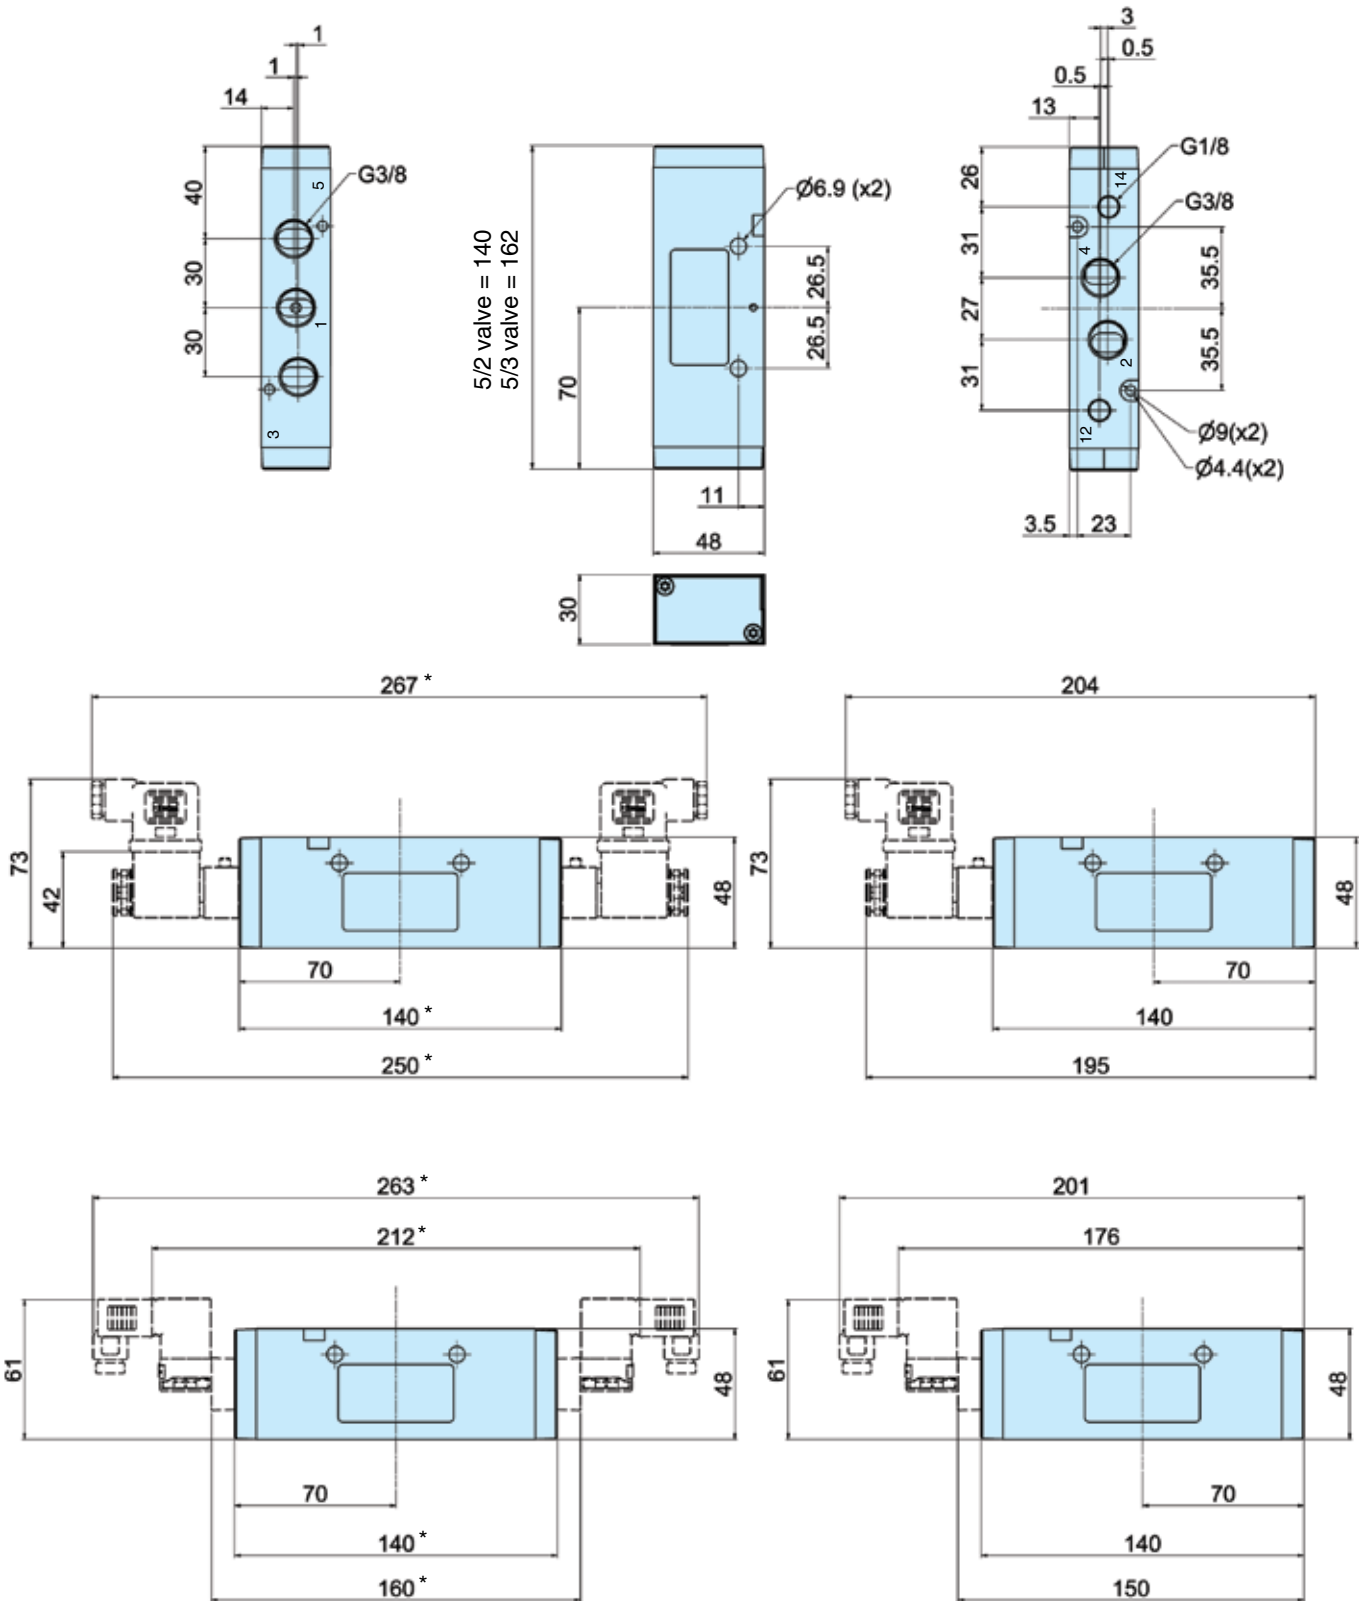

*** Note:** 5/3 valves - add 22.0mm

Dimensions

P2LDX... all
3/2 valves

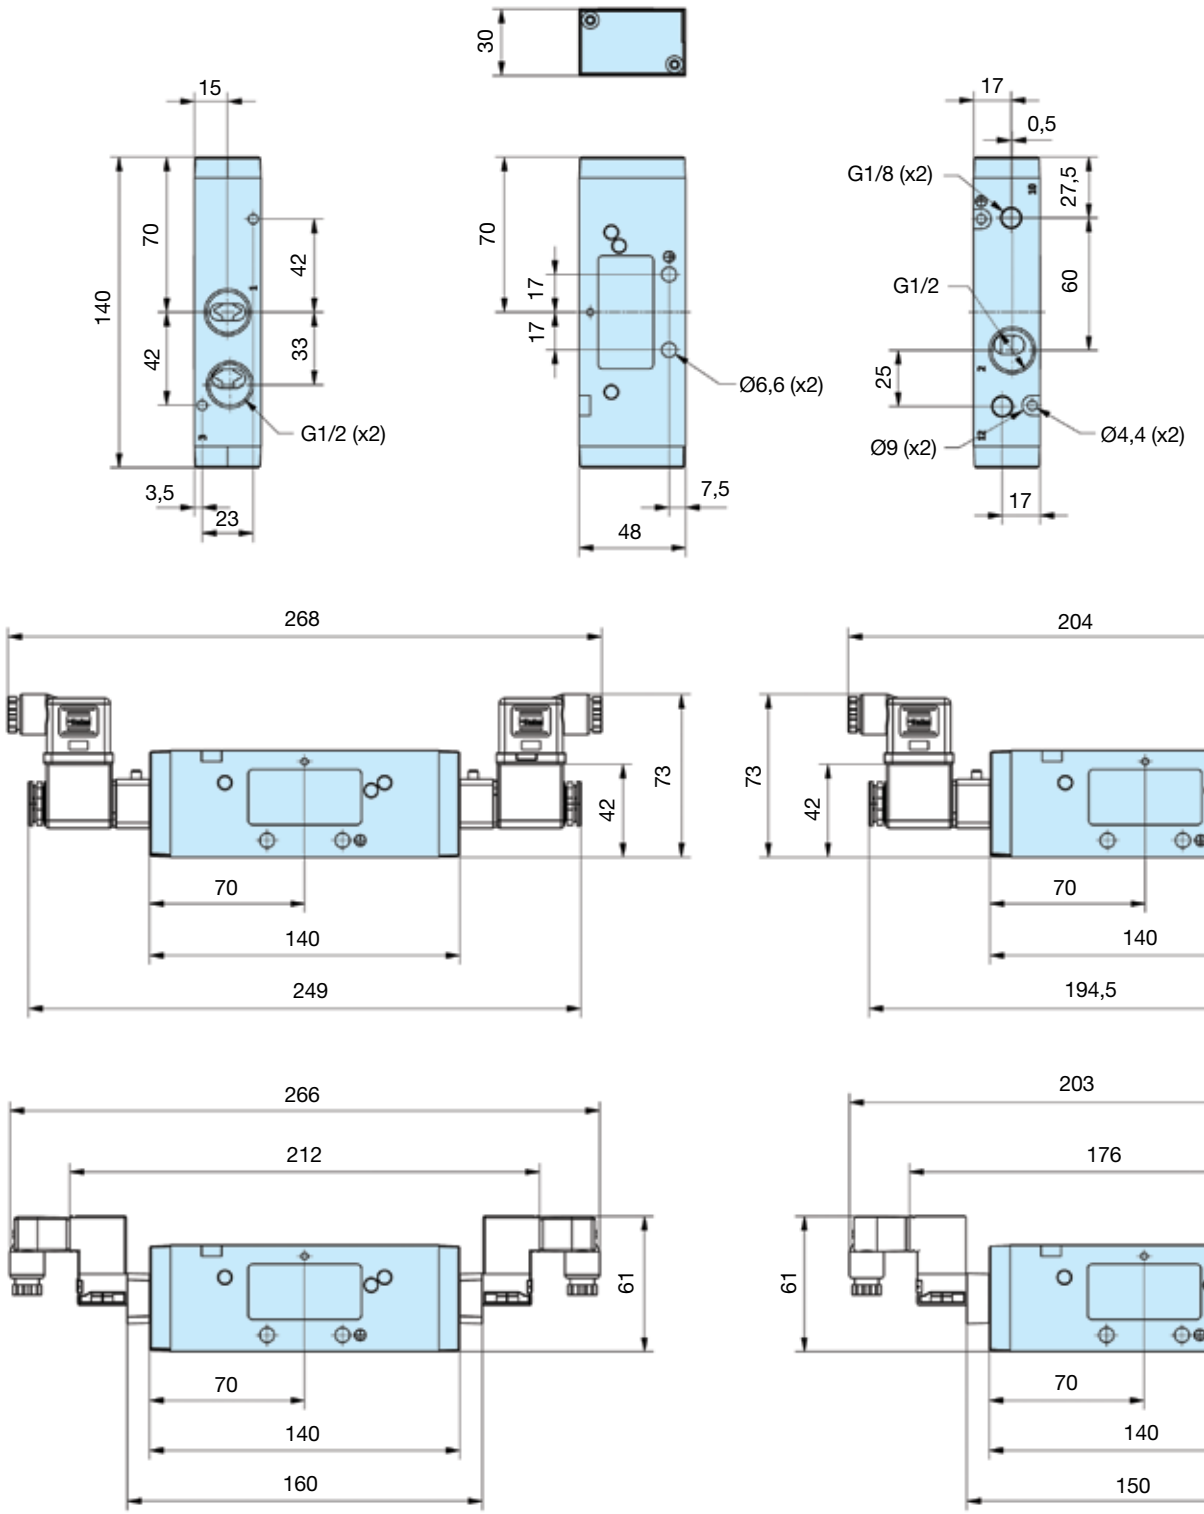

Dimensions

P2LDX... all
5/2 and 5/3 valves

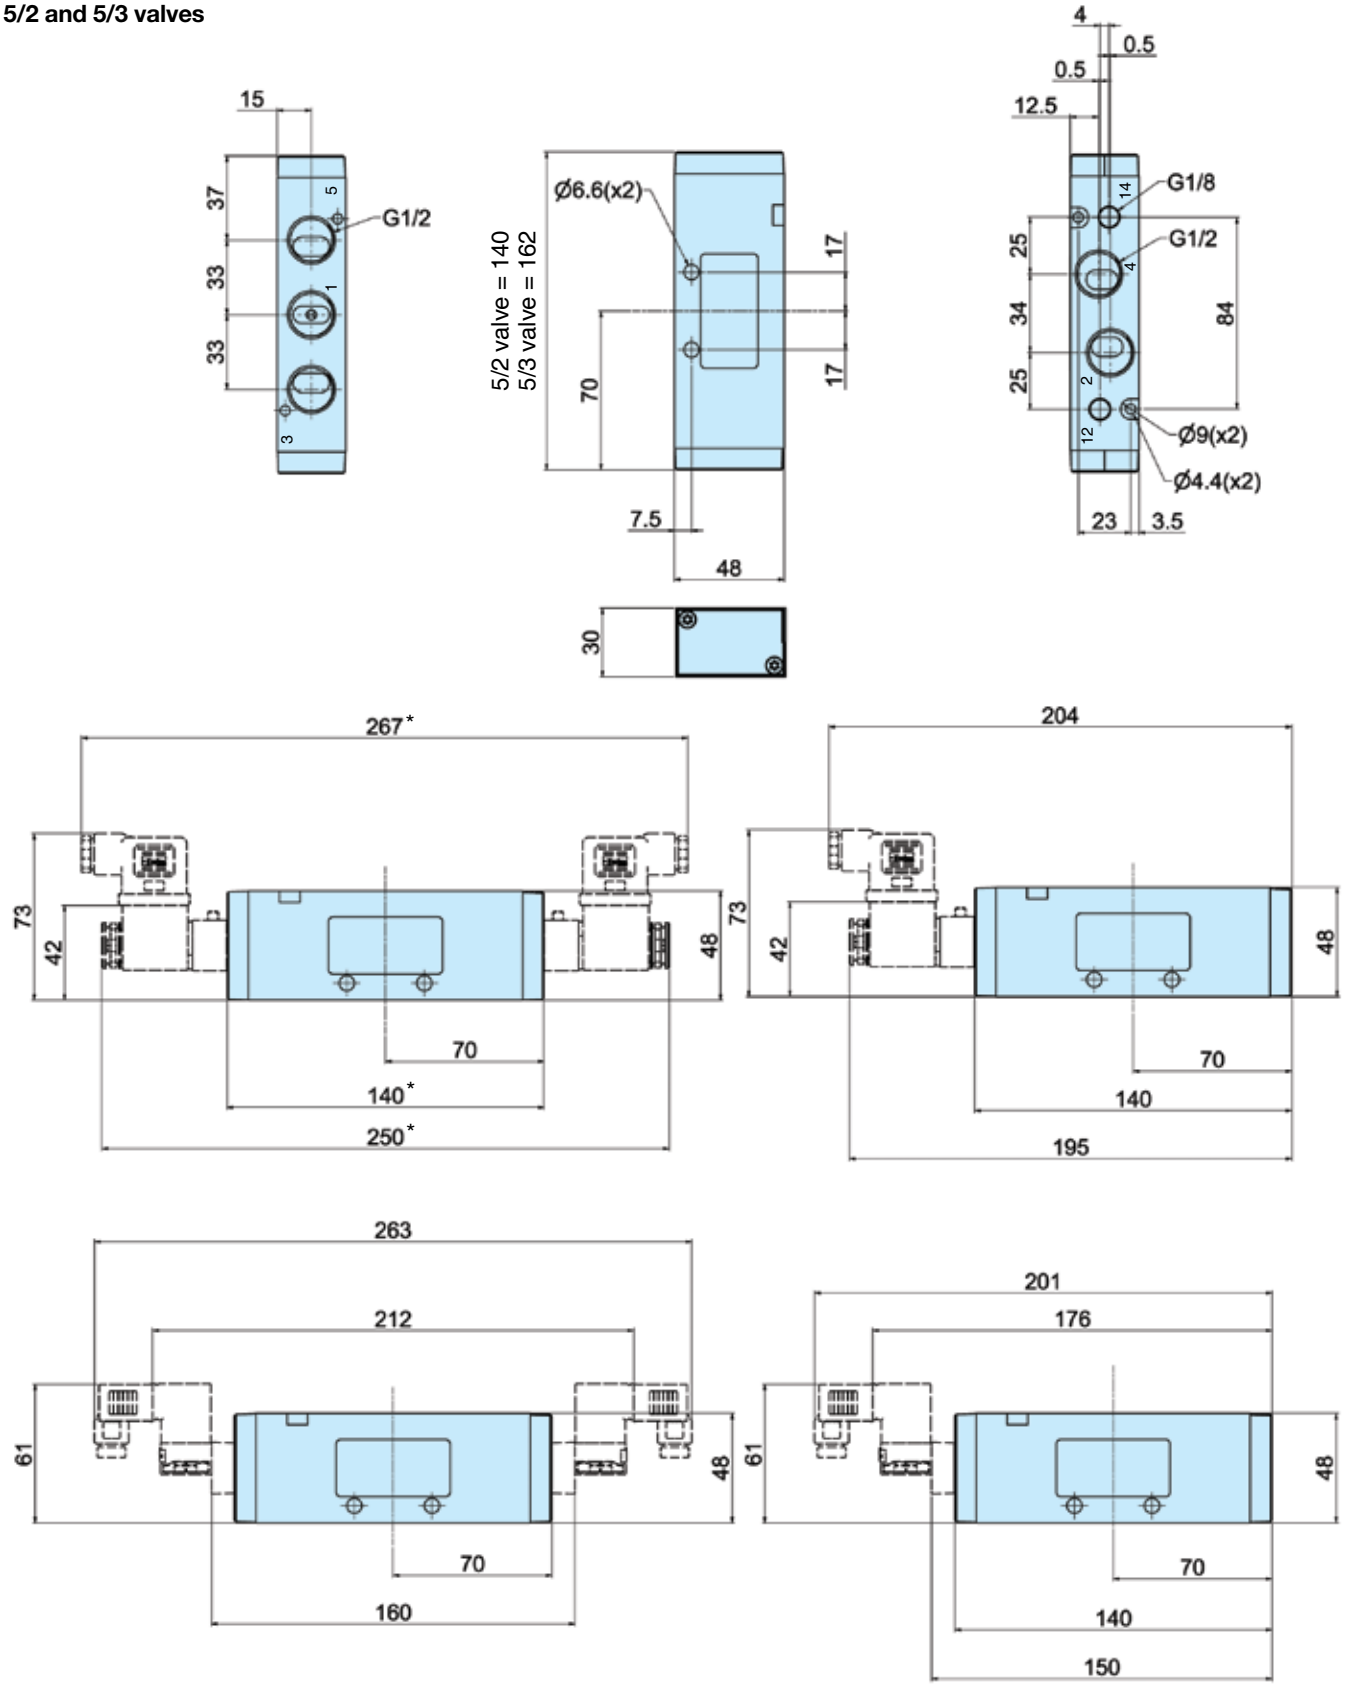

*** Note:** 5/3 valves - add 22.0mm

Dimensions

NAMUR
5/2 and 5/3 valves

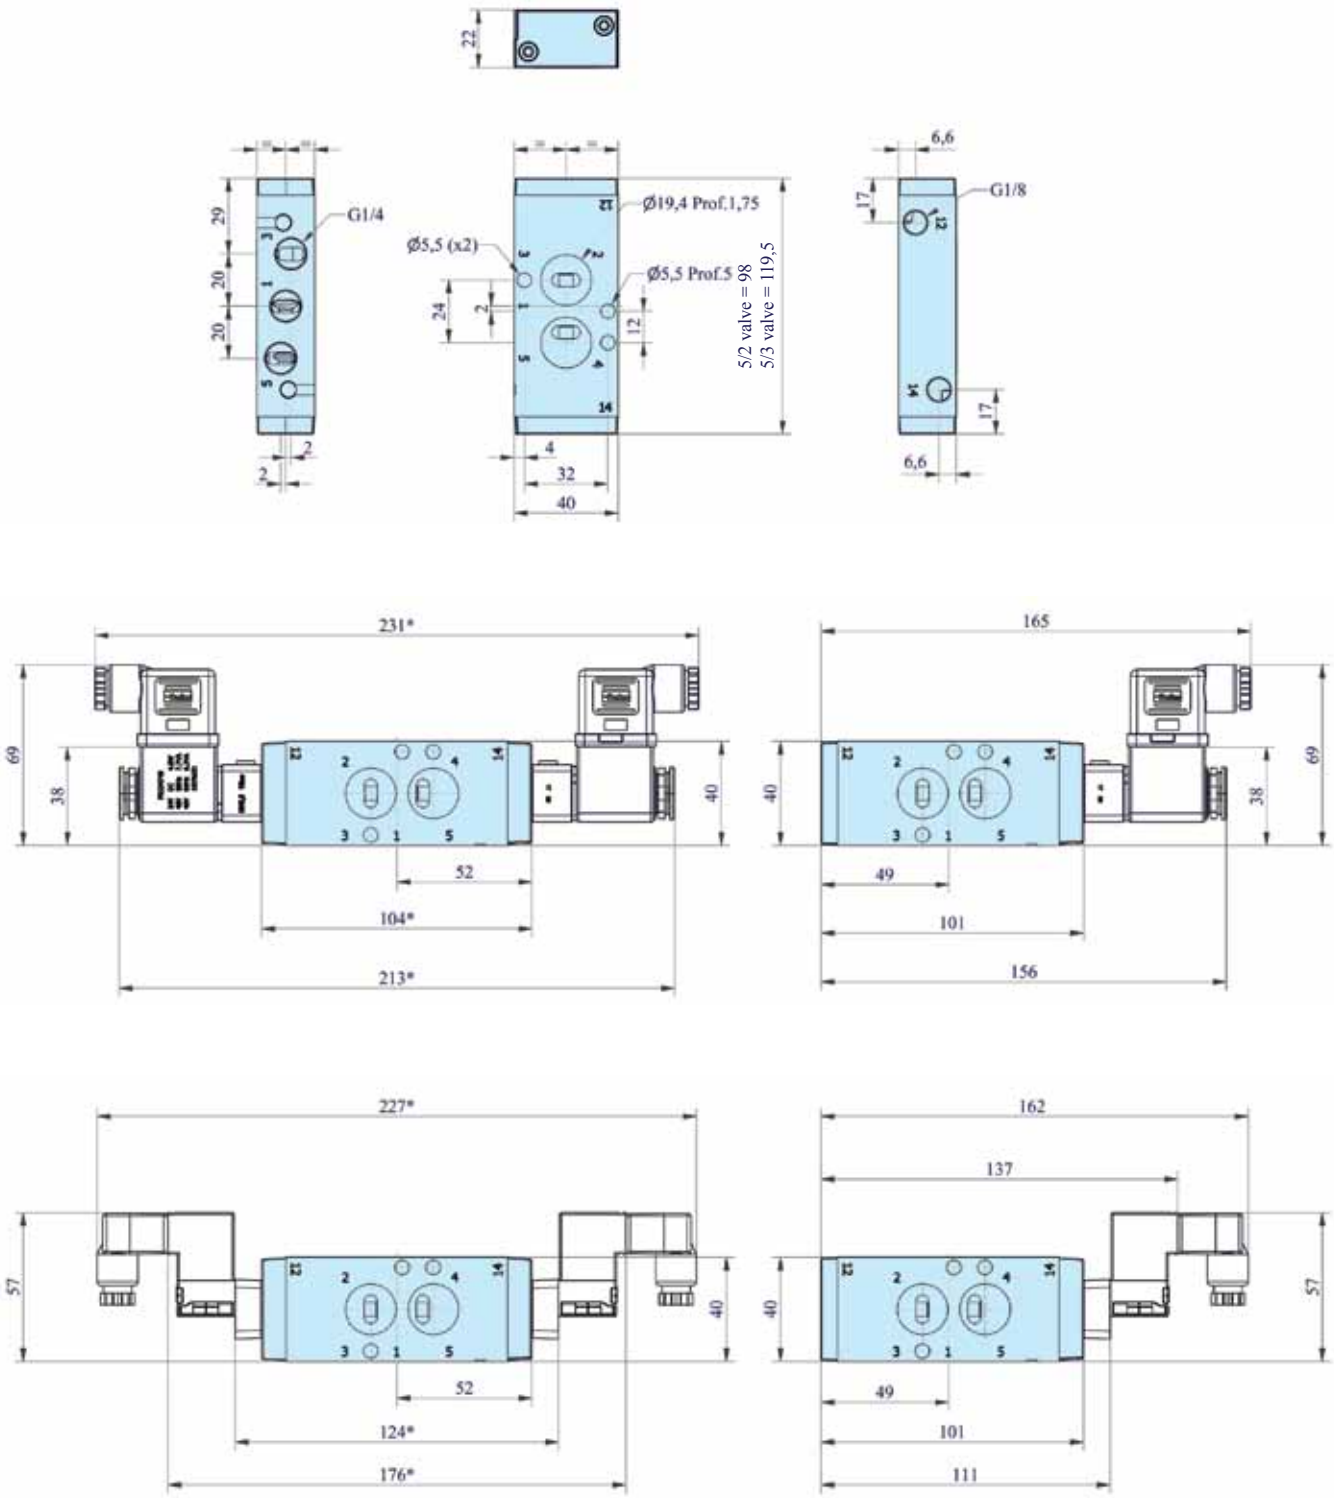

P2LAX, flexible manifold assembly

A practical system solution with the aid of connection pieces. The manifolds can easily be assembled from the top to form a compact and stable block. The block can then be installed in cabinets or directly on the machine frame as shown in the example in the bottom of this page.



Valve:
with cylinder ports 2 and 4 and signal ports 12 and 14 facing upwards, enabling easily access to connection ports. All ports are G1/8 threaded to simplify choice of connectors.

Manifold:
with common channels for ports 1, 3 and 5.

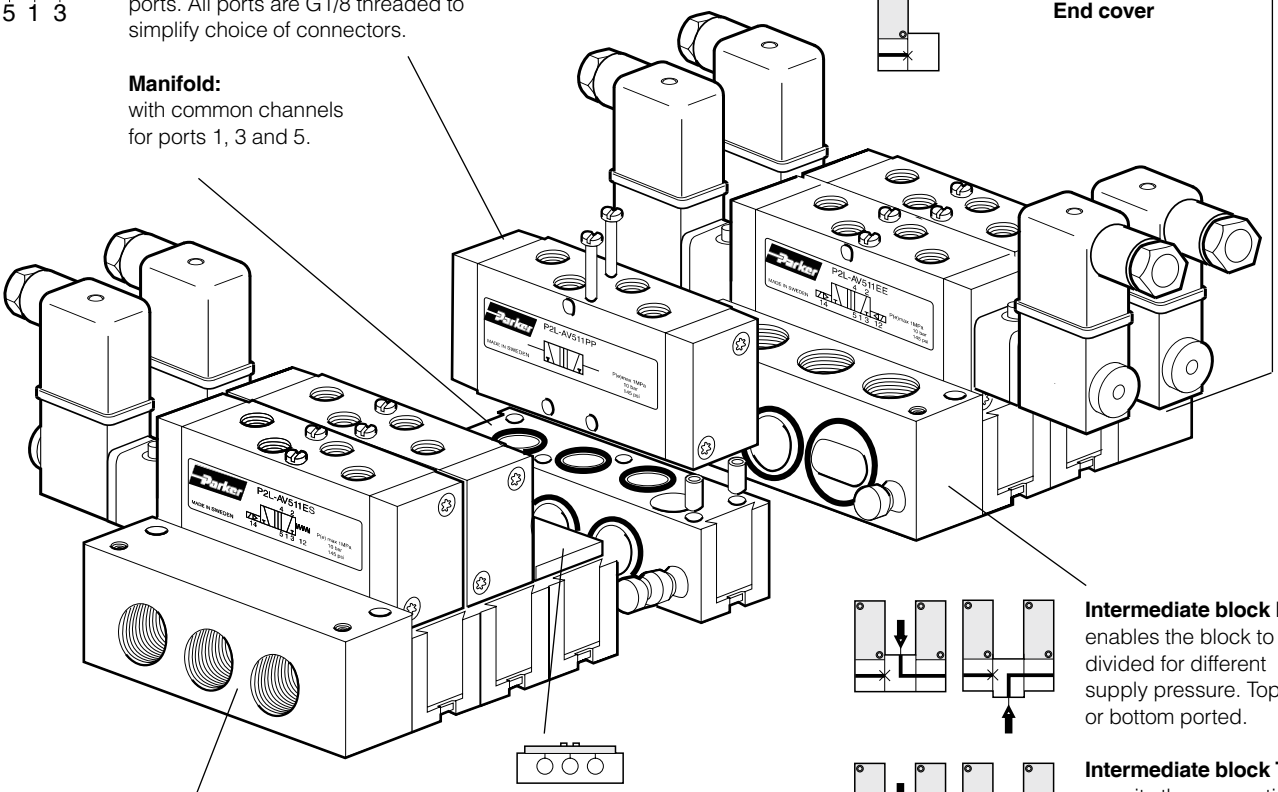



Connection block S:
straight connection block with a side ports for common air supply and exhaust.



Connection block L:
angled connection block for top or bottom ported.



End cover

Intermediate block L:
enables the block to be divided for different supply pressure. Top or bottom ported.



Intermediate block T:
permits the connection of air between two manifolds. Top or bottom ports.

Blanking plate:
To incorporate spare positions.



Connection block S:
straight connection block with a side ports for common air supply and exhaust.



Connection block L:
angled connection block for top or bottom ported.



End cover

Various mounting options

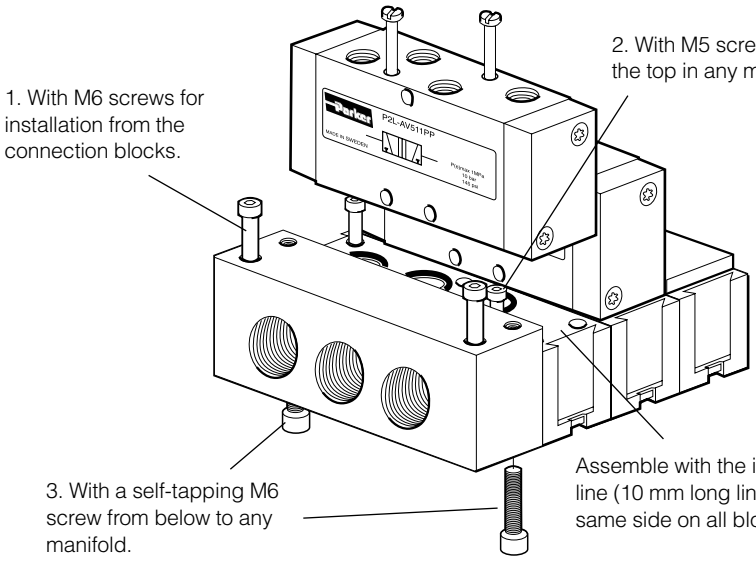

Accessories P2LA	Connection alternatives	Type	Weight kg	Order code
		**Multiple manifold** including seals, mounting screws, and guiding pins.	0,11	**9121658060**
		**Connection block S** including seals, mounting screws, and guiding pins. G1/4	0,15	**9121658064**
		**Connection block L** including seals, mounting screws, and guiding pins. G1/4	0,15	**9121658061**
		**End cover** including seals, mounting screws, and guiding pins.	0,16	**9121658066**
		**Intermediate block T** including seals, mounting screws, and guiding pins. G1/4	0,17	**9121658062**
		**Intermediate block L** including seals, mounting screws, and guiding pins. G1/4	0,17	**9121658065**
		**Blanking plate** including seals, mounting screws.	0,05	**9121658063**

Dimensions

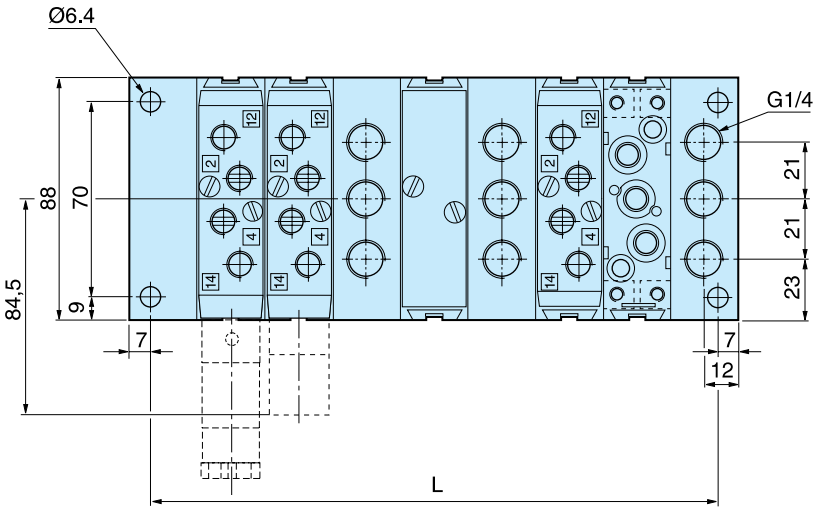

L = 34 + (Number of manifolds and Intermediate blocks x 24)

Connection block L and intermediate blocks L and T can be turned so that connection can be made from above or below.

Multiple manifolds must be fitted with the top indication line (a 10 mm long line) facing the same side on all manifolds.

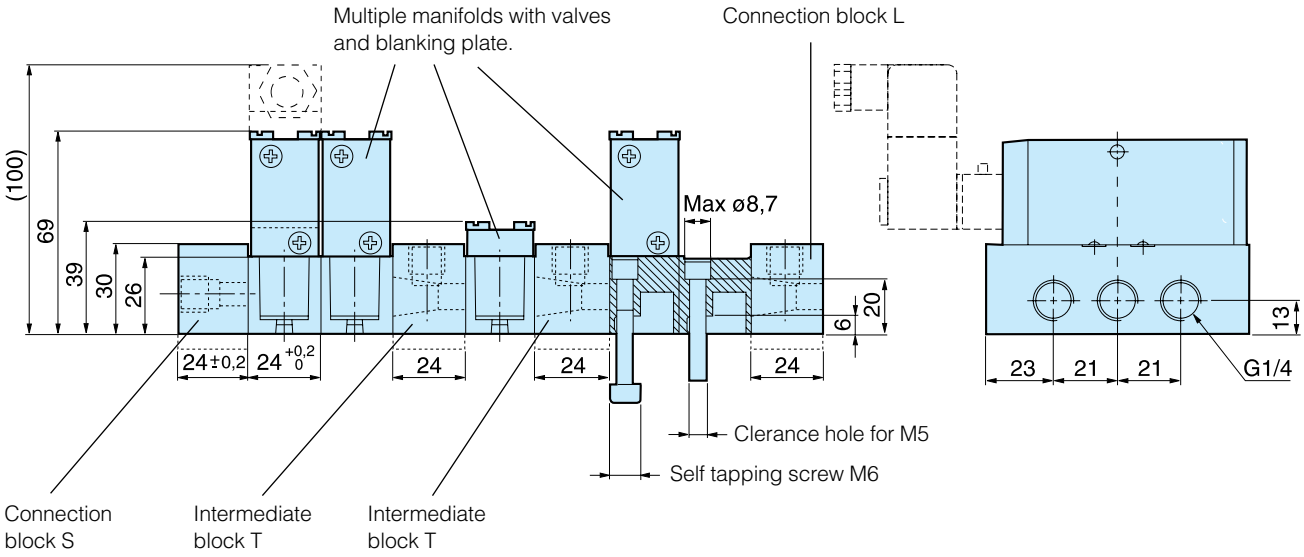

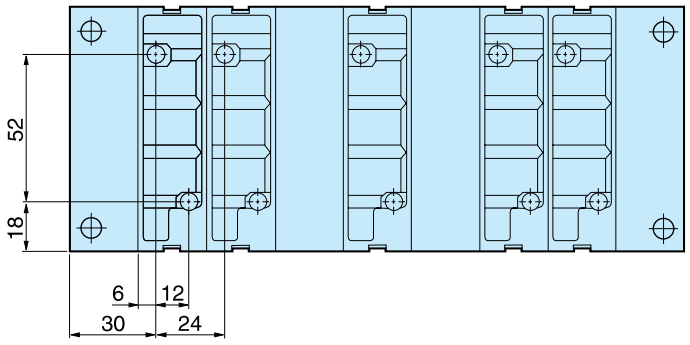

Accessories	Type P2LA / P2LB 3/2 valves	Weight kg	Order code
	**Manifold bar, P2LA/P2LB (not for P2LB with external air supply to solenoid valves)** incl. fasteners and O-ring. G3/8		
	For 2 valves	0,69	**91213202SXZ**
	For 4 valves	1,13	**91213204SXZ**
	For 6 valves	1,56	**91213206SXZ**
	For 8 valves	2,00	**91213208SXZ**
	For 10 valves	2,45	**91213210SXZ**
	**Blanking plate** for Manifold bar	0,10	**912132BPSXZ**

Dimensions

Manifold bar

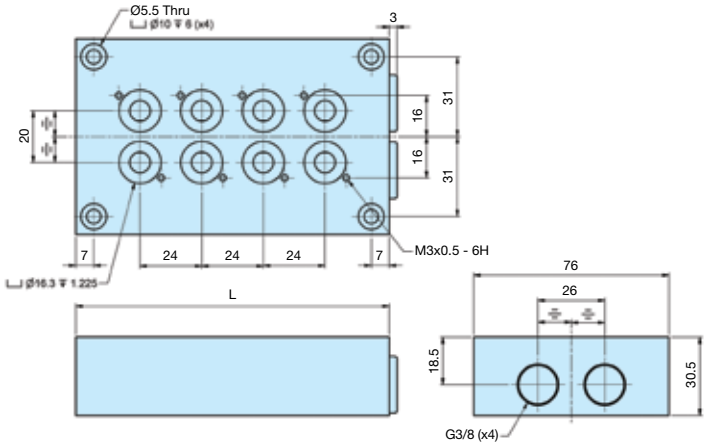

No. of valves	L mm
2	74
4	122
6	170
8	218
10	266

Blanking plate for manifold bar, P2LB



Accessories P2LA	Type	Weight kg	Order code
	**Manifold bar, P2LA** including seals, mounting screws. G3/8		
	For 4 valves	0,48	**9121658075**
	For 6 valves	0,63	**9121658076**
	For 8 valves	0,80	**9121658077**
	For 10 valves	0,98	**9121658078**
	For 12 valves	1,10	**9121658079**
	For 14 valves	1,23	**9121658099**
	Blanking plate, P2LA for Manifold bar	0,05	**9121658063**
	**Pressure bar, P2LA** for common air supply incl. O-rings and mounting screws. G1/4		
	For 2 valves	0,13	**9121658070**
	For 4 valves	0,20	**9121658071**
	For 6 valves	0,26	**9121658072**
	For 8 valves	0,33	**9121658073**
	**Blanking plate, P2LA** for Pressure bar	0,05	**9121658074**
	Assembly screws, P2LA in stainless steel for valve	0,02	**9121658043**
	Assembly screws, P2LA in stainless steel for blanking plate	0,01	**9121658044**
	O-ring kit, P2LA O-rings between valve and manifold bar/Pressure bar	0,01	**9121658046**

Dimensions

Manifold bar, P2LA

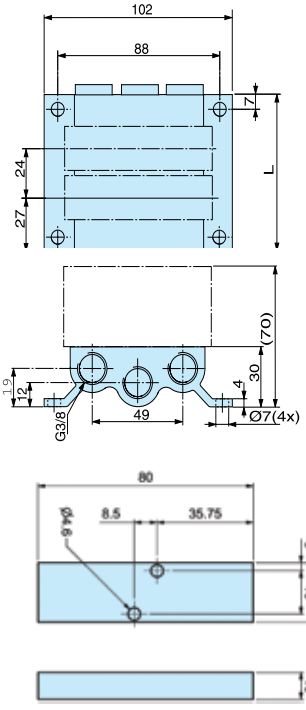

No. of valves	L mm
4	126
6	174
8	222
10	270
12	318
14	366

Blanking plate for manifold bar, P2LA



Pressure bar, P2LA

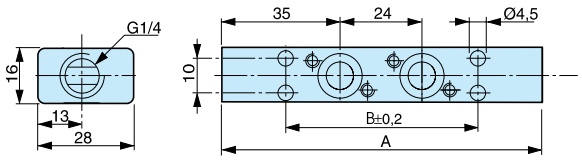

Blanking plate for pressure bar, P2LA



No. of valves	A mm	B mm
2	94	56
4	142	104
6	190	152
8	238	200

Accessories P2LB	Type	Weight kg	Order code
	**Manifold bar, P2LB, (not for P2LB with external air supply to solenoid valves)** incl. fasteners and O-ring. G3/8		
	For 2 valves	0,69	**9121594805X**
	For 4 valves	1,13	**9121594806X**
	For 6 valves	1,56	**9121594807X**
	For 8 valves	2,00	**9121594808X**
	For 10 valves	2,45	**9121594812X**
	**Blanking plate, P2LBX** for Manifold bar	0,10	**9121594809X**
	**Pressure bar, P2LBX** for common air supply incl. O-rings and mounting screws. G3/8		
	For 2 valves	0,38	**9127113301X**
	For 4 valves	0,53	**9127113302X**
	For 6 valves	0,68	**9127113303X**
	For 8 valves	0,83	**9127113304X**
	For 10 valves	0,99	**9127113305X**
	**Blanking plate P2LBX** for Pressure bar. G1/4	0,02	**9127113306X**
	Manifold Spares Kit P2LB Manifold O-rings, Manifold and Blanking Plate Screws	0,04	**P2LB/MAN-KIT**

Dimensions

Manifold bar, P2LB

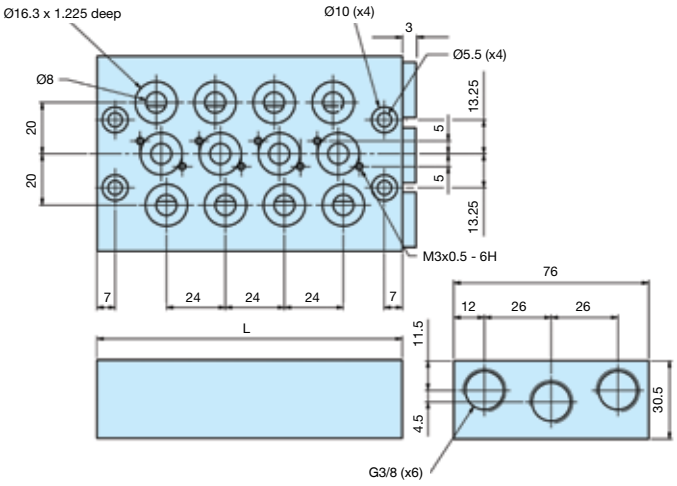

No. of valves	L mm
2	74
4	122
6	170
8	218
10	266

Blanking plate for manifold bar, P2LB



Pressure bar, P2LB

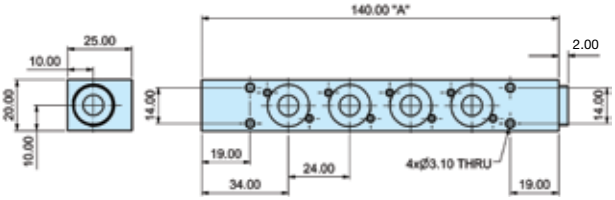

Blanking plate for pressure bar, P2LB



No. of valves	A mm
2	92
4	140
6	188
8	236
10	284

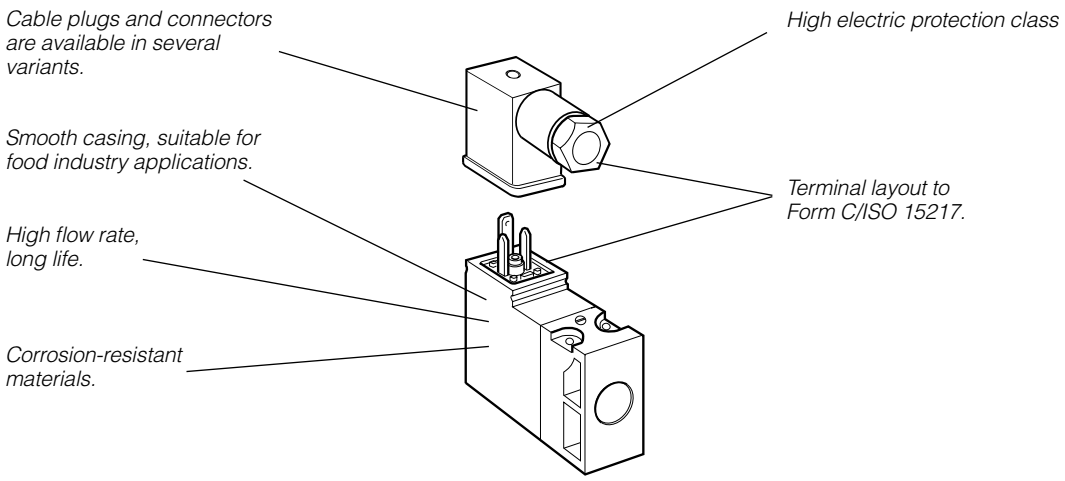

The P2E-•V solenoid operator range

The P2E-•V range of operators are normally closed (NC) 3/2 solenoid valves, with exceedingly compact dimensions in relation to their capacity.

International standard

The port connection pattern complies with a new French CNOMO standard (in process of drafting), with cable plug connections in accordance with Form C/ISO15217.

Compact design

Overall dimensions of the P2E-•V operators are substantially less than those of earlier generations of solenoid operators.

High flow capacity

High flow capacity relative to the electrical operating power as a result of optimised internal flow paths.

Corrosion-resistant design

The valve is made of thermoplastic material and stainless steel, with Viton™ and nitrile rubber seals for excellent corrosion resistance.

Clean lines suitable for food industry applications, P2E-QV

The valve has been designed in conjunction with several machine manufacturers and organisations in the food processing industry, with corrosion-resistant materials and smooth lines being important starting points. The valve and its accessories have been designed so that there are no gaps or crevices in which dirt could collect.

High reliability

Few moving parts result in high reliability, rapid changeover and very long life.

Low power demand

The solenoids have a power demand of 1.2 W at 24 V DC and 1.6 VA at 24 V AC, 115 V AC and 230 V AC.

High protection class

The protection class is IP 65 when connected using the cable plug with a moulded cable. When using the standard cable plug for fitting by the user, the protection class is IP65, the bare valve, with Fast-on connectors, has an encapsulation class of IP 20.

Insensitive to dirty air

The use of generously sized flow paths (1.0 mm diameter) means that the valve can be used in normal industrial environments without problems of blocking.

Manual override as option

The operators can be supplied with our without manual override. The manual override device is available as a screwdriver groove or with a control arm, and is either spring return (blue) or lockable (yellow).

Order key, solenoid operators (15mm)

P 2 E - Q V 3 2 C 3

	Valve family
P2E	Solenoid operator

	Subfamily
	Solenoid operator, 15 mm wide Electric connection acc. to ISO 15217 Form C El/supply connection on opposite side
K	Standard version
M	Mobile version
Q	Food industry version

	Valvetype/Function
3	 3/2 valve, normally closed (NC)

	Type of current
1	AC 50 Hz
2	DC
4	AC 50/60 Hz
5	Mobile and wide band only

	Voltage
B	12 V
C	24 V
D	48 V
F	115 V*
J	230 V*
W	37,5 V**
T	72 V**
Y	78 V**
V	96 V**
E	110 V**

	Overriders
0	Without
1	Non locking (blue)
2	Locking (yellow)
3	Extended non locking (blue)
4	Extended locking (yellow)

* For standard and food type only
** For mobile "M" version only

Technical data

	NC, Standard	NC, Food[1)]	NC, Mobile[2)]
Working pressure	0 to10 bar	0 to 10 bar	0 to 10 bar
Working temperature	-15 °C to +60 °C	-15 °C to +60 °C	-40 °C to +70 °C
Orifice	1,0 mm	1,0 mm	1,0 mm
Flow Qmax	33 Nl/min	33 Nl/min	22 Nl/min
Power, hold	DC 1,2 W / AC 1,6 VA *	DC 1,2 W / AC 1,6 VA *	DC 1,4 W
Power, surge	DC 1,2 W / AC 3,5 VA *	DC 1,2 W / AC 3,5 VA *	DC 1,4 W
Connection time	100%	100%	100%
Voltage tolerance	+10%/–15%	+10%/–15%	+25%/–30%
Electric connection:	Form C/ISO15217		
Port pattern:	To future CNOMO standard		
Protection:	IP 65		
Approval:	Some valves are UL 429 recognised and marked with the following symbol		
Working media:	All neutral media, such as compressed air, water, hydraulic oil and many gases.		
1) Design:	Completely smooth exterior, suitable for food industry.		
2) Mobile standard	According to European standard EN 50 155.		

* Power , hold for 230VAC 2.4VA
Power, surge for 230VAC 5.5VA

Transients

Interrupting the current through the solenoid coil produces momentary voltage peaks which, under unfavourable conditions, can amount to several hundred times the rated operating voltage. Normally, these transients do not cause problems, but to achieve the maximum life of relays in the circuit (and particularly of transistors, thyristors and integrated circuits) it is desirable to provide protection by means of voltage-dependent resistors (varistors). All cable plugs with a yellow LED also incorporate such protection.

Service life

With compressed air at 6 bar, 20 °C and complying with the requirements for compressed air quality as set out in ISO8573-1 norm (class 4 for dry and class 5 for filtered air), the valves should have a life of at least 50 million cycles.

Materials

Operator

Body, coil casing	Thermoplastic
Internal metal parts	Steel
Screws	Stainless steel
Bottom plug	Thermoplastic
Sealing materials	FPM (Viton™) and nitrile rubber

Cable head

Sheath	Thermoplastic
Retaining screw	Stainless steel, zinc-plated steel

15mm Solenoid Operators

Electrical connection EN175301-803 C/ISO15217 (Ex DIN 43650C)

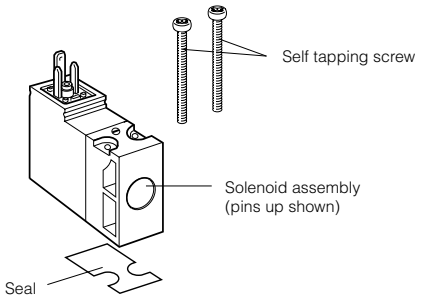

Solenoids 15 mm NC, standard



Voltage	Weight Kg	Order code Without manual override	Weight Kg	Order code Override, blue, non locking flush	Weight Kg	Order code Override, yellow, locking flush
12 VDC	0,038	**P2E-KV32B0**	0,038	**P2E-KV32B1**	0,038	**P2E-KV32B2**
24 VDC	0,038	**P2E-KV32C0**	0,038	**P2E-KV32C1**	0,038	**P2E-KV32C2**
48 VDC	0,038	**P2E-KV32D0**	0,038	**P2E-KV32D1**	0,038	**P2E-KV32D2**
24 VAC 50Hz	0,038	**P2E-KV31C0**	0,038	**P2E-KV31C1**	0,038	**P2E-KV31C2**
48 VAC 50/60Hz	0,038	**P2E-KV34D0**	0,038	**P2E-KV34D1**	0,038	**P2E-KV34D2**
115 VAC 50Hz/ 120 VAC 60Hz	0,038	**P2E-KV31F0**	0,038	**P2E-KV31F1**	0,038	**P2E-KV31F2**
230 VAC 50Hz/ 240 VAC 60Hz	0,038	**P2E-KV31J0**	0,038	**P2E-KV31J1**	0,038	**P2E-KV31J2**



Voltage	Weight Kg	Order code Override extended, non locking flush	Weight Kg	Order code Override extended, locking flush
24 VDC	0,038	**P2E-KV32C3**	0,038	**P2E-KV32C4**
24 VAC 50Hz	0,038	**P2E-KV31C3**	0,038	**P2E-KV31C4**

Solenoids 15 mm NC, mobile

(Note! Mounting screws included in basic valve)



Voltage	Weight Kg	Order code Without manual override	Weight Kg	Order code Override, blue, non locking flush
12 VDC	0,038	**P2E-MV35B0**	0,038	**P2E-MV35B1**
24 VDC	0,038	**P2E-MV35C0**	0,038	**P2E-MV35C1**
37,5 VDC	0,038	**P2E-MV35W0**	0,038	**P2E-MV35W1**
48 VDC	0,038	**P2E-MV35D0**	0,038	**P2E-MV35D1**
72 VDC	0,038	**P2E-MV35T0**	0,038	**P2E-MV35T1**
78 VDC	0,038	**P2E-MV35Y0**	0,038	**P2E-MV35Y1**
96 VDC	0,038	**P2E-MV35V0**	0,038	**P2E-MV35V1**
110 VDC	0,038	**P2E-MV35E0**	0,038	**P2E-MV35E1**

Solenoids 15 mm NC, food industry version

(Note! Mounting screws included in basic valve)



Voltage	Weight Kg	Order code Without manual override	Weight Kg	Order code Override, blue, non locking flush	Weight Kg	Order code Override, yellow, locking flush
24 VDC	0,038	**P2E-QV32C0**	0,038	**P2E-QV32C1**	0,038	**P2E-QV32C2**
48 VDC	0,038	**P2E-QV32D0**	0,038	**P2E-QV32D1**	0,038	**P2E-QV32D2**
24 VAC 50Hz	0,038	**P2E-QV31C0**	0,038	**P2E-QV31C1**	0,038	**P2E-QV31C2**
48 VAC 50/60Hz	0,038	**P2E-QV34D0**	0,038	**P2E-QV34D1**	0,038	**P2E-QV34D2**
115 V 50Hz/ 120 V 60Hz	0,038	**P2E-QV31F0**	0,038	**P2E-QV31F1**	0,038	**P2E-QV31F2**
230 VAC 50Hz/ 240 VAC 60Hz	0,038	**P2E-QV31J0**	0,038	**P2E-QV31J1**	0,038	**P2E-QV31J2**



Voltage	Weight Kg	Order code Override extended, non locking flush	Weight Kg	Order code Override extended, locking flush
24 VDC	0,038	**P2E-QV32C3**	0,038	**P2E-QV32C4**
24 VAC 50Hz	0,038	**P2E-QV31C3**	0,038	**P2E-QV31C4**
115 VAC 50 Hz	0,038	**P2E-QV31F3**	0,038	**P2E-QV31F4**
230 VAC 50 Hz	0,038	**P2E-QV31J3**	0,038	**P2E-QV31J4**

In accordance with the EU Machine Directive, EN 983, solenoid valves with manual override should have spring-return operating arms for safety.

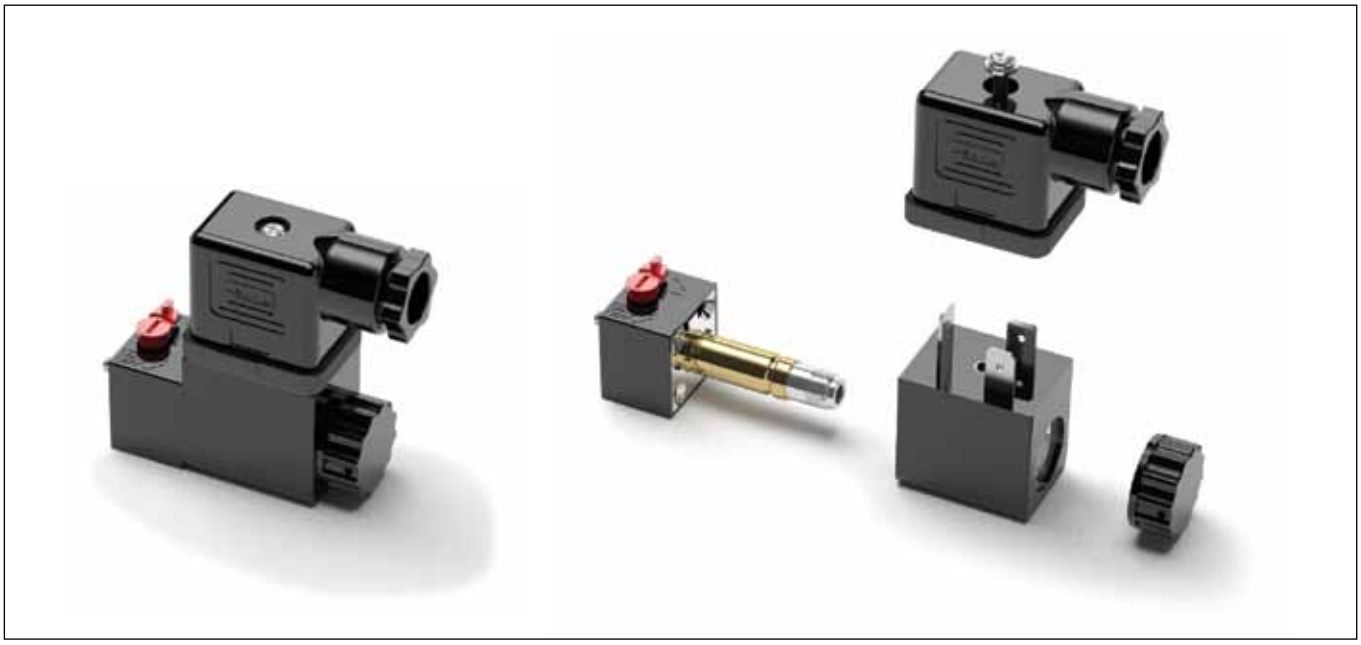

22mm Solenoid pilot options

The P2F P13*4* (NC) 3/2 solenoid pilot operators are designed for piloting pneumatic control valves with compressed air or other inert gases.

The P2F P operator is available for Normal operating pressures up to10 bar having an outlet orifice 1.3mm and exhaust orifice 1.5 mm. An alternative operator is also available having an outlet orifice of 0.8mm and exhaust orifice of 1.0mm for Xtreme maximum operating pressure of 16 bar and wide band voltage tollerances required for mobile applications.

For hard environnement , a metal operator (anodised aluminium) with brass manual override is available with a 1.2 mm outlet orifice and 1.3mm exhaust orifice. Different temperature range is covering inside , outside application.

Corrosion resistant design

The pilot operator body is manufactured in thermoplastic PA 6 material and the core tube brass/stainless steel. The plunger/core is made from stainless steel and the valve seats from FKM.

Solenoid Pilot Exhaust

These operators all exhaust out of the top of the core tube which is tapped M5. The standard solenoid nut fitted to the core tube is the Diffuser nut which allows the exhaust to escape to atmosphere. This nut also minimises ingress of dirt into the valve through this port. The alternative plastic knurled nut can be specified (refer to part number system) if the exhaust air needs to be captured and piped away using the M5 tapped port.

Coils

Coils are wound with enameled copper wire, having temperature index 180^{0}C with class F insulation (155^{0}C) and are encapsulated in Thermoplastic resin. When fitted with suitable connector and correct gasket they give protection to IP65.

Mobile Applications

Viking Xtreme valves are tested to +5g shock and vibration. Solenoid operated valves are designed to operate with wide voltage tolerance bands within the ambient temperature ranges stated in the technical section.

Manual Override options

The pilot operators can be supplied with or without manual override. The standard manual override is the monostable (spring return) extended brass override. Alternatively the bistable (locking) override can be specified as an alternative for the Normal duty 10bar option.

Spares

Solenoid operators are available as spares complete with mounting screws and seals. Coils and connectors should be ordered separately.

Order key, solenoid operators (22mm)

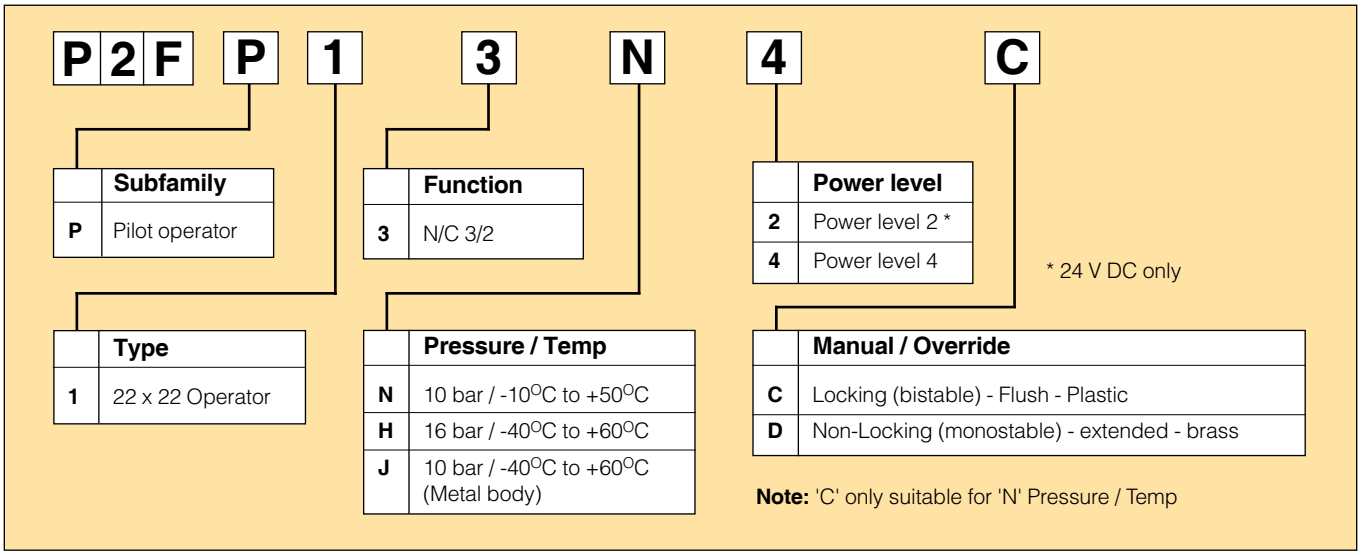

Technical data

	NC Normal	NC Xtreme	NC 22mm Xtreme (Mobile)	NC 30mm Xtreme (Mobile)	NC 30 mm Metal (Mobile)
Working pressure	0 to10 bar	0 to 16 bar	0 to10 bar	0 to 16 bar	0 to 10 bar
Ambient temperature	-10 °C to +50 °C	-40 °C to +60 °C	-40 °C to +60 °C	-40 °C to +60 °C	-40 °C to +60 °C
Orifice	1.3/1.5mm	0.8/1.0mm	0.8/1.0mm	0.8/1.0mm	1,2 mm / 1,3mm
Flow Qn @ 6 bar input 1 bar press drop. 1-2 l/m	55	20	20	20	60
Flow Qn @ 6 bar input 1 bar press drop. 2-3 l/m	70	30	30	30	70
Power (DC)	4.8W (2W Low power)	4.8W	6.0W	6.8W	6.8W
Power (AC)	8.5VA	8.5VA			
Voltage tolerance (Standard)	+/- 10%	+/- 10%			
Voltage tolerance (Mobile)			-10 to +30%	+/- 30%	+/- 30%
Duty cycle	100%	100%	100%	100%	100%
Insulation class	F	F	F	F	F
Electric connection	Ind Form B	Ind Form B	Ind Form B	Form A	Form A
Protection	IP65	IP65	IP65	IP65	IP65
Shock & Vibration	-	0 to +5g	0 to +5g	0 to +5g	0 to 5g
Approval	UL coil version available on request				
Working media	All neutral media such as compressed air and inert gases.				

Mobile applications

Solenoid operated Viking Xtreme duty valves for Mobile applications are fitted with the P2FP13H4D solenoid pilot operator. It has a 22mm footprint with 0.8/1.0mm orifice and will accept 22mm or 30mm coil options. The choice of coil option will depend on the voltage tolerance, operating ambient temperature range and maximum operating pressure. Use the technical data in the table above before selecting the coil type required, or contact our technical department.

Transients

Interrupting the current through the solenoid coil produces momentary voltage peaks which, under unfavourable conditions, can amount to several hundred times the rated operating voltage. Normally, these transients do not cause problems, but to achieve the maximum life of relays in the circuit (and particularly of transistors, thyristors and integrated circuits) it is desirable to provide protection by means of voltage-dependent resistors (varistors). All connectors/cable plugs with LED's listed on page 54 include this type of circuit protection.

Materials

Pilot Valve

Body:	Polyamide
Body:	Anodised aluminium for J type
Armature tube:	Brass (Normal) Stainless Steel 16 bar mobile
Plunger & core:	Corrosion resistant Cr-Ni steel
Seals:	FKM (Viton™)
Screws:	Stainless steel

Coil

Encapsualtion material:	Thermoplastic

22mm solenoid operator part numbers and spares

Solenoids coil standard 22mm

Voltage	Voltage tolerance	Temperature	Order code Form B	Power	Weight (Kg)	Use with Operator type
12V 50Hz	+-10%	-10°C / 50°C	**P2FCB440**	8,5VA	0.053	P2FP13N4
24V 50/60Hz	+-10%	-10°C / 50°C	**P2FCB442**	8,5VA	0.053	P2FP13N4
48V 50/60Hz	+-10%	-10°C / 50°C	**P2FCB449**	8,5VA	0.053	P2FP13N4
120V/50Hz, 120V/60Hz	+-10%	-10°C / 50°C	**P2FCB453**	8,5VA	0.053	P2FP13N4
230V/50Hz, 230V/60Hz	+-10%	-10°C / 50°C	**P2FCB457**	8,5VA	0.053	P2FP13N4
12V DC	+-10%	-10°C / 50°C	**P2FCB445**	4,8W	0.053	P2FP13N4
24V DC	+-10%	-10°C / 50°C	**P2FCB449**	4,8W	0.053	P2FP13N4
48V DC	+-10%	-10°C / 50°C	**P2FCB451**	4,8W	0.053	P2FP13N4

For pressure 0 to 10 bar

Solenoids coil low power 22mm

Voltage	Order code Form B	Power	Weight (Kg)	Use with Operator type
24V DC Low power	**P2FCB249**	2W	0.093	P2FP13N2

For pressure 0 to 10 bar

Solenoids coil 22mm Xtreme

Voltage	Voltage tolerance	Temperature	Order code Form B	Power	Weight (Kg)	Use with Operator type
12V 50Hz	+-10%	-40°C / 60°C	**P2FCB440**	8,5VA	0.053	P2FP13NH4D
24V 50/60Hz	+-10%	-40°C / 60°C	**P2FCB442**	8,5VA	0.053	P2FP13NH4D
48V 50/60Hz	+-10%	-40°C / 60°C	**P2FCB449**	8,5VA	0.053	P2FP13NH4D
120V/50Hz, 120V/60Hz	+-10%	-40°C / 60°C	**P2FCB453**	8,5VA	0.053	P2FP13NH4D
230V/50Hz, 230V/60Hz	+-10%	-40°C / 60°C	**P2FCB457**	8,5VA	0.053	P2FP13NH4D
12V DC	+-10%	-40°C / 60°C	**P2FCB445**	4,8W	0.053	P2FP13NH4D
24V DC	+-10%	-40°C / 60°C	**P2FCB449**	4,8W	0.053	P2FP13NH4D
48V DC	+-10%	-40°C / 60°C	**P2FCB451**	4,8W	0.053	P2FP13NH4D

For pressure 0 to 16 bar for A+B & 12 bar for C+D

Solenoids coil mobile voltage 22mm

Voltage	Voltage tolerance	Temperature	Order code Form B	Power	Weight (Kg)	Use with Operator type
12V DC	-10% / +30%	-40°C / + 60°C	**P2FCB447**	6W	0.053	P2FP13H4D
24V DC	-10% / +30%	-40°C / + 60°C	**P2FCB448**	6W	0.053	P2FP13H4D

For pressure 0 to 16 bar for A+B & 12 bar for C+D

Solenoids coil Mobile voltage 30mm

Voltage	Voltage tolerance	Temperature	Order code Form A	Power	Weight (Kg)	Use with Operator type
12V DC	+/- 30%	-40°C / +60°C	**P2FCA447**	6,8W	0.09	P2FP13H4D
24V DC	+/- 30%	-40°C / +60°C	**P2FCA448**	6,8W	0.09	P2FP13H4D
48V DC	+/- 30%	-40°C / +60°C	**P2FCA474**	6,8W	0.09	P2FP13H4D
72V DC	+/- 30%	-40°C / +60°C	**P2FCA470**	6,8W	0.09	P2FP13H4D
96V DC	+/- 30%	-40°C / +60°C	**P2FCA471**	6,8W	0.09	P2FP13H4D
110V DC	+/- 30%	-40°C / +60°C	**P2FCA472**	6,8W	0.09	P2FP13H4D

For pressure 0 to 16 bar for A+B & 12 bar for C+D

Solenoids coil Mobile voltage 30mm

Voltage	Voltage tolerance	Temperature	Order code Form A	Power	Weight (Kg)	Use with Operator type
12V DC	+/- 30%	-40°C / +60°C	**P2FCA447**	6,8W	0.09	P2FP13J4
24V DC	+/- 30%	-40°C / +60°C	**P2FCA448**	6,8W	0.09	P2FP13J4
48V DC	+/- 30%	-40°C / +60°C	**P2FCA474**	6,8W	0.09	P2FP13J4
72V DC	+/- 30%	-40°C / +60°C	**P2FCA470**	6,8W	0.09	P2FP13J4
96V DC	+/- 30%	-40°C / +60°C	**P2FCA471**	6,8W	0.09	P2FP13J4
110V DC	+/- 30%	-40°C / +60°C	**P2FCA472**	6,8W	0.09	P2FP13J4

For pressure 0 to 10 bar

Spare Solenoid Nuts

Valves requiring captured exhaust should be fitted with plastic knurled nut

Order code
P2FNP

Valves with vented exhaust are fitted with diffuser plastic nut

Order Code
P2FND

Spare Solenoid Operators

Solenoid pilot operator 22mm NC, Normal duty (Max Operating pressure 10bar, Temp –10^{0}C to +50^{0}C)

Order code (with locking bi-stable m/o)	weight Kg	Order code (with Non-locking monostable m/o)	weight Kg
P2FP13N4C	0.05kg	**P2FP13N4D**	0.05kg

Low power pilot operator NC, Normal duty (Max Operating pressure 10bar, Temp –10^{0}C to +50^{0}C)

Order code (with locking bi-stable m/o)	weight Kg	Order code (with Non-locking monostable m/o)	weight Kg
P2FP13N2C	0.05kg	**P2FP13N2D**	0.05kg

Solenoid pilot operator 22mm NC, Xtreme duty (Max Operating pressure 16bar, Temp –40^{0}C to +60^{0}C)

Order code (with Non-locking (monostable m/o)	weight Kg
P2FP13H4D	0.05kg

Solenoid pilot operator 22mm NC Mobile metal (Max Operating pressure 10bar, Temp –40^{0}C to +60^{0}C)

Order code (with brass non locking m/o)	weight Kg	Order code (with brass locking m/o)	weight Kg	Order code No manual override	weight Kg
P2FP13J4B	0.04kg	**P2FP13J4C**	0.04kg	**P2FP13J4A**	0.04kg

Note.
Solenoid pilot operators are fitted to the Viking valve range. Order the above part numbers for spares. The operators are supplied with mounting screws and interface 'O' rings.
Coils and connectors must be ordered separately.

Solenoid Connectors / Cable Plugs EN175301-803

	Description	Order code 15mm Form C/ISO15217	Order code 22mm Industrial Form B	Order code 30mm Form A/ISO4400
With large headed screw suitable for mounting in inaccessible or recess position	Standard IP65	**P8C-C**		
	24V DC LED and protection IP65	**P8C-C26C**		
	110V AC LED and protection IP65	**P8C-C21E**		
With standard screw	Standard IP65 without flying lead	**P8C-D**	**3EV10V10**	**3EV290V10**
	With LED and protection 24V AC/DC	**P8C-D26C**	**3EV10V20-24**	**3EV290V20-24**
	With LED and protection 110V AC/DC	**P8C-D21E**	**3EV10V20-110**	**3EV290V20-110**
	With LED and protection 230V AC		**3EV10V20-230**	
With cable 	Standard with 2m cable IP65	**P8L-C2**		
	Standard with 5m cable IP65	**P8L-C5**		
	24V AC/DC, 2m cable LED and protection IP65	**P8L-C226C**		
	24V AC/DC, 5m cable LED and protection IP65	**P8L-C526C**	**3EV10V20-24L5**	**3EV290V20-24L5**
	24V AC/DC, 10m cable LED and protection IP65	**P8L-CA26C**		
	110V AC/DC, 2m cable LED and protection IP65	**P8L-C221E**		
	110V AC/DC, 5m cable LED and protection IP65	**P8L-C521E**	**3EV10V20-110L5**	
	230V AC, 5m cable LED and protection IP65		**3EV10V20-230L5**	





P8C-C	**P8C-D26C**	**P8L-C226C**
P8C-D	**P8C-D21E**	**P8L-C526C**
P8L-C2	**P8C-C26C**	**P8L-CA26C**
P8L-C5	**P8C-C21E**	**P8L-C221E**
3EV10V10		**P8L-C521E**
3EV290V10	**3EV10V20-24**	**3EV10V20-24L5**
	3EV10V20-110	**3EV10V20-110L5**
	3EV10V20-230	**3EV10V20-230L5**

Cable Plug Dimensions (mm)

Solenoid operators P2E-•V...

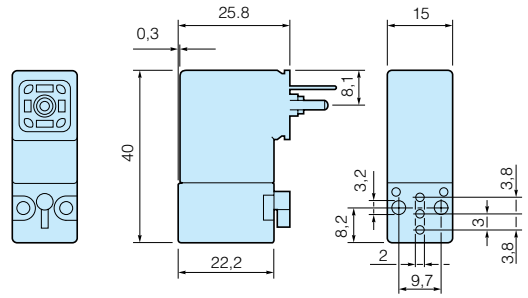

Solenoid operators P2FP...

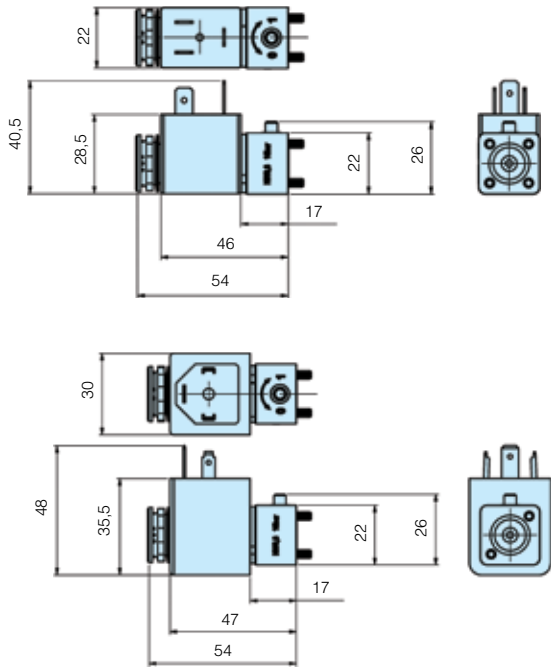

Cable plugs

P8C-C
P8C-C26C
P8C-C21E
P8C-D
P8C-D26C
P8C-D21E



Cable plugs with cables

P8L-C2
P8LC5
P8L-C226C
P8L-C526C
P8L-CA26C
P8L-C221E
P8L-C521E



Cable plugs Form B

3EV10V10
3EV10V20-24
3EV10V20-110
3EV10V20-230
3EV10V20-24L5
3EV10V20-110L5
3EV10V20-230L5



Cable plugs Form A

3EV290V10
3EV290V20-24
3EV290V20-24L5

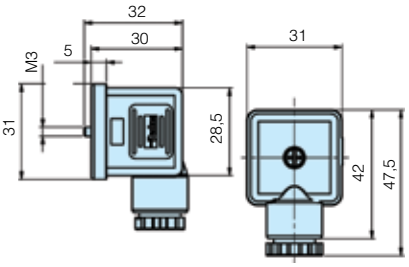

Accessories

Sintered bronze series



Port	Order code	Pack Qty
M5	9721900005	1
G1/8	9090050700	1
G1/4	P6M-BAA2	1
G3/8	9090050900	1
G1/2	9090051000	1

Male straight connectors - Parallel thread



Tube Ø1	Thread B	Order code	Box Qty
4	1/8	F4PMB4-1/8	20
6	1/8	F4PMB6-1/8	30
6	1/4	F4PMB6-1/4	30
8	1/8	F4PB8-1/8	40
8	1/4	F4PB8-1/4	30
8	3/8	F4PB8-3/8	20
10	1/4	F4PB10-1/4	20
10	3/8	F4PB10-3/8	20
10	1/2	F4PB10-1/2	10
12	1/4	F4PB12-1/4	10
12	3/8	F4PB12-3/8	10
12	1/2	F4PB12-1/2	10
14	3/8	F4PB14-3/8	10
14	1/2	F4PB14-1/2	10

Parker Worldwide

Europe, Middle East, Africa

AE – United Arab Emirates, Dubai
Tel: +971 4 8127100
parker.me@parker.com

AT – Austria, Wiener Neustadt
Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe, Wiener Neustadt
Tel: +43 (0)2622 23501 900
parker.easteurope@parker.com

AZ – Azerbaijan, Baku
Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles
Tel: +32 (0)67 280 900
parker.belgium@parker.com

BY – Belarus, Minsk
Tel: +375 17 209 9399
parker.belarus@parker.com

CH – Switzerland, Etoy
Tel: +41 (0)21 821 87 00
parker.switzerland@parker.com

CZ – Czech Republic, Klecany
Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst
Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup
Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid
Tel: +34 902 330 001
parker.spain@parker.com

FI – Finland, Vantaa
Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve
Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens
Tel: +30 210 933 6450
parker.greece@parker.com

HU – Hungary, Budapest
Tel: +36 23 885 475
parker.hungary@parker.com

IE – Ireland, Dublin
Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IT – Italy, Corsico (MI)
Tel: +39 02 45 19 21
parker.italy@parker.com

KZ – Kazakhstan, Almaty
Tel: +7 7272 505 800
parker.easteurope@parker.com

NL – The Netherlands, Oldenzaal
Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Asker
Tel: +47 66 75 34 00
parker.norway@parker.com

PL – Poland, Warsaw
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal, Leca da Palmeira
Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest
Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow
Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga
Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SK – Slovakia, Banská Bystrica
Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto
Tel: +386 7 337 6650
parker.slovenia@parker.com

TR – Turkey, Istanbul
Tel: +90 216 4997081
parker.turkey@parker.com

UA – Ukraine, Kiev
Tel +380 44 494 2731
parker.ukraine@parker.com

UK – United Kingdom, Warwick
Tel: +44 (0)1926 317 878
parker.uk@parker.com

ZA – South Africa, Kempton Park
Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

North America

CA – Canada, Milton, Ontario
Tel: +1 905 693 3000

US – USA, Cleveland
Tel: +1 216 896 3000

Asia Pacific

AU – Australia, Castle Hill
Tel: +61 (0)2-9634 7777

CN – China, Shanghai
Tel: +86 21 2899 5000

HK – Hong Kong
Tel: +852 2428 8008

IN – India, Mumbai
Tel: +91 22 6513 7081-85

JP – Japan, Tokyo
Tel: +81 (0)3 6408 3901

KR – South Korea, Seoul
Tel: +82 2 559 0400

MY – Malaysia, Shah Alam
Tel: +60 3 7849 0800

NZ – New Zealand, Mt Wellington
Tel: +64 9 574 1744

SG – Singapore
Tel: +65 6887 6300

TH – Thailand, Bangkok
Tel: +662 186 7000-99

TW – Taiwan, Taipei
Tel: +886 2 2298 8987

South America

AR – Argentina, Buenos Aires
Tel: +54 3327 44 4129

BR – Brazil, Sao Jose dos Campos
Tel: +55 800 727 5374

CL – Chile, Santiago
Tel: +56 2 623 1216

MX – Mexico, Apodaca
Tel: +52 81 8156 6000

European Product Information Centre
Free phone: 00 800 27 27 5374
(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

© 2014 Parker Hannifin Corporation. All rights reserved.

Catalogue PDE2569TCUK - V2 - January 2014

HANLEY CONTROLS
CLONMEL
www.hccl.ie

Your local authorized Parker distributor