



The snap fittings enable a circuit to be isolated without the need to vent the complete system.

Ø metric:
6 to 10 mm

Technical Characteristics

- **Compatible Fluids:** Compressed air
- **Working Pressure:** 0 to 10 bar
- **Working Temperature:** -20°C to +80°C
- **Flow Characteristics at 6 bar:** DN 5 mm: 1000 NI/min
DN 7 mm: 1900 NI/min


Tightening Torque (BSPT)	Thread	G1/8	G1/4	G3/8
	daN.m	0.8	1.2	3

Advantages

- Partial venting of systems for energy and time-saving during maintenance operations
- Protection of individuals by maintaining pressure if necessary
- Audible click indicates connection
- Circuit identification by coloured rings (on request)

Component Materials

Silicone-free

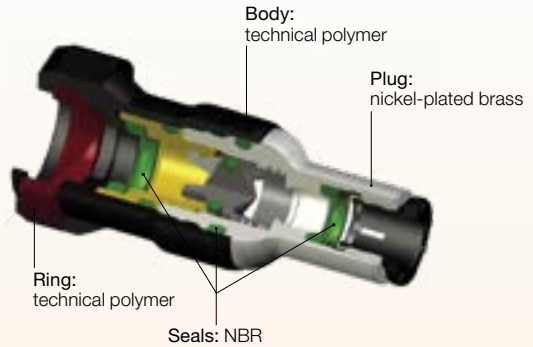


Regulations


- RoHS
- REACH
- PED

Operation



Circuit Closed

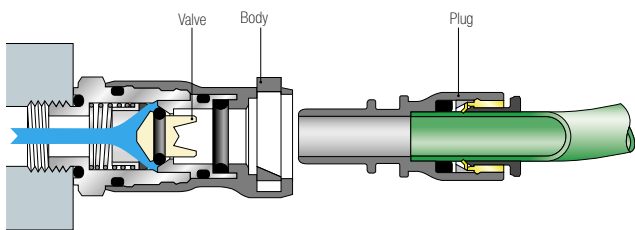

Circuit Open

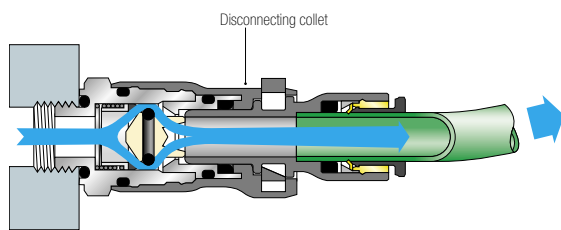


Flow Characteristics - Pressure Drop

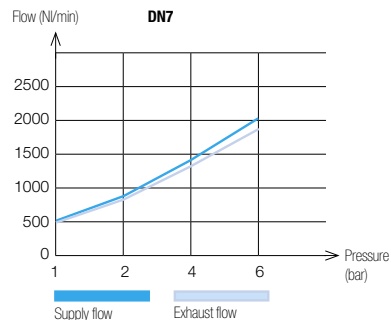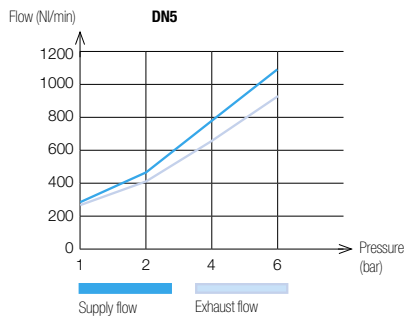



7926 Body with Push-In Connection


Technical polymer, Nickel-plated brass, NBR



DN	ØD		G	L	Kg
5	6	7926 05 06	18.5	44	0.020
5	8	7926 05 08	18.5	49	0.024
7.3	10	7926 07 10	22	58.5	0.044

7960 Straight Probe, Push-In Connection


Technical polymer, NBR



DN	ØD		G	H	H1	Kg
5	6	7960 05 06	13.5	36.5	17.5	0.007
5	8	7960 05 08	13.5	37	18	0.003
7.3	10	7960 07 10	16	41	20.5	0.004

7921 Body with Male BSPP Thread


Technical polymer, Nickel-plated brass, NBR



DN	C		E	F	G	H	Kg
5	G1/8	7921 05 10	5.5	16	18.5	31.5	0.021
5	G1/4	7921 05 13	5.5	16	18.5	31.5	0.023
7.3	G1/4	7921 07 13	5.5	20	22	37.5	0.039
7.3	G3/8	7921 07 17	5.5	20	22	37.5	0.040

7961 Straight Probe, Male BSPP Thread

Technical polymer, Nickel-plated brass, NBR



DN	C		E	F	G	H	H1	Kg
5	G1/8	7961 05 10	5.5	13	13.5	46	27	0.017
5	G1/4	7961 05 13	5.5	16	13.5	46	27	0.020
7.3	G1/4	7961 07 13	5.5	16	16	51.5	31	0.025
7.3	G3/8	7961 07 17	5.5	20	16	51.5	31	0.034